


FEMALE END VIEW (J1)		FEMALE END VIEW (J2)		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NEOPRENE
A = RED (15 AWG) B = BLACK (15 AWG) C = DRAIN		A = RED (15 AWG) B = BLACK (15 AWG)		MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONNECTOR TYPE/STYLE - MS 3106M SHELL SIZE - 10SL INSERT ARRANGEMENT - 3S		CONNECTOR TYPE/STYLE - MS 3106M SHELL SIZE - 10SL INSERT ARRANGEMENT - 4S		CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
				COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
				MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
				RATED CURRENT [A]	13.0 A
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	TPU/GRAY
				CONDUCTOR INSULATION MATERIAL	FOAMED HDPE (DATA), PVC (POWER)
				NUMBER OF CONDUCTORS	2x15 AWG, 2x18 AWG,
				DRAIN/SHIELD	18 AWG/FOIL (PAIRS), ALUM. FOIL (OVERALL), T-C BRAIDED
				TEMPERATURE RATING	-40° to +80°C (-40° to +176°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68
				CONNECTOR TYPE	MIL-DTL-5015

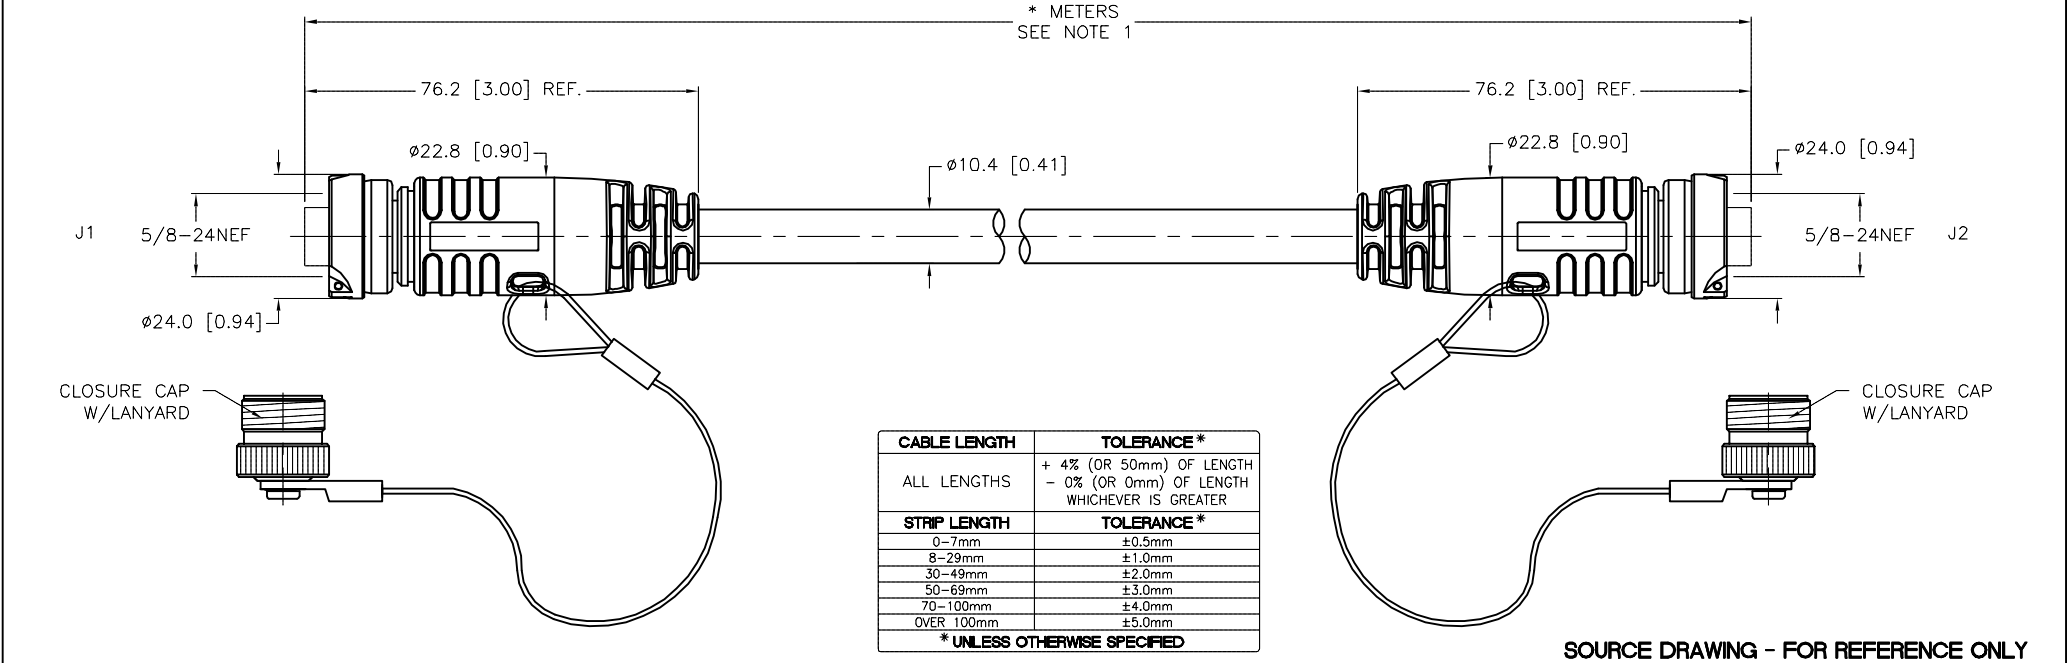

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH. 2. "/S1599" DESIGNATES ATTACHED MATING CLOSURE CAPS TO CORDSET END. 3. UNUSED CONDUCTOR TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
					1.				DRFT TV DATE 01/24/17		DESCRIPTION MS 3106M-10SL-3S-0633-*--10SL-4S/S1599				
					2.										
					3.										
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD J.L.		SCALE 1=1.5		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV C	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING											
FINISH		SEE SPECIFICATIONS													
C	UPDATE CLOSURE CAPS			RDS	02/23/18	64384									
REV	DESCRIPTION			BY	DATE	ECO NO.						FILE: 777039163		SHEET 1 OF 1	