
MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS		
			CONTACT CARRIER MATERIAL	NYLON OR TPU	
4		<1	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
			CONTACT MATERIAL/PLATING	BRASS/GOLD	
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
		P1	RATED CURRENT [A]	2.0 A	
		4 ← ← ← ← ← ← ← ← ← ← ← ← ← ← ← ← ← ← ←	RATED VOLTAGE [V]	60 VAC, 75 VDC	
		$3 \leftarrow -                                  $	OUTER JACKET MATERIAL/COLOR	PVC/YELLOW	
2			CONDUCTOR INSULATION MATERIAL	PVC	
			CONDUCTORS [AWG]	3x24 AWG	
A engro	A pico		TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	
tasi.	Valsi.		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	



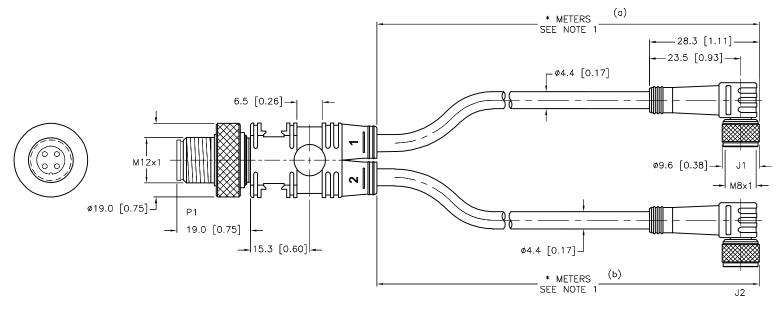

		-							
RELATED DOCUMENTS 1.	3RD ANGLE PROJECTION	CONFIDE	DRAWING IS NTIAL AND THE				3000 C. MINNEAPO	ILIS, MN	55441
2. 3.	$\odot$	INC. U DOCUM	ISE OF THIS ENT WITHOUT PERMISSION IS			CK	(763)	-544-1 553-7 553-0	
4.	т -	PR	OHIBITED.					w.turck.u	
MATERIAL		DRFT	RDS	DATE 02/23/17		4.4-2PKW	414 * /:	* /c1	560
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD L.H. S		SCALE 1=1.0	VDING	4.4-ZFRW	(a) (b)		502
	DRAWING ARE FOR REFERENCE ONLY			ASUREMENT	IDENTIFICATION	NO			REV
FINISH	CONTACT TURCK	N		ER [ INCH ]	IDENTIFICATION	NO.			
SEE SPECIFICATIONS	FOR MORE								A
		DO NOT SCALE		THIS DRAWING	FILE: 77703	9200		SHEET	1 OF 1

CABLE LENGTH	TOLERANCE*				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8–29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70–100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S1562" DESIGNATES SPECIAL WIRING DIAGRAM.

А	DRAWING RELEASE	RDS	03/01/17		
REV	DESCRIPTION	BY	DATE	ECO NO.	