




MALE END VIEW		SPECIFICATIONS	
 A = GREEN B = BLACK C = WHITE	 1 = GREEN 2 = N/C 3 = BLACK 4 = WHITE 	CONTACT CARRIER MATERIAL	TPU or NYLON (P2)
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK (P1), YELLOW (P2)
		CONTACT MATERIAL/PLATING	BRASS/GOLD (P2)
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P2)
		DEUTSCH CONNECTOR	DT04-3P-E004 (P1)
		DEUTSCH WEDGELOCK	W3P (P1)
		DEUTSCH TERMINALS	0462-202-16141 (P1)
		OUTER JACKET MATERIAL/COLOR	TPE/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		RATED CURRENT [A]	4.0 A
		OPERATING VOLTAGE [V]	250 V
		NUMBER OF CONDUCTORS [AWG]	3x18 AWG
		PROTECTION CLASS	IP67
		CABLE APPROVALS	(UL) TC DIRECT BURIAL 90C DRY/WET 600V SUNLIGHT RESISTANT OIL RES II -40C OR WTTCC 90C DRY/WET 1000V OR AWM 105C 600V OR CSA CIC/TC PVC/N 90C DRY 75C WET 600V FT1 FT4 SUNLIGHT RESISTANT -40C

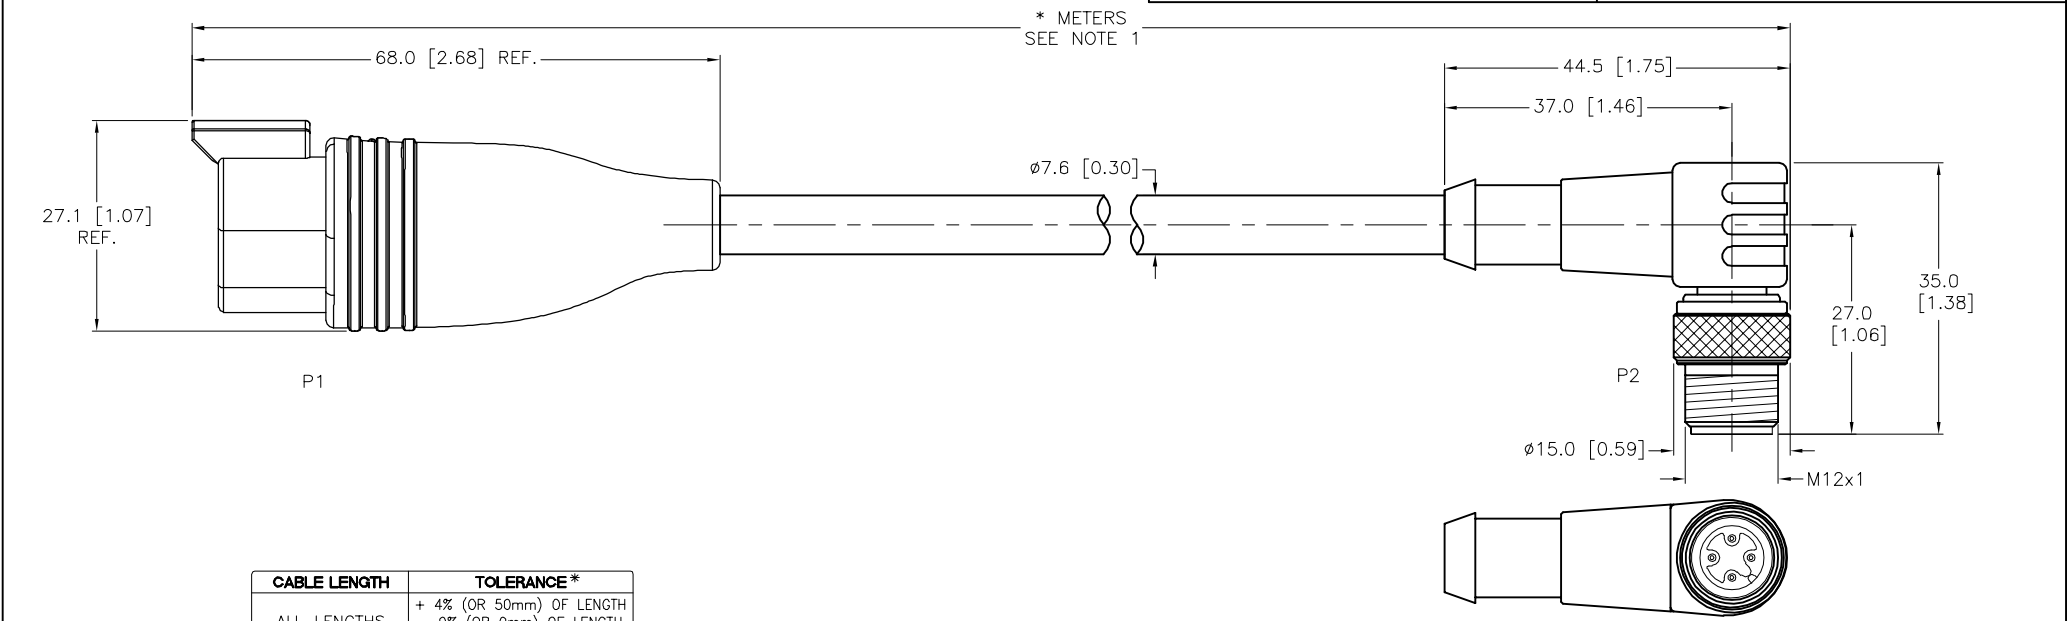


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RDS		DATE 03/21/17	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD T.S.		SCALE 1=1.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION DT04-3P-2145-*M-WSC 4T	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV B	
SEE SPECIFICATIONS					FILE: 777039340		SHEET 1 OF 1			