




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NEOPRENE
A = WHITE B = GREEN C = YELLOW D = GRAY E = BROWN F = BLUE		A = WHITE B = GREEN C = YELLOW D = GRAY E = BROWN F = BLUE		MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONNECTOR TYPE/STYLE - GT06M SHELL SIZE - 14S INSERT ARRANGEMENT - 6S		CONNECTOR TYPE/STYLE - GT06M SHELL SIZE - 14S INSERT ARRANGEMENT - 6P		CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
				COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
				MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
				RATED CURRENT [A]	8.0 A
				RATED VOLTAGE [V]	200 V
				OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS	6x18 AWG
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
				CONNECTOR TYPE	MIL-DTL-5015

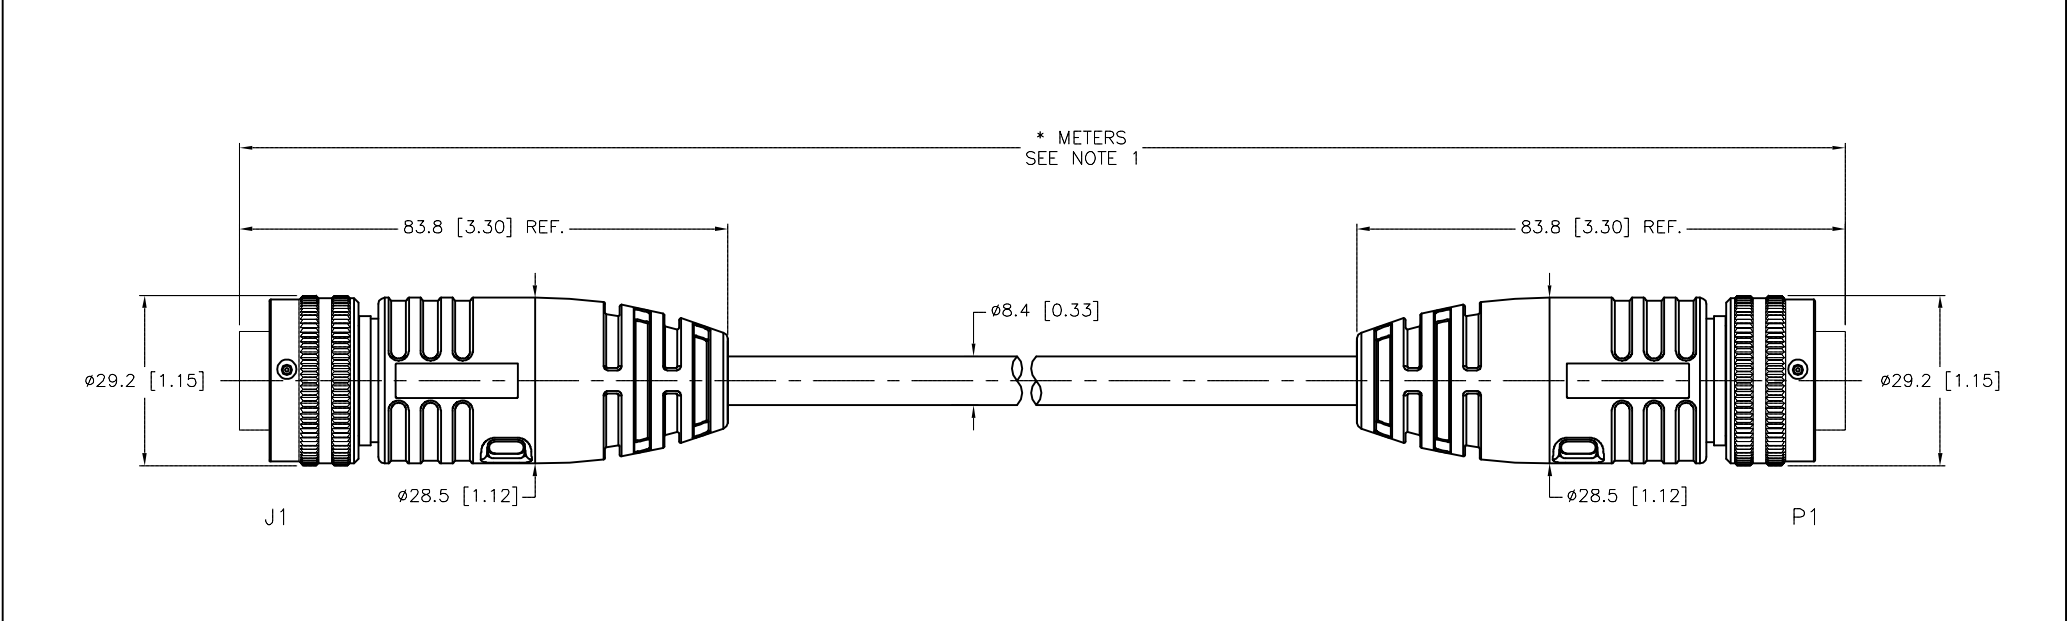


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT TV APVD L.H.		DATE 03/20/17 SCALE 1=1.3	
MATERIAL		SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION GT06M-14S-6S-575-* - 14S-6P	
FINISH		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
A		DRAWING RELEASE		TV		04/28/17	
REV		DESCRIPTION		BY		DATE	
						ECO NO.	
						DO NOT SCALE THIS DRAWING	
						FILE: 777039374	
						SHEET 1 OF 1	