



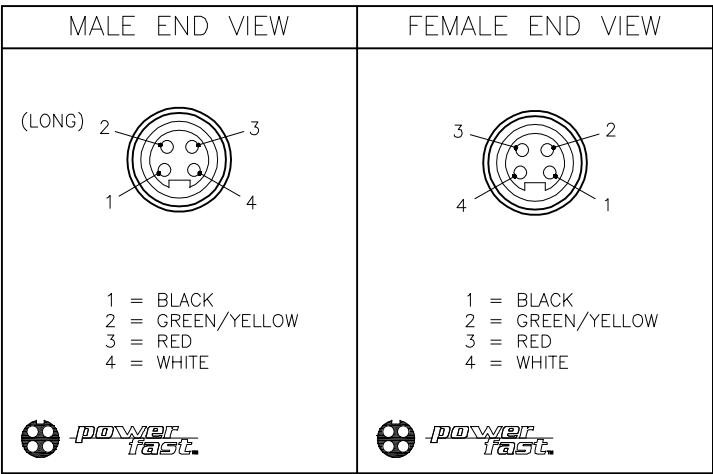

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
COUPLING NUT MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED
RATED CURRENT [A]	35.0 A
RATED VOLTAGE [V]	600 VAC
CABLE JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON
NUMBERS OF CONDUCTORS [AWG]	4x10 AWG
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
APPROVALS AND CERTIFICATIONS	UL 2237
CABLE APPROVALS	UL 1277 TC EXPOSED RUN (ER) AND DIRECT BURIAL (DB) CSA CIC/TC FLAME RETARDANT TO FT4 90C DRY/WET

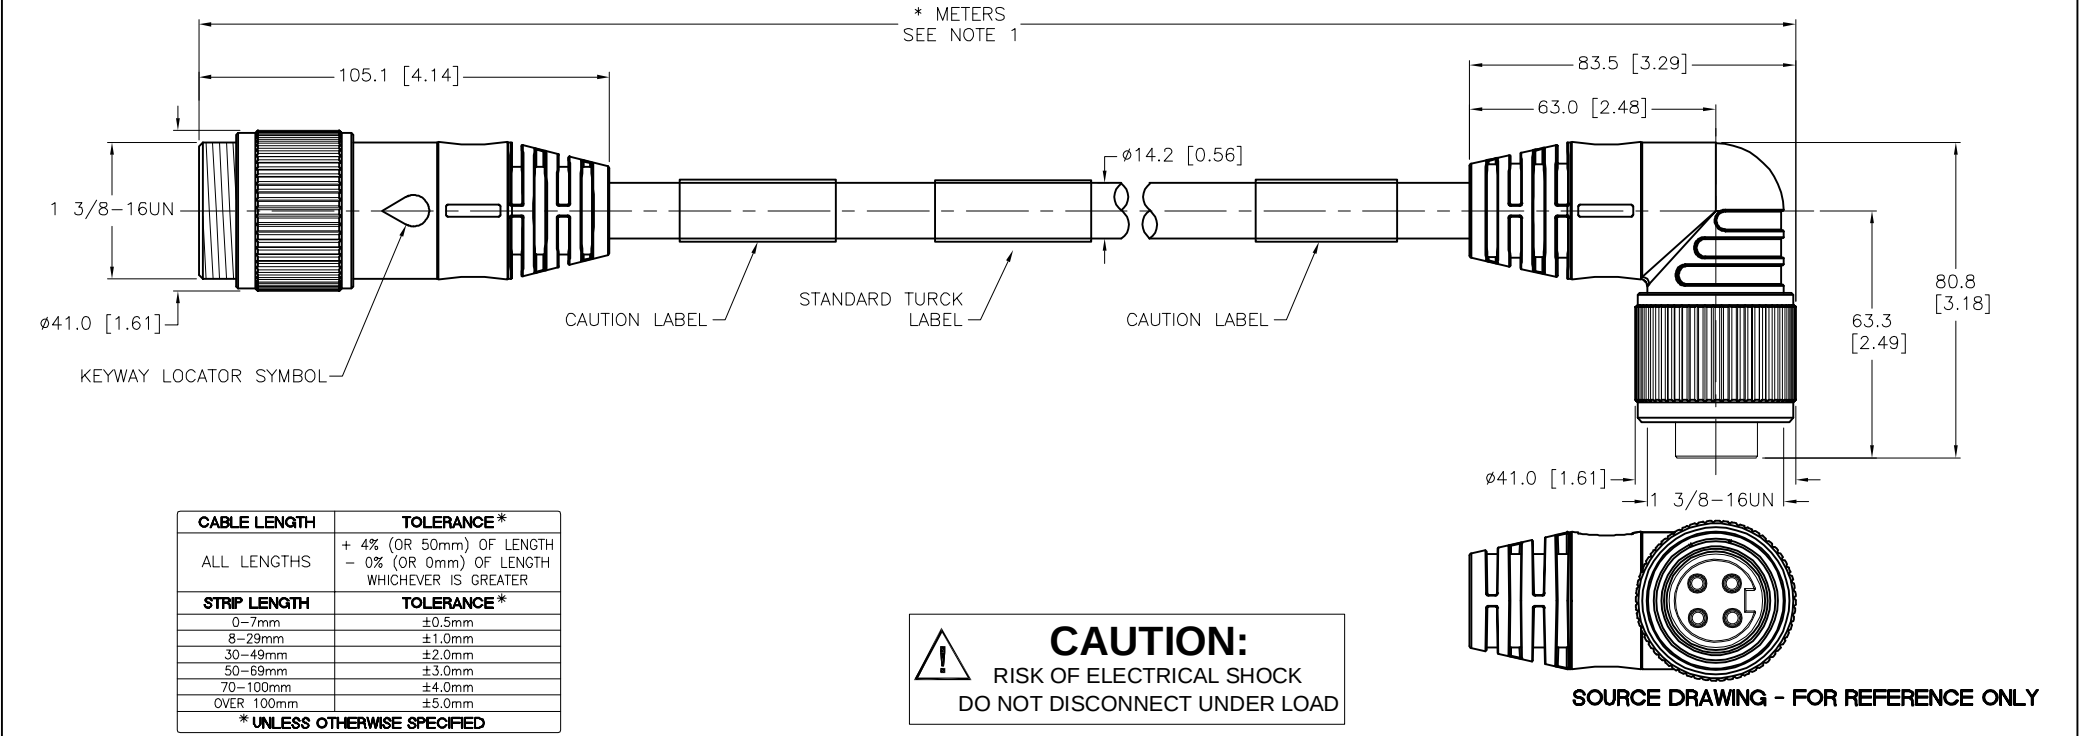

NOTES:


1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S3276" DESIGNATES TPE CABLE JACKET.

3. "/S4000" DESIGNATES TC-ER CABLE.

4. SERIALIZED PRODUCT LABEL

E	UPDATED NOTES	AS	03/04/25	81028
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.									
MATERIAL		DRFT TV		DATE 04/21/17		DESCRIPTION			
SEE SPECIFICATIONS		APVD L.H.		SCALE 1=2.0		GSDA GKDWA 40-*M/S3276/S4000			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING				IDENTIFICATION NO.			REV
SEE SPECIFICATIONS						CONTACT TURCK FOR MORE INFORMATION			E
						FILE: 777039545			SHEET 1 OF 1