


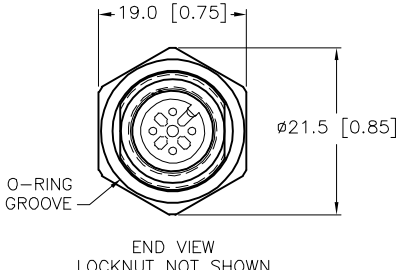
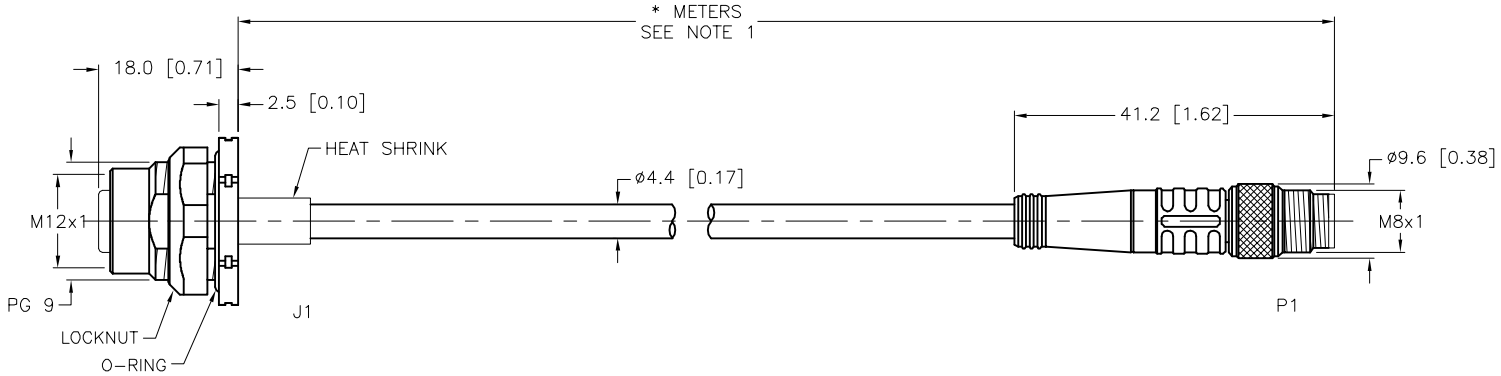


FEMALE END VIEW	MALE END VIEW	TYPICAL PANEL CUTOUT	SPECIFICATIONS	
 1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		CONTACT CARRIER MATERIAL	NYLON OR TPU
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW (P1)
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)
			HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL (P2)
			O-RING MATERIAL	EPDM (J1)
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	125 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x24 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67


			
		* METERS SEE NOTE 1	

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S830" DESIGNATES 24 AWG.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.				DRFT		DATE 04/27/17	
2.				NF			
3.				APVD			
4.				N.M.			
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		FKFD 4--*-PSG 4M/S830	
FINISH						IDENTIFICATION NO.	
SEE SPECIFICATIONS						REV	
						C	
C UPDATE DESCRIPTION & ORIENTATION		NF 09/25/18 66629		DO NOT SCALE THIS DRAWING		FILE: 777039570	
REV DESCRIPTION		BY DATE ECO NO.				SHEET 1 OF 1	