

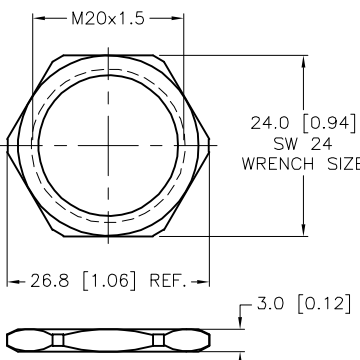



MALE END VIEW		LOCKNUT		SPECIFICATIONS																							
 1 (LONG) 1 = GREEN/YELLOW 2 = BLACK 3 = WHITE 				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>HOUSING MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>O-RING MATERIAL</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>21.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 V</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x14 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, UL 2238, CE</td></tr></table>		CONTACT CARRIER MATERIAL	PVC	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING MATERIAL/PLATING	BRASS/NICKEL	O-RING MATERIAL	NITRILE	RATED CURRENT [A]	21.0 A	RATED VOLTAGE [V]	600 V	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x14 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K	APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE
CONTACT CARRIER MATERIAL	PVC																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
HOUSING MATERIAL/PLATING	BRASS/NICKEL																										
O-RING MATERIAL	NITRILE																										
RATED CURRENT [A]	21.0 A																										
RATED VOLTAGE [V]	600 V																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTORS [AWG]	3x14 AWG																										
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																										
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K																										
APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE																										

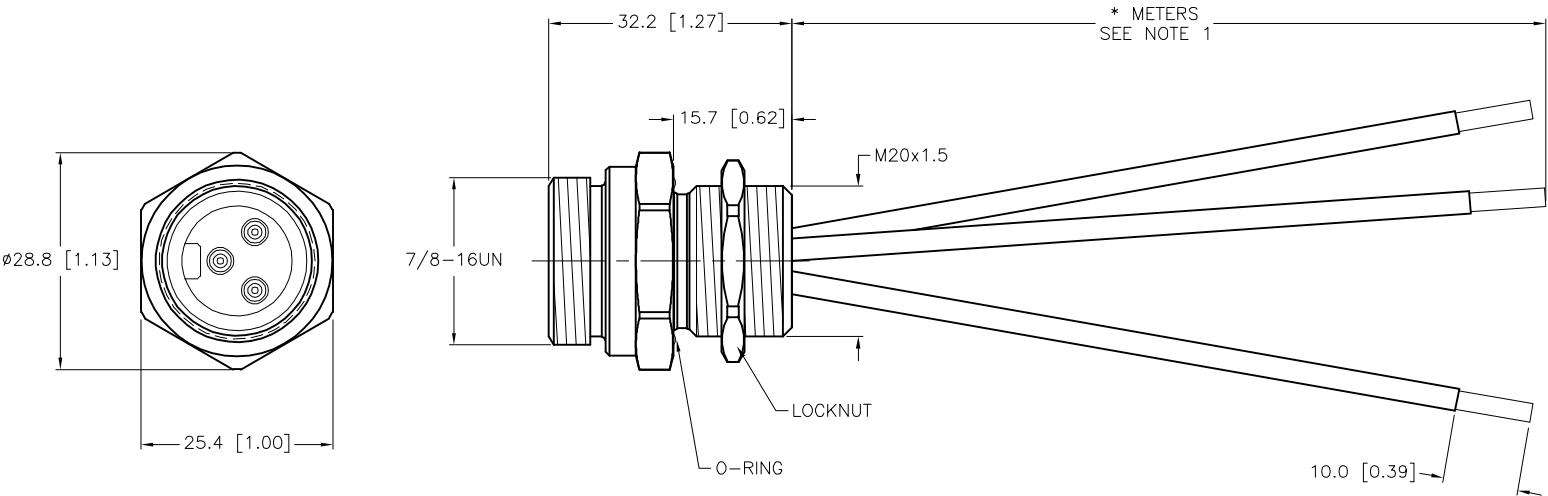

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:				RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				1. 2. 3. 4.				DRFT TV		DATE 05/17/17		DESCRIPTION P-PWR-RSF 34-*M/M20	
2. PANEL CUTOUT RECOMMENDATION: 21MM				MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD L.H.		SCALE 1=1.0		UNIT OF MEASUREMENT MILLIMETER [INCH]	
H UPDATED NOTES				FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV H	
REV DESCRIPTION				BY DATE ECO NO.						FILE: 777039660		SHEET 1 OF 1	