

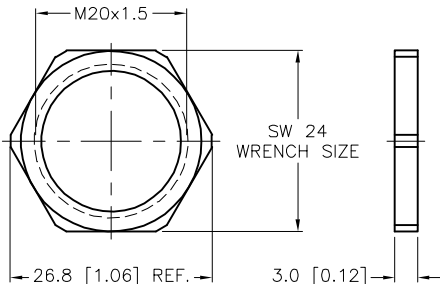


FEMALE END VIEW	LOCKNUT	SPECIFICATIONS																							
 1 = GREEN/YELLOW 2 = BLACK 3 = WHITE 		<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>PVC</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>HOUSING MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>O-RING MATERIAL</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>21.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 V</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x14 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, UL 2238, CE</td></tr></table>	CONTACT CARRIER MATERIAL/COLOR	PVC	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING MATERIAL/PLATING	BRASS/NICKEL	O-RING MATERIAL	NITRILE	RATED CURRENT [A]	21.0 A	RATED VOLTAGE [V]	600 V	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x14 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K	APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE	
CONTACT CARRIER MATERIAL/COLOR	PVC																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
HOUSING MATERIAL/PLATING	BRASS/NICKEL																								
O-RING MATERIAL	NITRILE																								
RATED CURRENT [A]	21.0 A																								
RATED VOLTAGE [V]	600 V																								
CONDUCTOR INSULATION MATERIAL	PVC																								
NUMBER OF CONDUCTORS [AWG]	3x14 AWG																								
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																								
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K																								
APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE																								

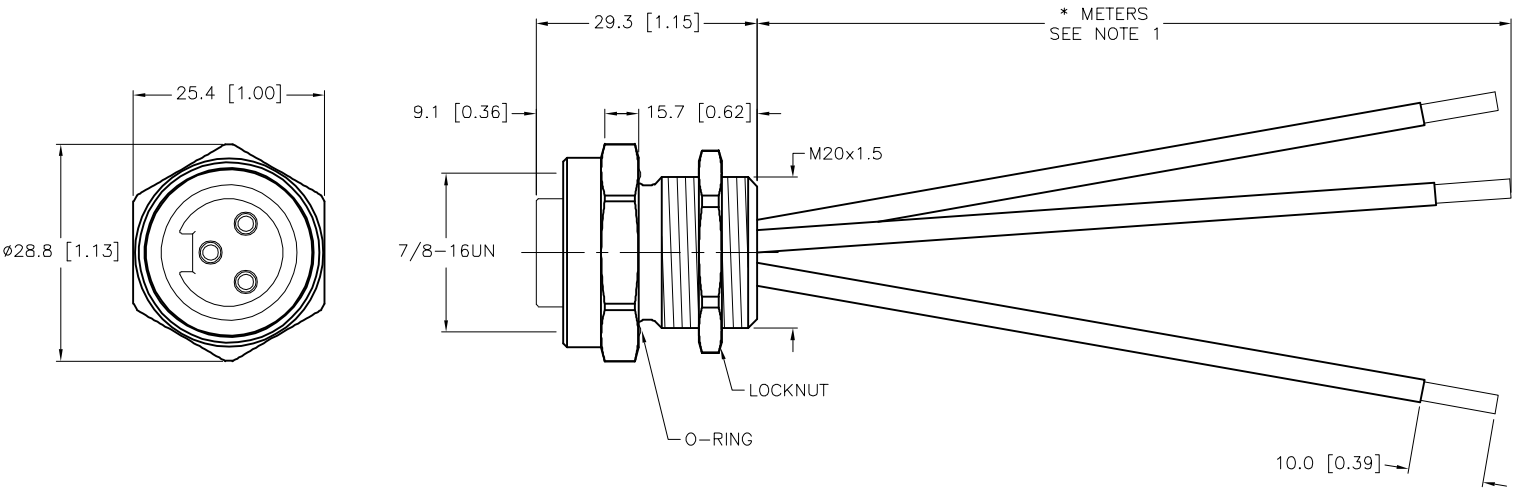

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. PANEL CUTOUT RECOMMENDATION: 21MM

H	UPDATED NOTES	ER	05/21/21	76759
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		DRFT TV	DATE 05/17/17	DESCRIPTION P-PWR-RKF 34-*M/M20	
2.		APVD L.H.	SCALE 1=1.0		
3.		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	
4.	MATERIAL SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		REV H
FINISH SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		FILE: 777039661	SHEET 1 OF 1