

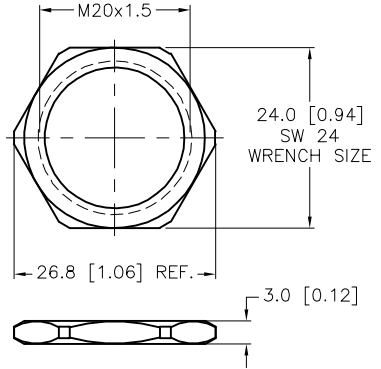


MALE END VIEW	LOCKNUT	SPECIFICATIONS	
 1 = BLACK 2 = WHITE 3 = RED 4 = GREEN/YELLOW 		CONTACT CARRIER MATERIAL/COLOR	PVC
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		HOUSING MATERIAL/PLATING	BRASS/NICKEL
		O-RING MATERIAL	NITRILE
		RATED CURRENT [A]	17.0 A
		RATED VOLTAGE [V]	600 V
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x14 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K
		APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE

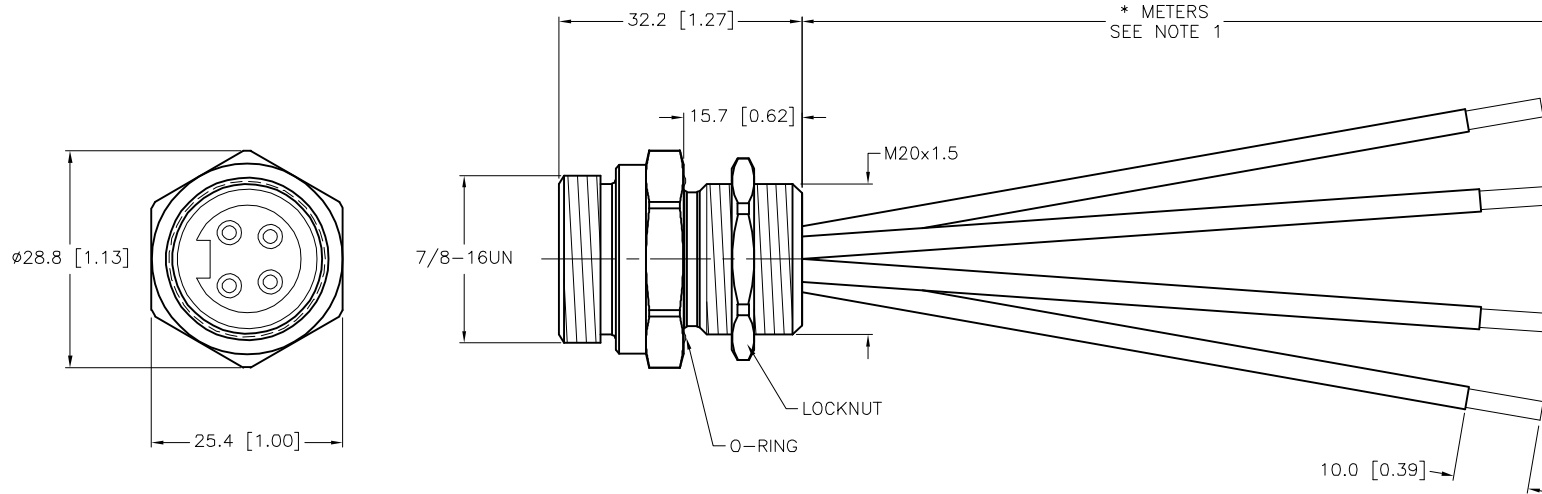


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. PANEL CUTOUT RECOMMENDATION: 21MM

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

8–29mm±1.0mm 30–49mm±2.0mm 50–69mm±3.0mm 70–100mm±4.0mm OVER 100mm±5.0mm *UNLESS OTHERWISE SPECIFIED		RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1–800–544–7769 (763) 553–7300 (763) 553–0708 fax www.turck.us	
TURCK		MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT TV DATE 05/17/17		DESCRIPTION P–PWR–RSF 44–*M/M20	
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		APVD SCALE 1=1.0		IDENTIFICATION NO. REV H	
DO NOT SCALE THIS DRAWING						FILE: 777039662		SHEET 1 OF 1	

NOTES:

1. "∗" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. PANEL CUTOUT RECOMMENDATION: 21MM

H	UPDATED NOTES	ER	05/21/21	76759
REV	DESCRIPTION	BY	DATE	ECO NO.