

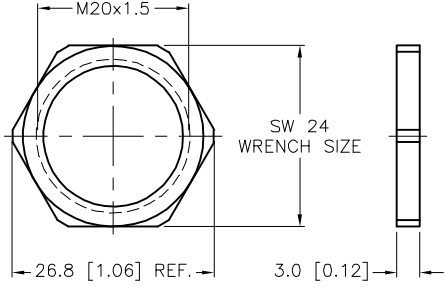


FEMALE END VIEW	LOCKNUT	SPECIFICATIONS	
 1 = BLACK 2 = WHITE 3 = RED 4 = GREEN/YELLOW 		CONTACT CARRIER MATERIAL	PVC
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSAVITED
		O-RING MATERIAL	NITRILE
		RATED CURRENT [A]	17.0 A
		RATED VOLTAGE [V]	600 V
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x14 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K
		APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE

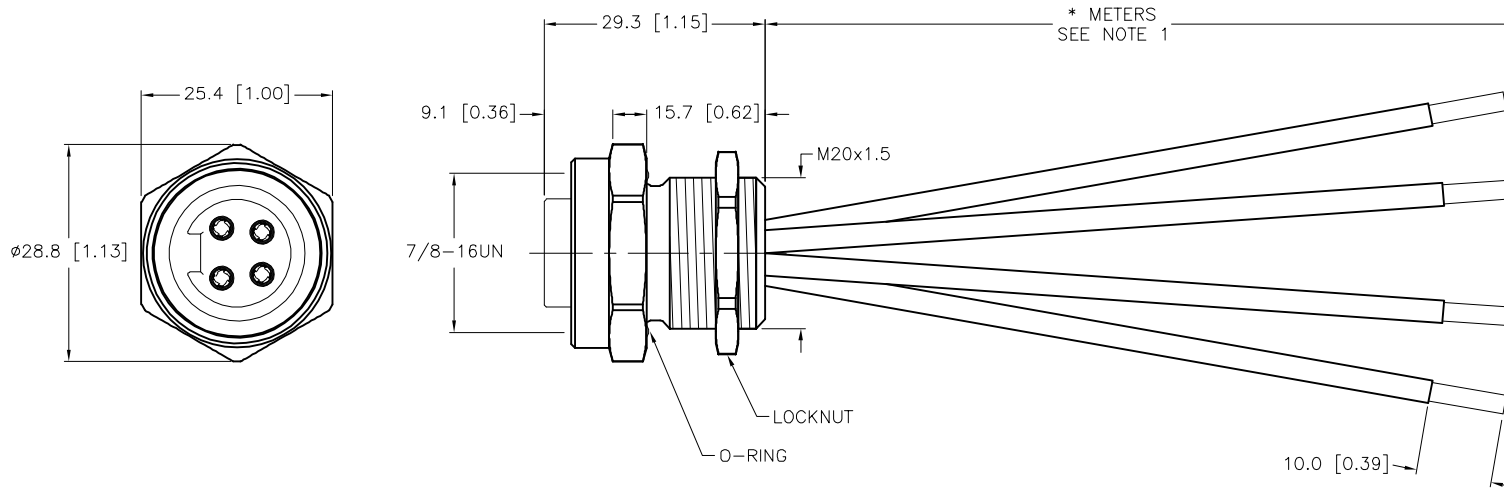

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "M" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. PANEL CUTOUT RECOMMENDATION: 21MM



CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

OVER 100mm		±5.0mm	
*UNLESS OTHERWISE SPECIFIED			

NOTES:

1."*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. PANEL CUTOUT RECOMMENDATION: 21MM

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.									
MATERIAL		DRFT TV						DATE 05/17/17	
SEE SPECIFICATIONS		APVD L.H.						SCALE 1=1.0	
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION P-PWR-RKFV 44-*M/M20			
SEE SPECIFICATIONS						IDENTIFICATION NO.			
I		UPDATED NOTES		ER		05/21/21		76759	
REV		DESCRIPTION		BY		DATE		ECO NO.	

DO NOT SCALE THIS DRAWING

FILE: 777039666

SHEET 1 OF 1