

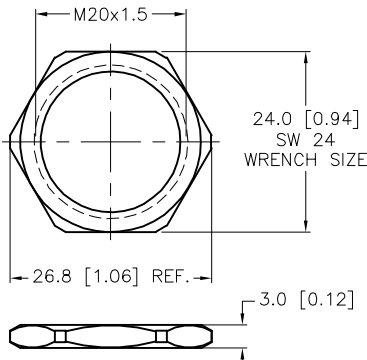


FEMALE END VIEW		LOCKNUT		SPECIFICATIONS																							
 1 = GREEN/YELLOW 2 = BLACK 3 = WHITE 				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSAVITED</td></tr><tr><td>O-RING MATERIAL</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>21.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 V</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x14 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, UL 2238, CE</td></tr></table>		CONTACT CARRIER MATERIAL	PVC	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSAVITED	O-RING MATERIAL	NITRILE	RATED CURRENT [A]	21.0 A	RATED VOLTAGE [V]	600 V	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x14 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K	APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE
CONTACT CARRIER MATERIAL	PVC																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSAVITED																										
O-RING MATERIAL	NITRILE																										
RATED CURRENT [A]	21.0 A																										
RATED VOLTAGE [V]	600 V																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTORS [AWG]	3x14 AWG																										
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																										
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K																										
APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE																										

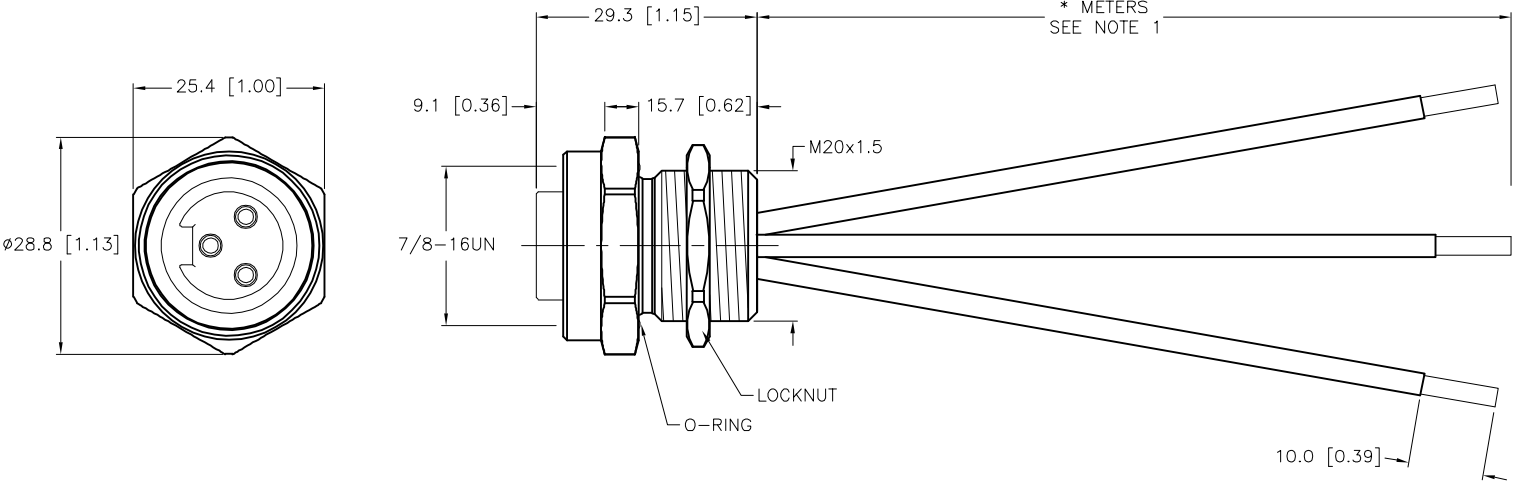


CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. PANEL CUTOUT RECOMMENDATION: 21MM

I	UPDATED NOTES	ER	05/21/21	76759
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
1.		DRFT TV		DATE 05/17/17		DESCRIPTION P-PWR-RKFV 34-*M/M20		
2.		APVD L.H.		SCALE 1=1.0				
3.		UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.		REV 	
4.		CONTACT TURCK FOR MORE INFORMATION			DO NOT SCALE THIS DRAWING		FILE: 777039667	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY						
SEE SPECIFICATIONS								
FINISH		CONTACT TURCK FOR MORE INFORMATION						
SEE SPECIFICATIONS								