

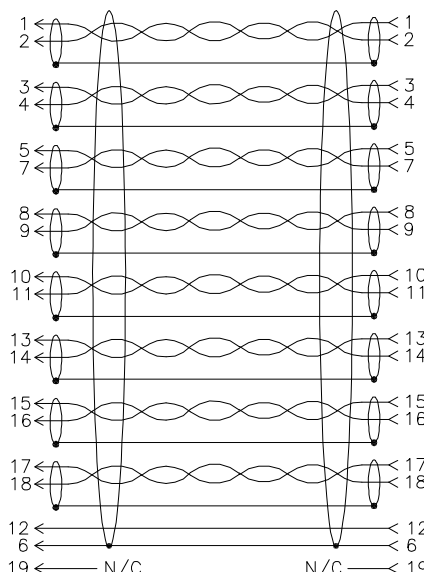
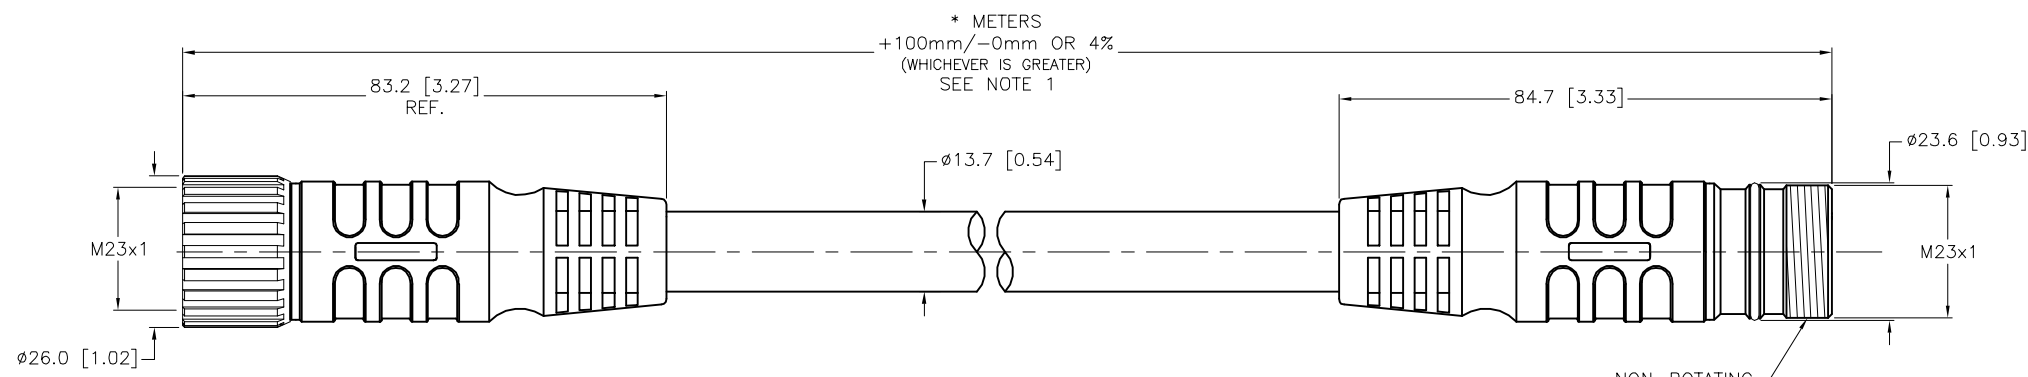



MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON or PBT
 M23 connector		 M23 connector		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
PAIR — 1 = WHITE/BLACK PAIR — 2 = BLACK/WHITE PAIR — 3 = WHITE/GREEN PAIR — 4 = GREEN/WHITE PAIR — 5 = WHITE/RED PAIR — 6 = DRAIN PAIR — 7 = RED/WHITE PAIR — 8 = WHITE/ORANGE PAIR — 9 = ORANGE/WHITE		PAIR — 10 = WHITE/BLUE PAIR — 11 = BLUE/WHITE PAIR — 12 = GREEN/YELLOW PAIR — 13 = WHITE/BROWN PAIR — 14 = BROWN/WHITE PAIR — 15 = WHITE/YELLOW PAIR — 16 = YELLOW/WHITE PAIR — 17 = WHITE/VIOLET PAIR — 18 = VIOLET/WHITE PAIR — 19 = N/C		CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	9.0 A (PIN 12), 2.0 A (ALL OTHERS)
				RATED VOLTAGE [V]	150 V
				OUTER JACKET MATERIAL/COLOR	EX60/BLUE
				CONDUCTOR INSULATION MATERIAL	XLPE
				NUMBER OF CONDUCTORS [AWG]	16x22 AWG, 1x18 AWG GROUND
				DRAIN/SHIELD	9x22 AWG/ALUM.-POLYESTER FOIL (PAIRS & OVERALL)
				CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIRS W/DRAIN, 1 GND, 1 DRAIN
				TEMPERATURE RANGE	-60°C to +105°C (-76°F to +221°F)
				PROTECTION CLASS	IEC IP67
				CABLE RATINGS	UL: ITC-ER/PLTC-ER, DIRECT BURIAL, 105C, -60C COLD BEND CSA: CIC, 90C, 300V

					SOURCE DRAWING - FOR REFERENCE ONLY	
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.		RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
MATERIAL SEE SPECIFICATIONS		FINISH SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT NF APVD F.M.	DATE 06/05/17 SCALE 1=1.3
				CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]	
					DO NOT SCALE THIS DRAWING	
					DESCRIPTION P-CSMV CXMV 19-2168XL-*	
					IDENTIFICATION NO.	
					REV C	
					FILE: 777039752	
					SHEET 1 OF 1	