



MALE END VIEW




1 = WHITE
2 = BLACK

FEMALE END VIEW




1 = WHITE
2 = N/C
3 = BLACK
4 = N/C




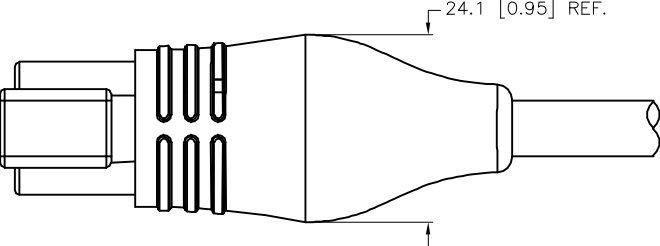


P1

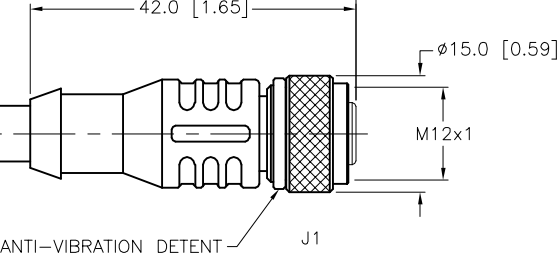

ANTI-VIBRATION DETENT
J1

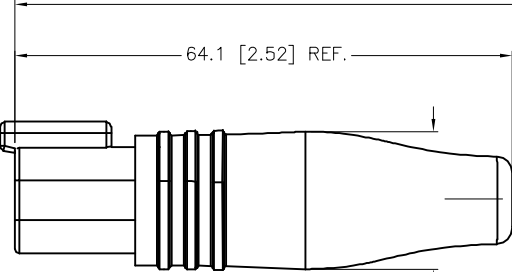

P1

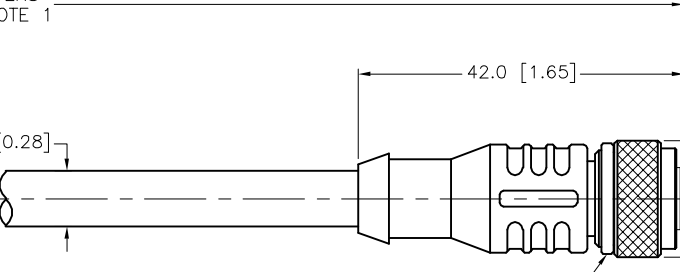

J1

* METERS
SEE NOTE 1

64.1 [2.52] REF.

24.1 [0.95] REF.

17.7 [0.70] REF.

42.0 [1.65]

15.0 [0.59]

7.2 [0.28]

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:


1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S1055" DESIGNATES RED MOLDED CONNECTOR BODY.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT TV
APVD P.G.

DATE 06/29/17
SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

TURCK

DESCRIPTION
DT04-2P-2125-*--RKC 4.22T/S1055

IDENTIFICATION NO.

REV
C

FILE: 777040170
SHEET 1 OF 1

DEUTSCH CONNECTOR

DEUTSCH WEDGELOCK

DEUTSCH TERMINALS

MOLDED HEAD MATERIAL/COLOR

CONTACT CARRIER MATERIAL

CONTACT MATERIAL/PLATING

COUPLING NUT MATERIAL/PLATING

OPERATING VOLTAGE [V]

OUTER JACKET MATERIAL/COLOR

CONDUCTOR INSULATION MATERIAL

NUMBER OF CONDUCTORS [AWG]

CABLE APPROVALS

TEMPERATURE RANGE

PROTECTION CLASS

DT04-2P (P1)

W2P (P1)

0460-202-16141 (P1)

TPU/RED

TPU or NYLON (J1)

BRASS/GOLD (J1)

BRASS/NICKEL (J1)

250 V

TPE/BLACK

PVC

2x18 AWG

(UL) TC DIRECT BURIAL 90C DRY/WET 600V
SUNLIGHT RESISTANT OIL RES II -40C OR
WTTTC 90C DRY/WET 1000V OR AWM 105C
600V OR CSA CIC/TC PVC/N 90C DRY 75C
WET 600V FT1 FT4 SUNLIGHT RESISTANT -40C

-40°C to +105°C (-40°F to +221°F)

IP67