

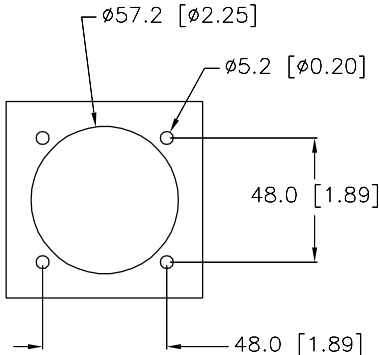



FEMALE END VIEW	ENTRY HOLE PATTERN	SPECIFICATIONS	
		HOUSING MATERIAL/COLOR	PBT/BLUE
1 = BLACK 2 = RED 3 = WHITE ⬇ = GREEN/YELLOW		CONTACT MATERIAL/PLATING	NICKEL/SILVER
		RATED CURRENT [A]	30.0 A
		RATED VOLTAGE, MAXIMUM VOLTAGE [VAC]	480 VAC/600 VAC
		CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
		CABLE JACKET MATERIAL/COLOR	TPE/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC/NYLON
		NUMBERS OF CONDUCTORS [AWG]	4x8 AWG
		TEMPERATURE RATING	-40°C to +60°C (-40°F to +140°F)
		PROTECTION CLASS	IEC IP66, IP67

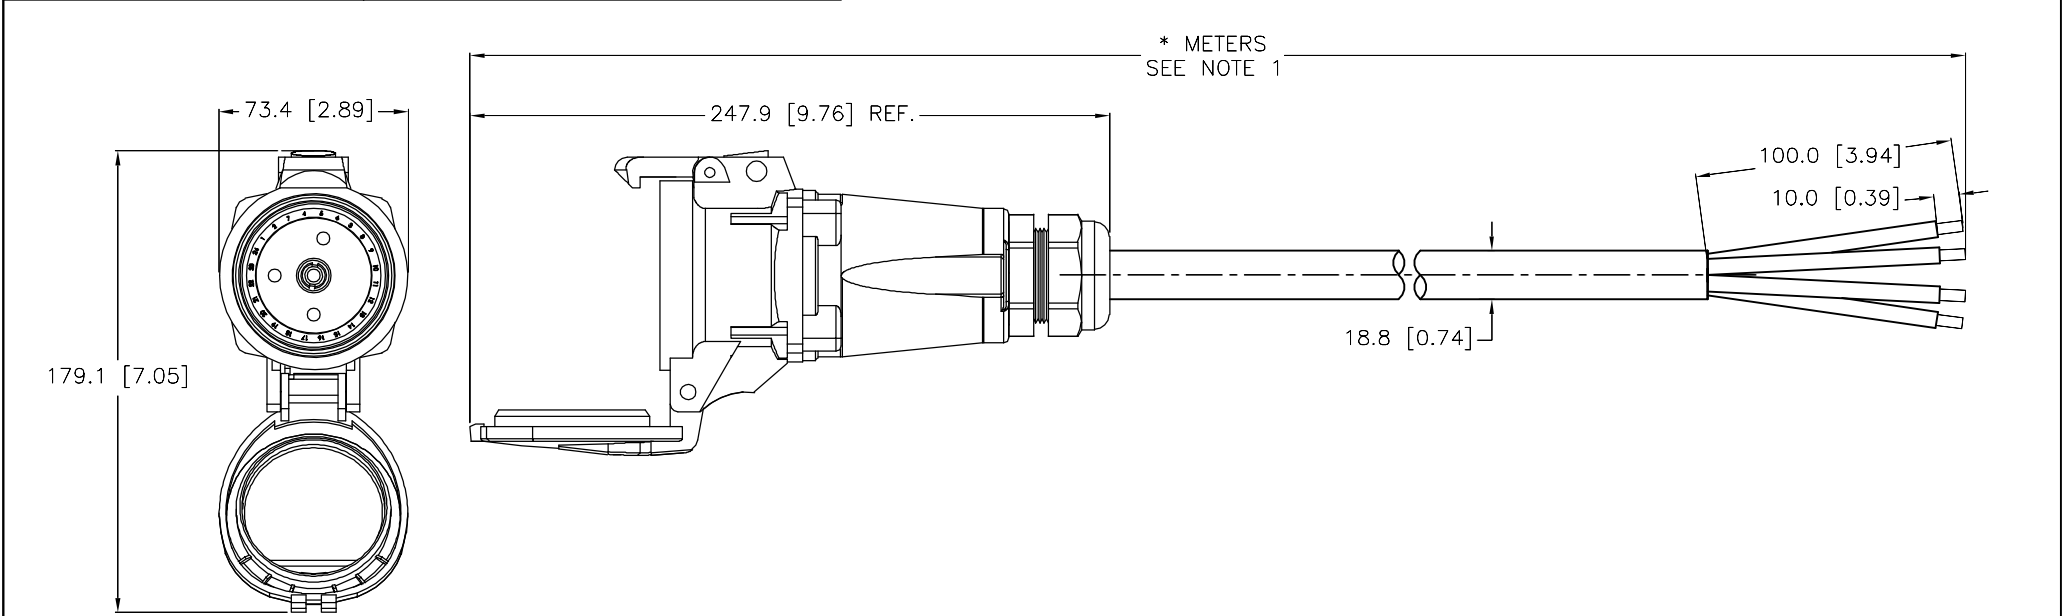

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

					WHICHEVER IS GREATER	
STRIP LENGTH		TOLERANCE*				
0-7mm		±0.5mm				
8-29mm		±1.0mm				
30-49mm		±2.0mm				
50-69mm		±3.0mm				
70-100mm		±4.0mm				
OVER 100mm		±5.0mm				
					*UNLESS OTHERWISE SPECIFIED	

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
1. 2. 3. 4.														
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT TV		DATE 08/21/17		DESCRIPTION			
SEE SPECIFICATIONS							APVD		SCALE 1=3.0		LPK-3A-408-* /P			
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS											B			
B	UPDATE CONDUCTOR COLOR				NF	01/25/18	61098							
REV	DESCRIPTION				BY	DATE	ECO NO.				FILE: 777040178		SHEET 1 OF 1	