



FEMALE END VIEW



- 1 = BLACK
2 = RED
3 = WHITE
⊕ = GREEN

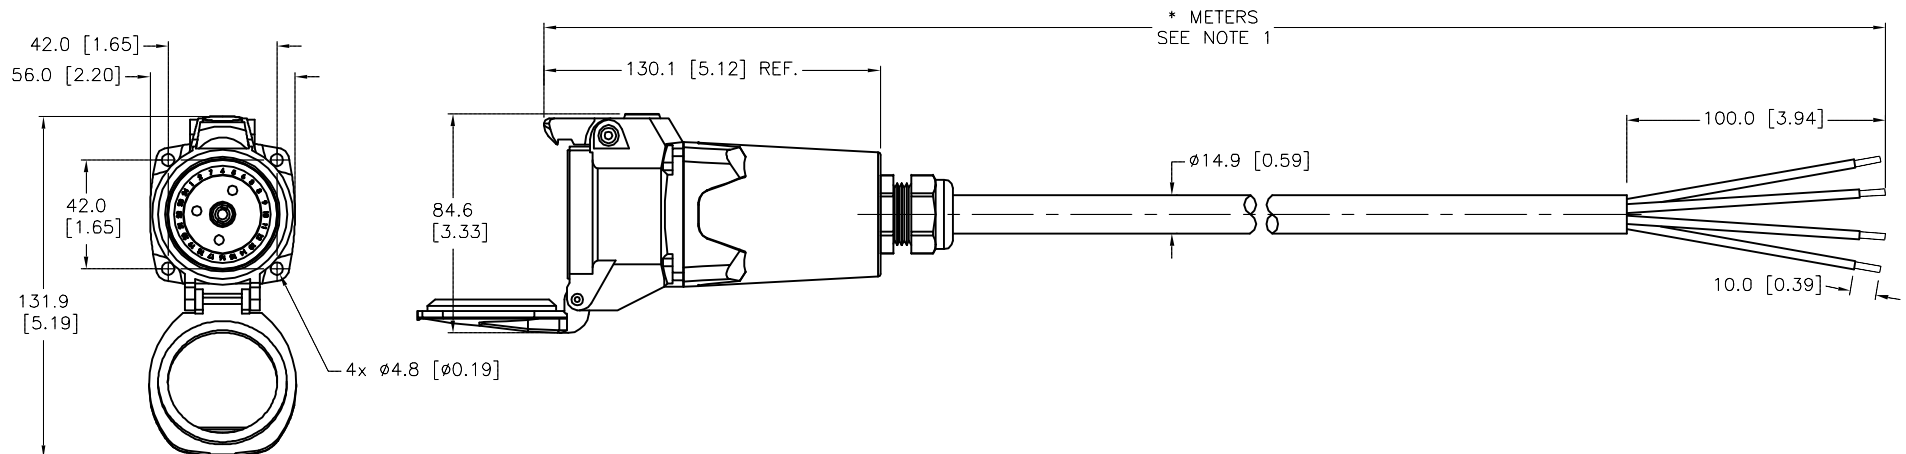

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:


1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. TC-ER CABLE.

SPECIFICATIONS

HOUSING MATERIAL/COLOR	PBT/BLUE
CONTACT MATERIAL/PLATING	NICKEL/SILVER
CABLE GLAND MATERIAL	NYLON/BUNA-N (CABLE GRIP)
RATED CURRENT [A]	30 A
RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC
CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	4x10 AWG
TEMPERATURE RATING	-40°C to +60°C (-40°F to +140°F)
PROTECTION CLASS	IEC IP66, IP67

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
						
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	08/21/17	DESCRIPTION LPK-3A-40-*/P
FINISH SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=3.0	
		UNIT OF MEASUREMENT MILLIMETER [INCH]				
		DO NOT SCALE THIS DRAWING				
	CONTACT TURCK FOR MORE INFORMATION	IDENTIFICATION NO.				REV A
		FILE: 777040179				SHEET 1 OF 1

A	DRAWING RELEASE	RDS	08/29/17	
REV	DESCRIPTION	BY	DATE	ECO NO.