



FEMALE END VIEW




1 = BROWN	14 = WHITE
2 = WHITE/GRAY	15 = BLUE
3 = BLUE/GRAY	16 = BLACK/GRAY
4 = BROWN/GRAY	17 = BROWN/ORANGE
5 = BLACK/YELLOW	18 = WHITE/ORANGE
6 = WHITE/YELLOW	19 = BLACK/ORANGE
7 = BLUE/YELLOW	20 = BLACK/GREEN
8 = BROWN/YELLOW	21 = WHITE/GREEN
9 = BLACK/RED	22 = BLUE/GREEN
10 = WHITE/RED	23 = BROWN/GREEN
11 = BLUE/RED	24 = BLUE/ORANGE
12 = BROWN/RED	25 = GREEN/YELLOW
13 = BLACK	26 = GRAY

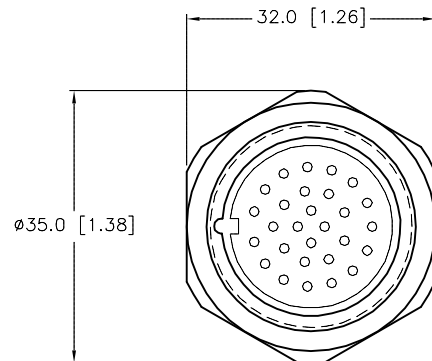

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
RECEPTACLE HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	26x22 AWG
TEMPERATURE	-30°C TO +80°C (-22°F TO +176°F)
PROTECTION CLASS	IEC IP67
MOUNTING	Ø28.5 [1.122] HOLE or PG 21 THRD.

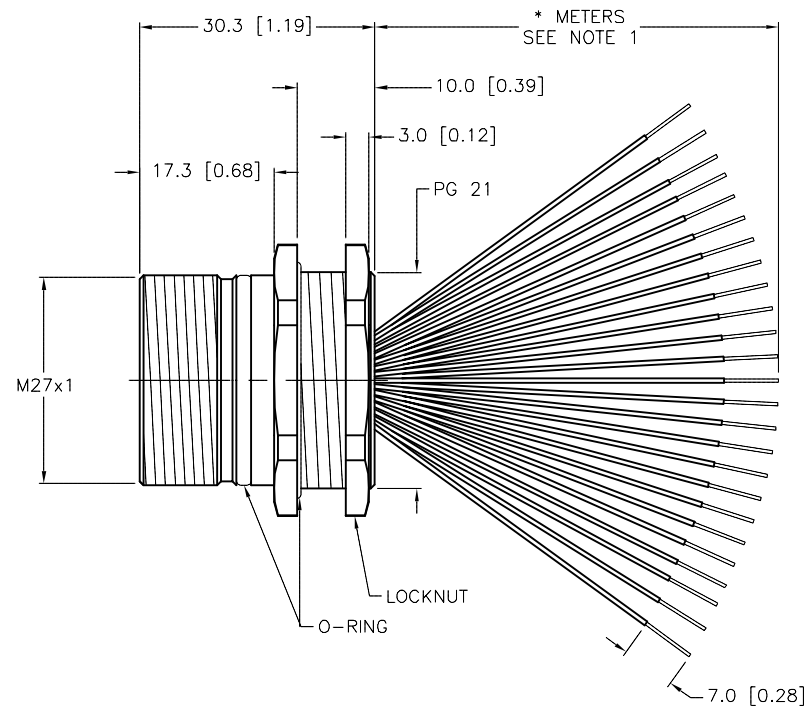

SOURCE DRAWING - FOR REFERENCE ONLY

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1."*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	DRFT NF APVD L.H.	DATE 08/22/17 SCALE 1=1.0	DESCRIPTION DKF 26-26-*	
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	REV B
		DO NOT SCALE THIS DRAWING		FILE: 777040187	SHEET 1 OF 1

B	UPDATE KEYWAY ORIENTATION	RDS	04/01/20	75776
REV	DESCRIPTION	BY	DATE	ECO. NO.