
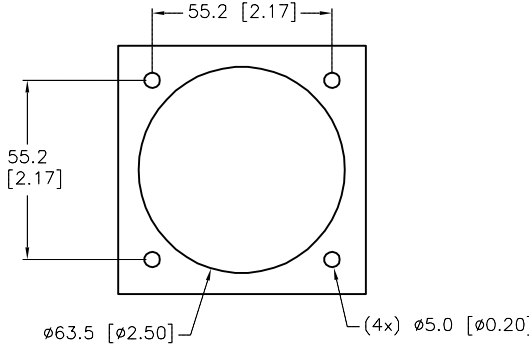



FEMALE END VIEW	ENTRY HOLE PATTERN	SPECIFICATIONS	
		CONTACT MATERIAL/PLATING	NICKEL/SILVER
1 = BLACK 2 = RED 3 = WHITE ⊕ = GREEN	A = BLACK B = WHITE C = BROWN D = BLUE	HOUSING MATERIAL/COLOR	PBT/BLUE
		RATED CURRENT [A]	40 A (8 AWG), 0.5 A (14 AWG)
		RATED VOLTAGE/MAX. VOLTAGE [VAC]	480 VAC/600 VAC
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBERS OF CONDUCTORS [AWG]	4x8 AWG, 4x18 AWG
		TEMPERATURE RATING	-40°C to +60°C (-40°F to +140°F)
		PROTECTION CLASS	IEC IP66, IP67

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES WIRE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS				FINISH SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT TV APVD L.H.	DATE 08/25/17 SCALE 1=2.4	DESCRIPTION LPKF-6A-408A48-*/P	
A DRAWING RELEASE				TV 09/01/17		UNIT OF MEASUREMENT MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	REV A
REV DESCRIPTION				BY DATE ECO NO.		FILE: 777040221		SHEET 1 OF 1			