




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
					
CONNECTOR TYPE/STYLE - GT06F SHELL SIZE - 24 INSERT ARRANGEMENT - 28S		CONNECTOR TYPE/STYLE - GT06F SHELL SIZE - 24 INSERT ARRANGEMENT - 28P			
A = DRAIN B = WHITE/GRAY C = BROWN D = BLUE E = BLACK/YELLOW F = WHITE/ORANGE G = BLACK/GRAY H = BROWN/ORANGE J = WHITE K = WHITE/YELLOW L = BLACK/ORANGE M = BLUE/ORANGE N = BROWN/GREEN P = BLACK Q = BROWN/RED R = BLUE/YELLOW S = BLACK/GREEN T = GREEN/YELLOW U = BLUE/GREEN V = BLUE/RED W = BROWN/YELLOW X = BLACK/RED Y = WHITE/GREEN Z = WHITE/RED		A = DRAIN B = WHITE/GRAY C = BROWN D = BLUE E = BLACK/YELLOW F = WHITE/ORANGE G = BLACK/GRAY H = BROWN/ORANGE J = WHITE K = WHITE/YELLOW L = BLACK/ORANGE M = BLUE/ORANGE N = BROWN/GREEN P = BLACK Q = BROWN/RED R = BLUE/YELLOW S = BLACK/GREEN T = GREEN/YELLOW U = BLUE/GREEN V = BLUE/RED W = BROWN/YELLOW X = BLACK/RED Y = WHITE/GREEN Z = WHITE/RED		CONTACT CARRIER MATERIAL NEOPRENE MOLDED HEAD MATERIAL/COLOR PVC/BLACK CONTACT MATERIAL/PLATING COPPER ALLOY/SILVER COUPLING NUT MATERIAL/PLATING ALUMINUM ALLOY/OLIVE DRAB CHROMATE MOLD SLEEVE ALUMINUM/BLACK ANODIZED RATED CURRENT [A] 3.0 A RATED VOLTAGE [V] 300 V OUTER JACKET MATERIAL/COLOR PVC/YELLOW CONDUCTOR INSULATION MATERIAL PVC NUMBER OF CONDUCTORS 25x22 AWG DRAIN/SHIELD 22 AWG/ALUM.-POLYESTER FOIL TEMPERATURE RATING -40°C to +105°C (-40°F to +221°F) PROTECTION CLASS MEETS NEMA 1,3,4,6P & IEC IP67,IP68 CONNECTOR TYPE MIL-DTL-5015	

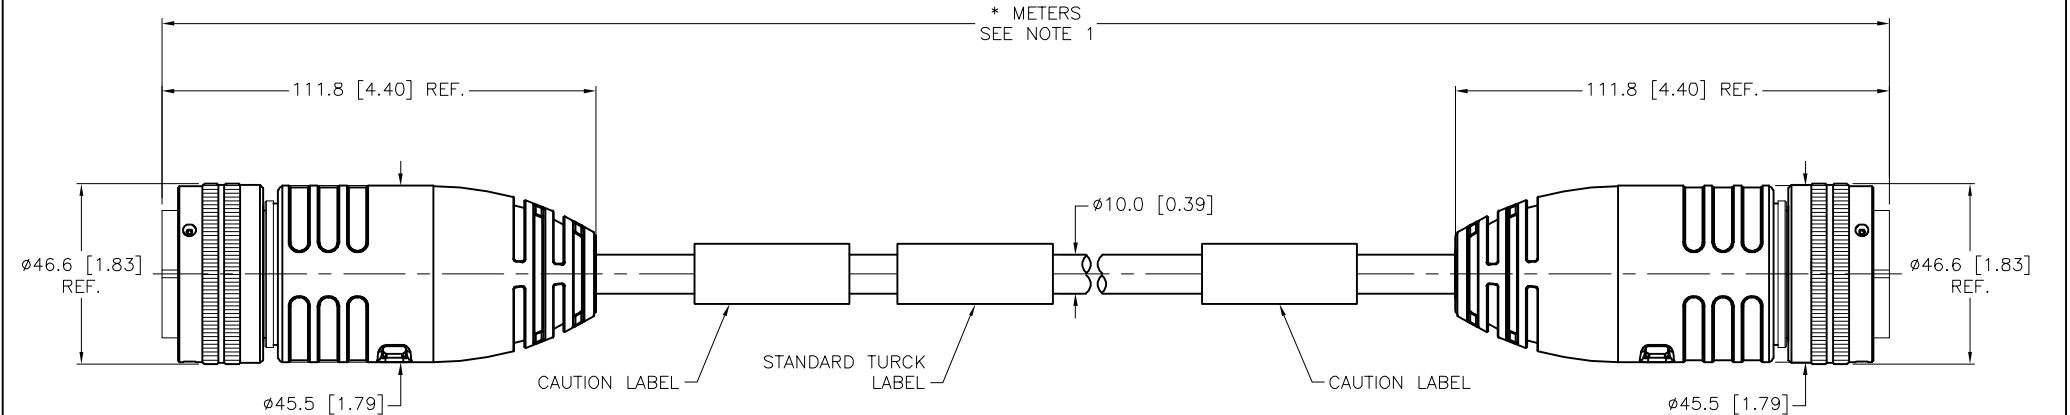

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:				RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.				1. 2. 3. 4.				DRFT RDS		DATE 02/24/15	
2. UNUSED CONDUCTORS TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.				MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD A.M.		SCALE 1=2.0	
				FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
				SEE SPECIFICATIONS				MILLIMETER [INCH]		GT06M-24-28S-0631-*-24-28P	
				SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
										REV	
										B	
										FILE: 777040266	
										SHEET 1 OF 1	