




MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS																											
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = DRAIN 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/COLOR (P1)</td><td>NYLON or POM/BLACK</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING (J1)</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>125 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>XLPE</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>24 AWG/ALUM.-POLYESTER FOIL</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P AND IEC IP68</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/COLOR (P1)	NYLON or POM/BLACK	COUPLING NUT MATERIAL/PLATING (J1)	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	125 V	OUTER JACKET MATERIAL/COLOR	TPU/BLACK	CONDUCTOR INSULATION MATERIAL	XLPE	NUMBER OF CONDUCTORS [AWG]	4x22 AWG	DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL	TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68	
CONTACT CARRIER MATERIAL	NYLON OR TPU																												
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																												
CONTACT MATERIAL/PLATING	BRASS/GOLD																												
COUPLING NUT MATERIAL/COLOR (P1)	NYLON or POM/BLACK																												
COUPLING NUT MATERIAL/PLATING (J1)	BRASS/NICKEL																												
RATED CURRENT [A]	4.0 A																												
RATED VOLTAGE [V]	125 V																												
OUTER JACKET MATERIAL/COLOR	TPU/BLACK																												
CONDUCTOR INSULATION MATERIAL	XLPE																												
NUMBER OF CONDUCTORS [AWG]	4x22 AWG																												
DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL																												
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)																												
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68																												

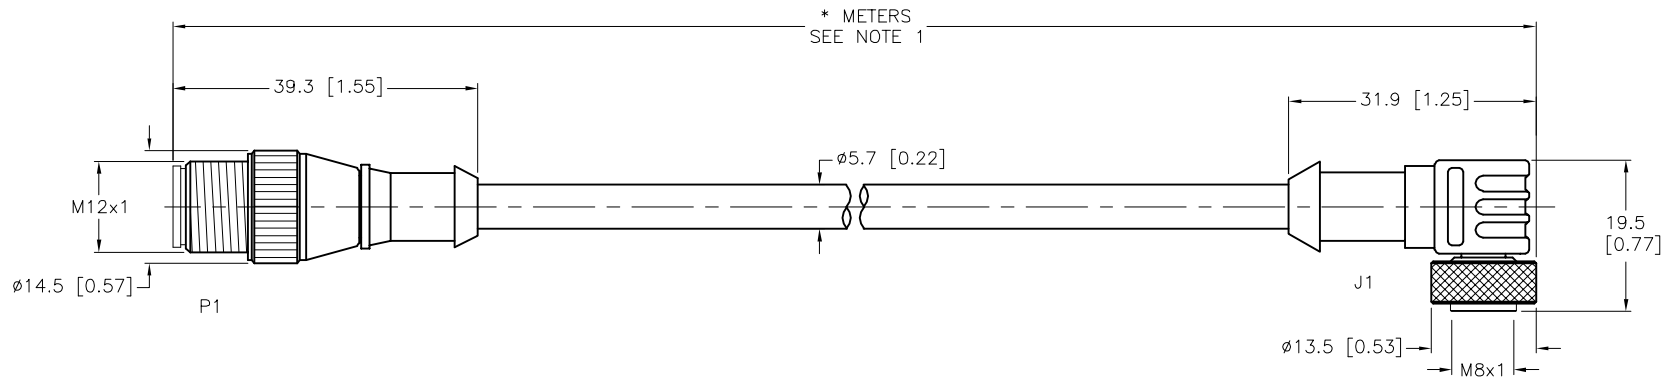


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.
2. "/S618" DESIGNATES ALUMINUM POLYESTER SHIELD AND DRAIN WIRE. DRAIN IS NOT CONNECTED AT THE PICO PLUG.
3. "/S760" DESIGNATES BLACK CABLE JACKET.
4. "/S771" DESIGNATES BLACK MOLDED PLUG BODY MATERIAL.
5. "/S849" DESIGNATES 22 AWG CONDUCTORS.

SOURCE DRAWING - FOR REFERENCE ONLY

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.					RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
2. "/S618" DESIGNATES ALUMINUM POLYESTER SHIELD AND DRAIN WIRE. DRAIN IS NOT CONNECTED AT THE PICO PLUG.								TURCK		
3. "/S760" DESIGNATES BLACK CABLE JACKET.								DRFT NF DATE 10/06/17		
4. "/S771" DESIGNATES BLACK MOLDED PLUG BODY MATERIAL.								APVD M.V. SCALE 1=1.0		
5. "/S849" DESIGNATES 22 AWG CONDUCTORS.								UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		
MATERIAL SEE SPECIFICATIONS					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DESCRIPTION WASKW4.5T-*--PKWC4M/S618/S760/S771/S849				
FINISH SEE SPECIFICATIONS						IDENTIFICATION NO.		REV A		
A DRAWING RELEASE NF 10/13/17						FILE: 777040553		SHEET 1 OF 1		
REV DESCRIPTION BY DATE ECO NO.										