






FEMALE END VIEW	MALE END VIEW	TYP. PANEL CUTOUT	SPECIFICATIONS																									
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR (P1)</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>HOUSING MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>125 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x26 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C TO +90°C (-40°F TO +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR (P1)	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING MATERIAL/PLATING	BRASS/NICKEL	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	125 VAC/VDC	OUTER JACKET MATERIAL/COLOR	TPU/BLACK	CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	4x26 AWG	TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU																											
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/YELLOW																											
CONTACT MATERIAL/PLATING	BRASS/GOLD																											
HOUSING MATERIAL/PLATING	BRASS/NICKEL																											
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																											
RATED CURRENT [A]	2.0 A																											
RATED VOLTAGE [V]	125 VAC/VDC																											
OUTER JACKET MATERIAL/COLOR	TPU/BLACK																											
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER																											
NUMBER OF CONDUCTORS [AWG]	4x26 AWG																											
TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																											

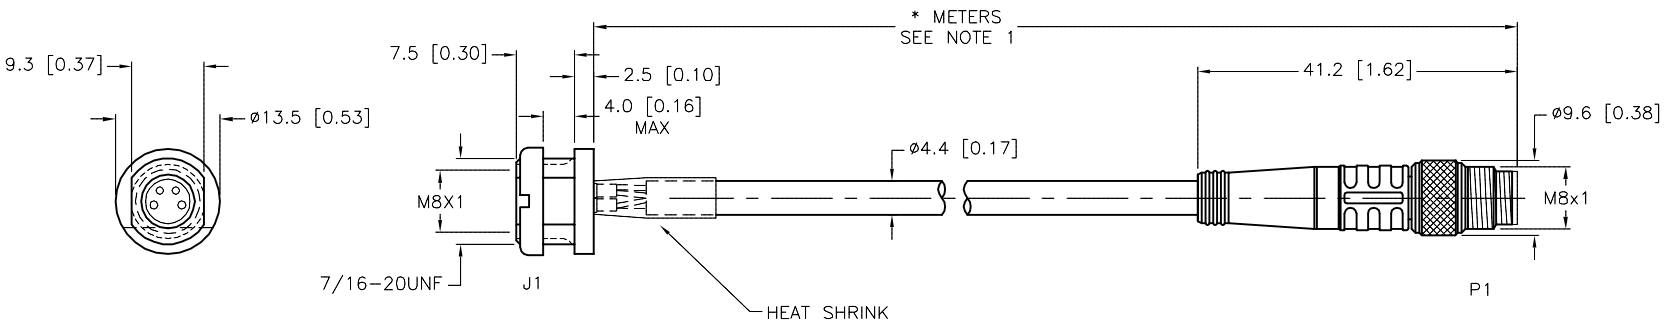

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

- NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.
3. "/S101" DESIGNATES FLEXLIFE-20 AND CTRACK CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.	2.	3.	4.				DRFT	RDS	DATE	10/16/17
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD	L.H.	SCALE	1=1.0
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT			DESCRIPTION
SEE SPECIFICATIONS					SEE SPECIFICATIONS		MILLIMETER [INCH]			MFKS 4F-*--PSG 4M/S90/S101
							DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.
										REV
										B
B	ADD PANEL CUTOUT	RDS	02/24/20	75679						FILE: 777040590
REV	DESCRIPTION	BY	DATE	ECO NO.						SHEET 1 OF 1