

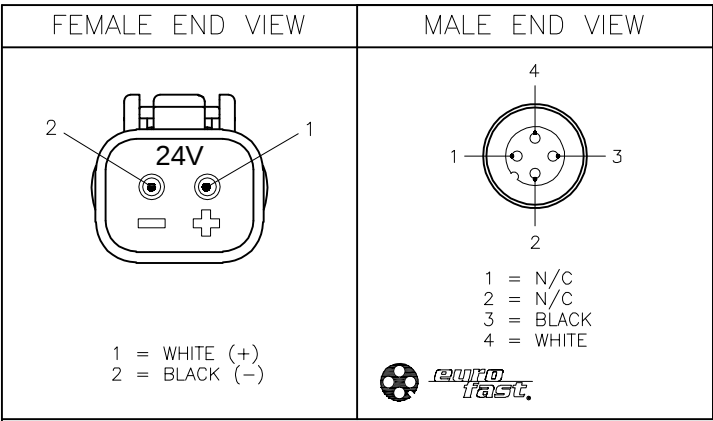


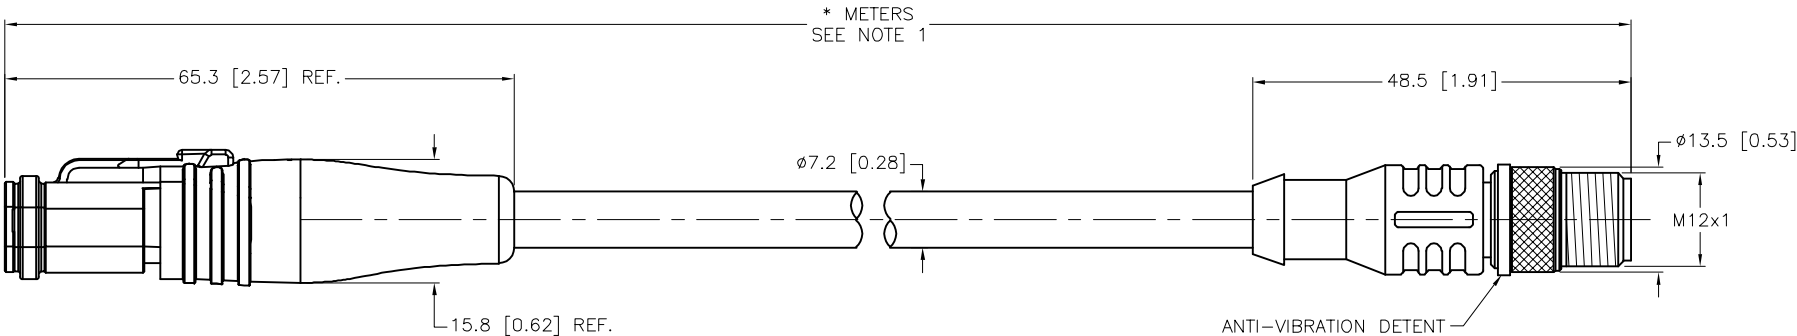

SPECIFICATIONS	
DEUTSCH CONNECTOR	DT06-2S-SDT-CE28
DEUTSCH WEDGELOCK	W2S-SDT-24V
DEUTSCH TERMINALS	0462-201-16141
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
RATED CURRENT (A)	4.0 A
OPERATING VOLTAGE	24 VDC
NUMBER OF CONDUCTORS [AWG]	2x18 AWG
CABLE APPROVALS	C(UL) CIC UL# PVC 90C DRY 75C WET 300V FT1 FT4 SUNLIGHT RESISTANT OR AWM 105C 600V OR CSA AWM CSA# 1/11 A/B 105C 600V FT4 OIL RESISTANT CE
CONTACT CARRIER MATERIAL	TPU or NYLON
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	IP67

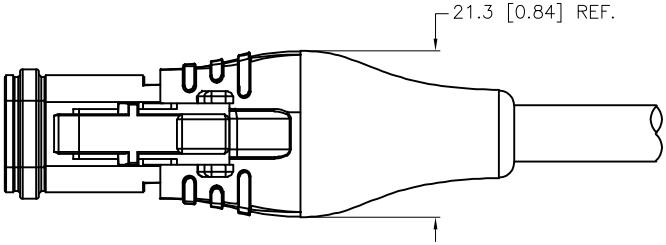


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	10/13/17	DESCRIPTION	
SEE SPECIFICATIONS		APVD	C.K.	SCALE	1 = 1.0	DT06-2S-2125-*--RSC 4.28T/LED24V	
		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
		MILLIMETER [INCH]				REV	
FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING				D	
SEE SPECIFICATIONS		FILE: 777040597				SHEET 1 OF 1	

D	UPDATE CABLE APPROVALS	NF	10/08/24	80735
REV	DESCRIPTION	BY	DATE	ECO NO.