



MALE END VIEW





(P1)


FEMALE END VIEW





(J1,J2)


WIRING DIAGRAM

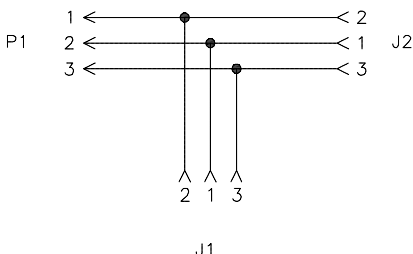

J1

SPECIFICATIONS

CONTACT CARRIER MATERIAL	PVC
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED (P1)
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (J1,J2)
RATED CURRENT [A]	40 A COMBINED, 21 A DROP
RATED VOLTAGE [V]	600 V
CABLE JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON
NUMBERS OF CONDUCTORS [AWG]	3x14 AWG
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

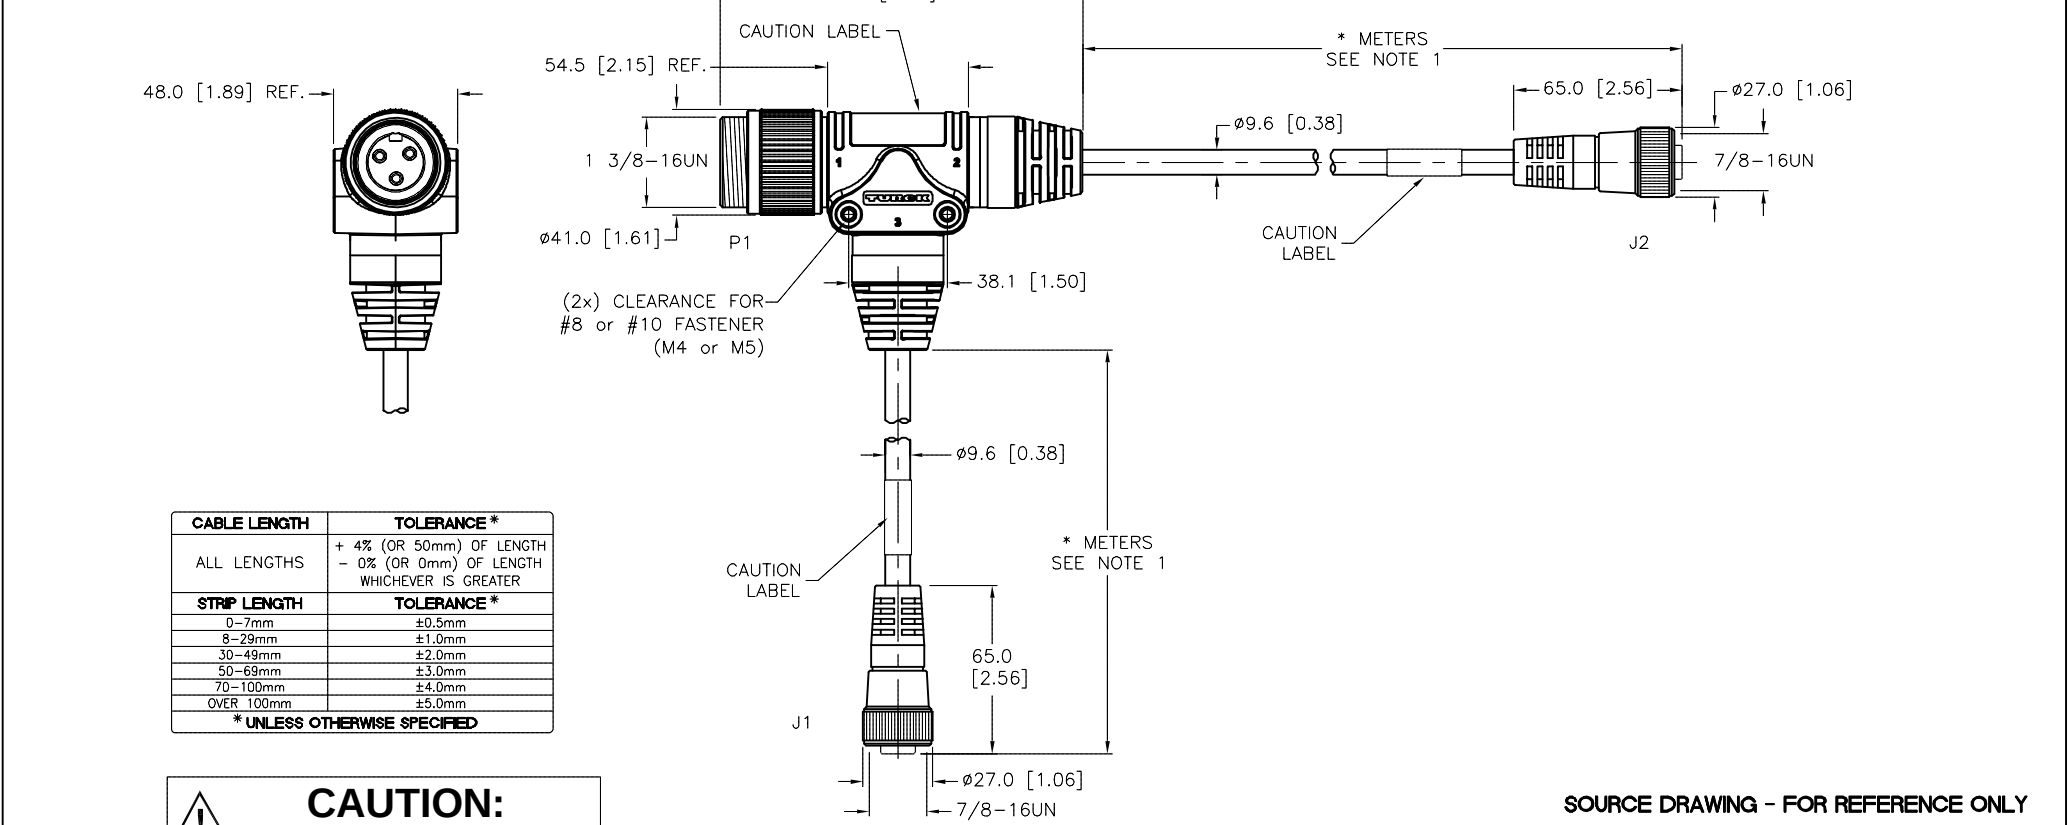

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S3455" DESIGNATES SPECIAL TEE WIRING FROM D SIZE POWERFAST MALE TO A SIZE MINI FEMALE CONNECTORS.
3. "/S4000" DESIGNATES TC-ER CABLE.

B	UPDATED CURRENT RATING	ER	04/26/19	69364
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS


1.

2.

3.

4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT NF

DATE 11/01/17

APVD K.Y.

SCALE 1=3.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DESCRIPTION

GSDA/2RKM 34-*/*/S3455/S4000

IDENTIFICATION NO.

REV

B

FILE: 777040670

SHEET 1 OF 1