



FEMALE END VIEW



- 1 = RED
2 = N/C
3 = BLACK
⊕ = N/C

SPECIFICATIONS

OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBER OF CONDUCTORS [AWG]	4x14 AWG
TEMPERATURE RANGE	-25°C to +80°C (-13°F to +176°F)

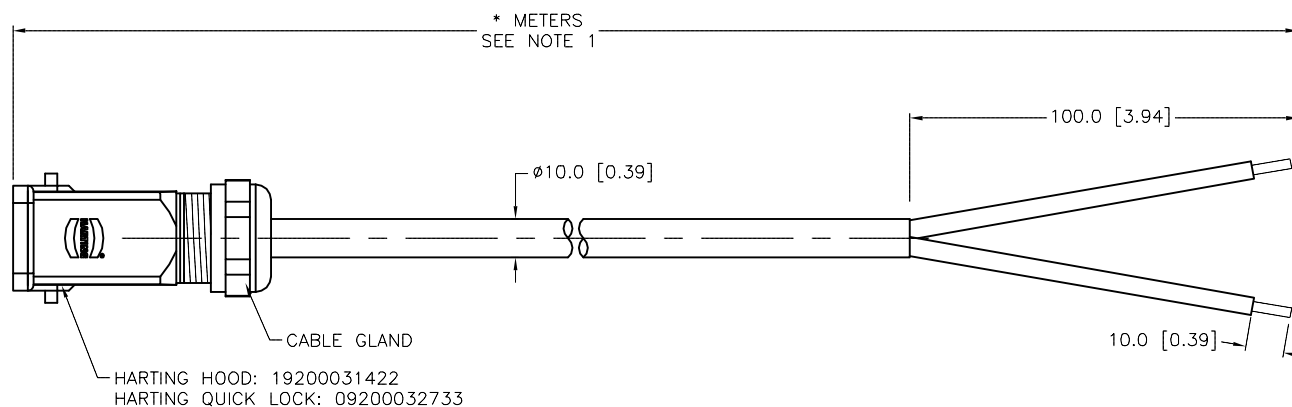


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S3474" DESIGNATES CUSTOM WIRING. UNUSED CONDUCTORS TRIMMED FLUSH WITH CABLE JACKET; BOTH ENDS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.							
MATERIAL		DRFT NF		DATE 02/01/18		DESCRIPTION HAN3A/4F-1750-*M/S3474	
FINISH		APVD E.S.		SCALE 1=2.0			
		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.	
		DO NOT SCALE THIS DRAWING				REV A	
		CONTACT TURCK FOR MORE INFORMATION				FILE: 777041021	
						SHEET 1 OF 1	

A	DRAWING RELEASE	NF	02/07/18	
REV	DESCRIPTION	BY	DATE	ECO NO.