


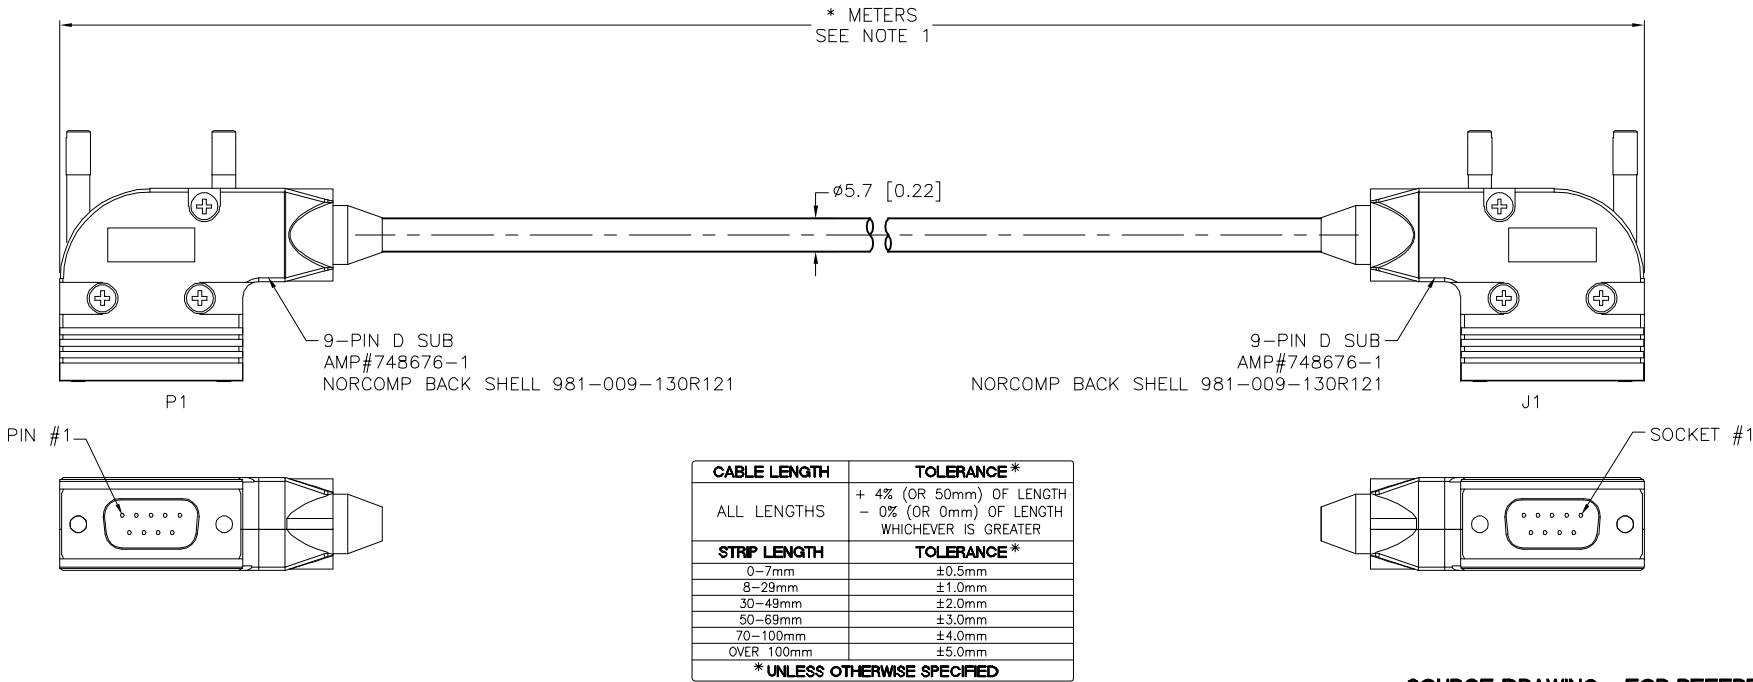


MALE END VIEW (P1)	FEMALE END VIEW (J1)	WIRING DIAGRAM	SPECIFICATIONS	
 1 = N/C 2 = ORANGE 3 = WHITE/GREEN 4 = N/C 5 = N/C 6 = N/C 7 = WHITE/ORANGE 8 = GREEN 9 = N/C	 1 = N/C 2 = ORANGE 3 = WHITE/GREEN 4 = N/C 5 = N/C 6 = N/C 7 = WHITE/ORANGE 8 = GREEN 9 = N/C	P1 J1 2 <----- C 2 3 <----- C 3 7 <----- C 7 8 <----- C 8 1 < N/C N/C C 1 4 < N/C N/C C 4 5 < N/C N/C C 5 6 < N/C N/C C 6 9 < N/C N/C C 9	RATED CURRENT [A] 2.0 A RATED VOLTAGE [V] 60 V OUTER CABLE JACKET MATERIAL/COLOR TPU/TEAL (HALOGEN FREE) CONDUCTOR INSULATION MATERIAL HDPE NUMBER OF CONDUCTORS [AWG] 2UTPX26 AWG, STRANDED, CAT 5e SHIELDING ALUM./POLYESTER FOIL AND TINNED COPPER TEMPERATURE RANGE -40°C to +75°C (-40°F to +167°F)	



SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.
 - "/S3471" DESIGNATES DB9 EXTENSION WITH PIN TO PIN WIRING: 2,3,7,8 AND THUMB SCREWS.

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH. 2. "/S3471" DESIGNATES DB9 EXTENSION WITH PIN TO PIN WIRING: 2,3,7,8 AND THUMB SCREWS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT NF		DATE 02/12/18		DESCRIPTION DB9MS90 DB9FS90 4413-*M/S3471	
									APVD E.S.		SCALE 1=1.3			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV B				
				DO NOT SCALE THIS DRAWING										
B	ADD "FACE" VIEWS SHOWING PIN #1			RDS	02/22/19	68696								
REV	DESCRIPTION			BY	DATE	ECO NO.								