





MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																													
			<table><tr><td>DEUTSCH CONNECTOR</td><td>DT06-3S-P032</td></tr><tr><td>DEUTSCH WEDGELOCK</td><td>W3S</td></tr><tr><td>DEUTSCH TERMINALS</td><td>0462-201-16141</td></tr><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>2.5 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>60 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/YELLOW (P1), TPE/YELLOW (J1-J3)</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTOR [AWG]</td><td>5x22 AWG (P1), 3x24 AWG (J1-J3)</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	DEUTSCH CONNECTOR	DT06-3S-P032	DEUTSCH WEDGELOCK	W3S	DEUTSCH TERMINALS	0462-201-16141	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	2.5 A	RATED VOLTAGE [V]	60 V	OUTER JACKET MATERIAL/COLOR	PVC/YELLOW (P1), TPE/YELLOW (J1-J3)	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTOR [AWG]	5x22 AWG (P1), 3x24 AWG (J1-J3)	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
DEUTSCH CONNECTOR	DT06-3S-P032																															
DEUTSCH WEDGELOCK	W3S																															
DEUTSCH TERMINALS	0462-201-16141																															
CONTACT CARRIER MATERIAL	NYLON OR TPU																															
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																															
CONTACT MATERIAL/PLATING	BRASS/GOLD																															
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																															
RATED CURRENT [A]	2.5 A																															
RATED VOLTAGE [V]	60 V																															
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW (P1), TPE/YELLOW (J1-J3)																															
CONDUCTOR INSULATION MATERIAL	PVC																															
NUMBER OF CONDUCTOR [AWG]	5x22 AWG (P1), 3x24 AWG (J1-J3)																															
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																															
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																															

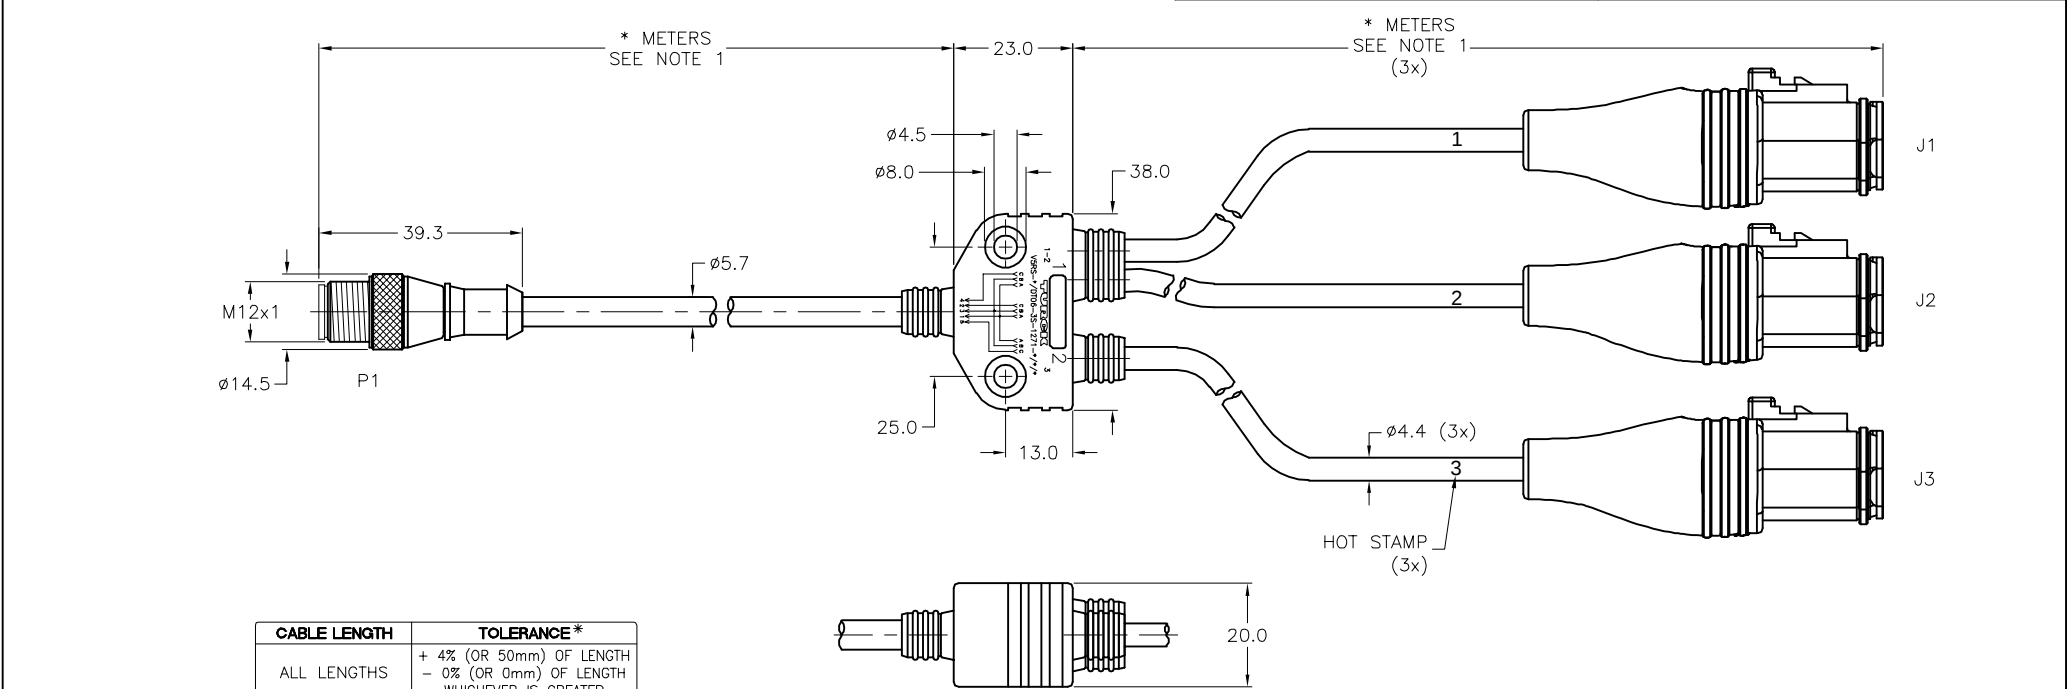


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

A	DRAWING RELEASE	NF	03/23/18	
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
MATERIAL SEE SPECIFICATION	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	NF	DATE	02/26/18		DESCRIPTION V5RS-*/DT06-3S-1271-*/**
		APVD	M.A.	SCALE	1=1.5		
FINISH SEE SPECIFICATION		UNIT OF MEASUREMENT MILLIMETERS			IDENTIFICATION NO.		REV A
		DO NOT SCALE THIS DRAWING			FILE: 777041204		SHEET 1 OF 1