





FEMALE END VIEW	MALE END VIEW	TYP. PANEL CUTOUT	SPECIFICATIONS			
 1 = BROWN 3 = BLUE 4 = BLACK	 1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK		CONTACT CARRIER MATERIAL	NYLON OR TPU		
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
			CONTACT MATERIAL/PLATING	BRASS/GOLD		
			HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL (J1)		
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)		
			RATED CURRENT [A]	4.0 A		
			RATED VOLTAGE [V]	250 V		
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW		
			CONDUCTOR INSULATION MATERIAL	PVC		
			NUMBER OF CONDUCTORS [AWG]	3x24 AWG		
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67		
			MAX. PANEL THICKNESS	3.0 [0.12]		

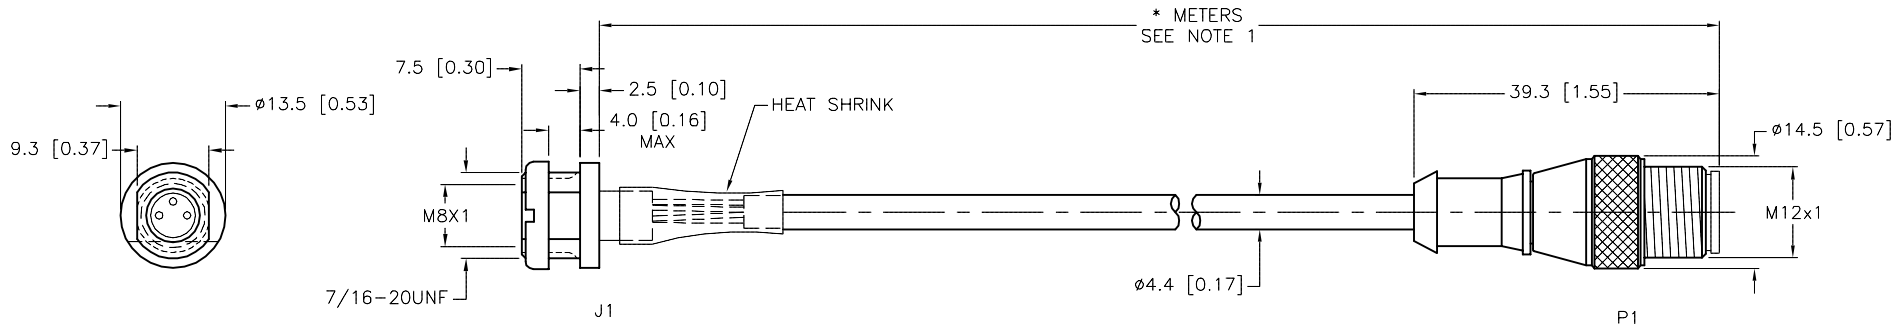


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	RDS	DATE	02/13/18
		APVD	N.M.	SCALE	1=1.0
		UNIT OF MEASUREMENT		DESCRIPTION	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]		MFKS 3F--*--RS 4T	
FINISH		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	REV
				FILE: 777041215	SHEET 1 OF 1

B	ADD PANEL CUTOUT	RDS	02/24/20	75679
REV	DESCRIPTION	BY	DATE	ECO NO.