




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NEOPRENE
A = BROWN B = WHITE C = BLUE D = BLACK E = N/C F = N/C		A = BROWN B = WHITE C = BLUE D = BLACK E = N/C F = N/C		MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONNECTOR TYPE/STYLE - MS 3116M SHELL SIZE - 10 INSERT ARRANGEMENT - 6S		CONNECTOR TYPE/STYLE - MS 3116M SHELL SIZE - 10 INSERT ARRANGEMENT - 6S		CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
				COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
				MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
				RATED CURRENT [A]	8.0 A
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	PVC/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS	4x18 AWG
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
				CONNECTOR TYPE	MIL-DTL-26482

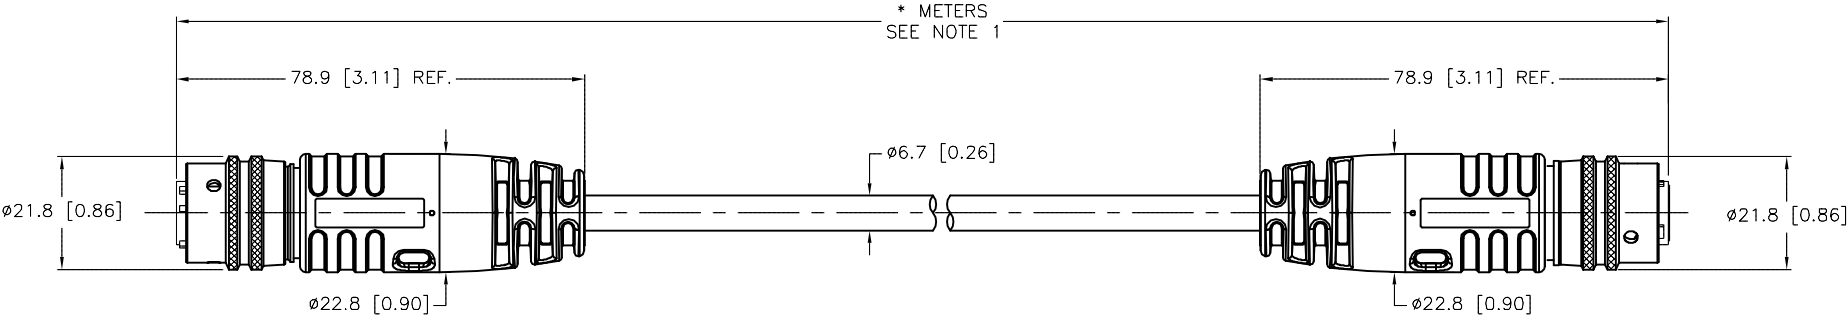


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT NF		DATE 03/29/18	
MATERIAL		SEE SPECIFICATIONS		APVD D.N.		SCALE 1=1.5	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETER [INCH]		MS 3116M-10-6S-0816-* -10-6P	
				CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
				DO NOT SCALE THIS DRAWING		REV A	
A DRAWING RELEASE		NF 04/09/18		FILE: 777041322		SHEET 1 OF 1	
REV DESCRIPTION		BY DATE ECO NO.					