
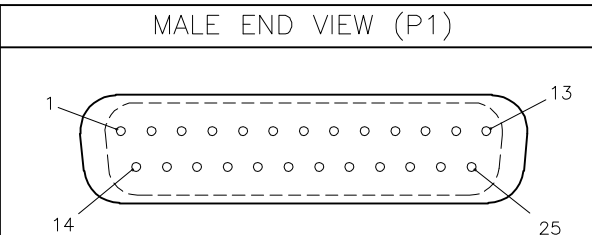
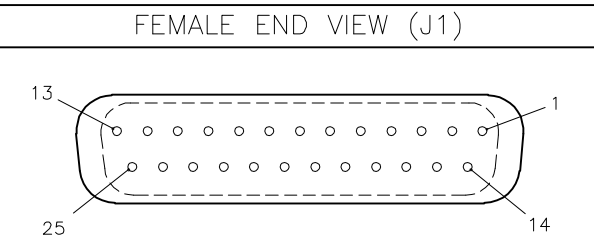


MALE END VIEW (P1)		FEMALE END VIEW (J1)		SPECIFICATIONS																																																					
				<table><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>60 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>18x24 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>26 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED</td></tr><tr><td>TEMPERATURE</td><td>-40°C TO +105°C (-40°F TO +221°F)</td></tr></table>		RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	60 V	OUTER JACKET MATERIAL/COLOR	PVC/YELLOW	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	18x24 AWG	DRAIN/SHIELD	26 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED	TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)																																						
RATED CURRENT [A]	2.0 A																																																								
RATED VOLTAGE [V]	60 V																																																								
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW																																																								
CONDUCTOR INSULATION MATERIAL	PVC																																																								
NUMBER OF CONDUCTORS [AWG]	18x24 AWG																																																								
DRAIN/SHIELD	26 AWG/ALUM.-POLYESTER FOIL & T-C BRAIDED																																																								
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)																																																								
<table><tr><td>1 = BROWN/GREEN</td><td>14 = BLACK</td></tr><tr><td>2 = WHITE/YELLOW</td><td>15 = VIOLET</td></tr><tr><td>3 = BROWN/YELLOW</td><td>16 = PINK/GRAY</td></tr><tr><td>4 = WHITE/GRAY</td><td>17 = N/C</td></tr><tr><td>5 = GRAY/BROWN</td><td>18 = N/C</td></tr><tr><td>6 = WHITE/GREEN</td><td>19 = N/C</td></tr><tr><td>7 = WHITE</td><td>20 = N/C</td></tr><tr><td>8 = BROWN</td><td>21 = N/C</td></tr><tr><td>9 = YELLOW</td><td>22 = N/C</td></tr><tr><td>10 = GRAY</td><td>23 = N/C</td></tr><tr><td>11 = PINK</td><td>24 = N/C</td></tr><tr><td>12 = BLUE</td><td>25 = GREEN</td></tr><tr><td>13 = RED</td><td></td></tr></table>		1 = BROWN/GREEN	14 = BLACK	2 = WHITE/YELLOW	15 = VIOLET	3 = BROWN/YELLOW	16 = PINK/GRAY	4 = WHITE/GRAY	17 = N/C	5 = GRAY/BROWN	18 = N/C	6 = WHITE/GREEN	19 = N/C	7 = WHITE	20 = N/C	8 = BROWN	21 = N/C	9 = YELLOW	22 = N/C	10 = GRAY	23 = N/C	11 = PINK	24 = N/C	12 = BLUE	25 = GREEN	13 = RED		<table><tr><td>1 = BROWN/GREEN</td><td>14 = WHITE/YELLOW</td></tr><tr><td>2 = BROWN/YELLOW</td><td>15 = WHITE/GRAY</td></tr><tr><td>3 = GRAY/BROWN</td><td>16 = WHITE/GREEN</td></tr><tr><td>4 = WHITE</td><td>17 = BROWN</td></tr><tr><td>5 = YELLOW</td><td>18 = GRAY</td></tr><tr><td>6 = PINK</td><td>19 = BLUE</td></tr><tr><td>7 = RED</td><td>20 = BLACK</td></tr><tr><td>8 = VIOLET</td><td>21 = PINK/GRAY</td></tr><tr><td>9 = N/C</td><td>22 = N/C</td></tr><tr><td>10 = N/C</td><td>23 = N/C</td></tr><tr><td>11 = N/C</td><td>24 = N/C</td></tr><tr><td>12 = N/C</td><td>25 = N/C</td></tr><tr><td>13 = GREEN</td><td></td></tr></table>		1 = BROWN/GREEN	14 = WHITE/YELLOW	2 = BROWN/YELLOW	15 = WHITE/GRAY	3 = GRAY/BROWN	16 = WHITE/GREEN	4 = WHITE	17 = BROWN	5 = YELLOW	18 = GRAY	6 = PINK	19 = BLUE	7 = RED	20 = BLACK	8 = VIOLET	21 = PINK/GRAY	9 = N/C	22 = N/C	10 = N/C	23 = N/C	11 = N/C	24 = N/C	12 = N/C	25 = N/C	13 = GREEN			
1 = BROWN/GREEN	14 = BLACK																																																								
2 = WHITE/YELLOW	15 = VIOLET																																																								
3 = BROWN/YELLOW	16 = PINK/GRAY																																																								
4 = WHITE/GRAY	17 = N/C																																																								
5 = GRAY/BROWN	18 = N/C																																																								
6 = WHITE/GREEN	19 = N/C																																																								
7 = WHITE	20 = N/C																																																								
8 = BROWN	21 = N/C																																																								
9 = YELLOW	22 = N/C																																																								
10 = GRAY	23 = N/C																																																								
11 = PINK	24 = N/C																																																								
12 = BLUE	25 = GREEN																																																								
13 = RED																																																									
1 = BROWN/GREEN	14 = WHITE/YELLOW																																																								
2 = BROWN/YELLOW	15 = WHITE/GRAY																																																								
3 = GRAY/BROWN	16 = WHITE/GREEN																																																								
4 = WHITE	17 = BROWN																																																								
5 = YELLOW	18 = GRAY																																																								
6 = PINK	19 = BLUE																																																								
7 = RED	20 = BLACK																																																								
8 = VIOLET	21 = PINK/GRAY																																																								
9 = N/C	22 = N/C																																																								
10 = N/C	23 = N/C																																																								
11 = N/C	24 = N/C																																																								
12 = N/C	25 = N/C																																																								
13 = GREEN																																																									

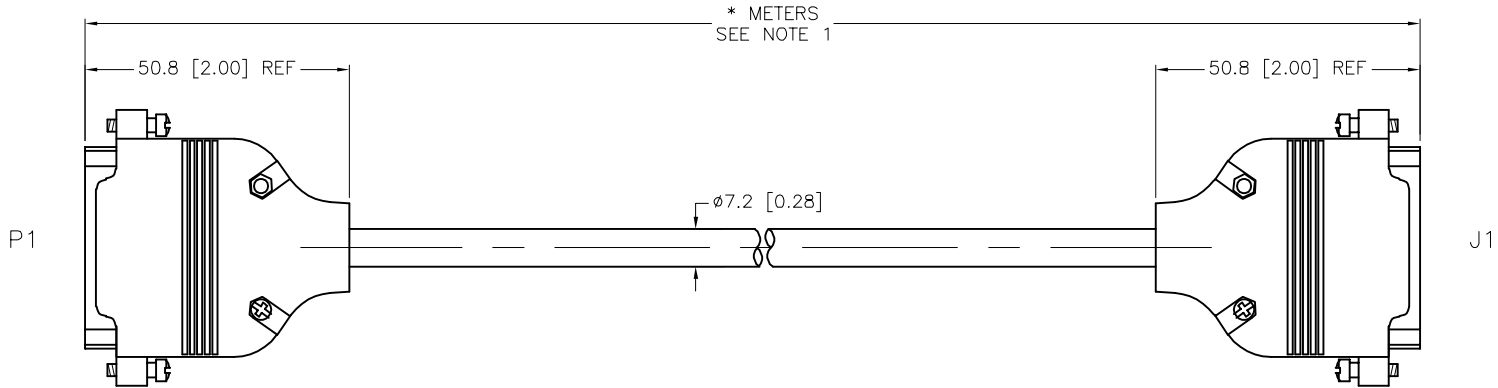

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- 1."*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S3489" DESIGNATES CUSTOM WIRING BECKHOFF TO SMC CONTROLLER.
3. TRIM UNUSED CONDUCTORS AND DRAIN BACK TO CABLE JACKET, BOTH ENDS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RDS		DATE 04/20/18	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD D.L.		SCALE 1=1.5	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		MILLIMETER [INCH]		DB25M-*--0942-DB25F/S3489	
SEE SPECIFICATIONS									IDENTIFICATION NO.	
									REV	
									B	
B ADD WIRING & UPDATE SPECS									FILE: 777041434	
REV DESCRIPTION									SHEET 1 OF 2	
NF 10/08/24 500000010592										
BY DATE ECO NO.										