



SPECIFICATIONS		
CONTACT CARRIER MATERIAL	NYLON OR TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	250 V	
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLUE	
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)	
NUMBER OF CONDUCTORS [AWG] 4x18 AWG		
DRAIN/SHIELD	20 AWG/ALUMPOLYESTER FOIL	
TEMPERATURE RANGE -40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	

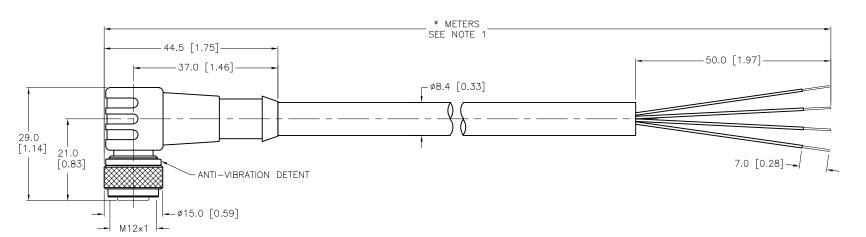



CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE*				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S618" DESIGNATES SHIELD AND DRAIN WIRE. DRAIN WIRE NOT CONNECTED AT PLUG. ELECTRICAL NOISE SHIELDING.
- 3. "/S679" DESIGNATES BLUE-GRAY MOLD BODY.

С	UPDATED DRAWING	AS	07/17/24	80413
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
1. 2. 3. 4.	⊕ □		
MATERIAL		DRFT NF	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD T.V.	
	DRAWING ARE FOR		

FINISH

SEE SPECIFICATIONS

REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION

DATE 05/16/18 DESCRIPTION SCALE 1=1.0 UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300

(763) 553-0708 fax www.turck.us

WKC 4.41T-*/S618/S679 IDENTIFICATION NO.

REV FILE: 777041545 SHEET 1 OF 1