
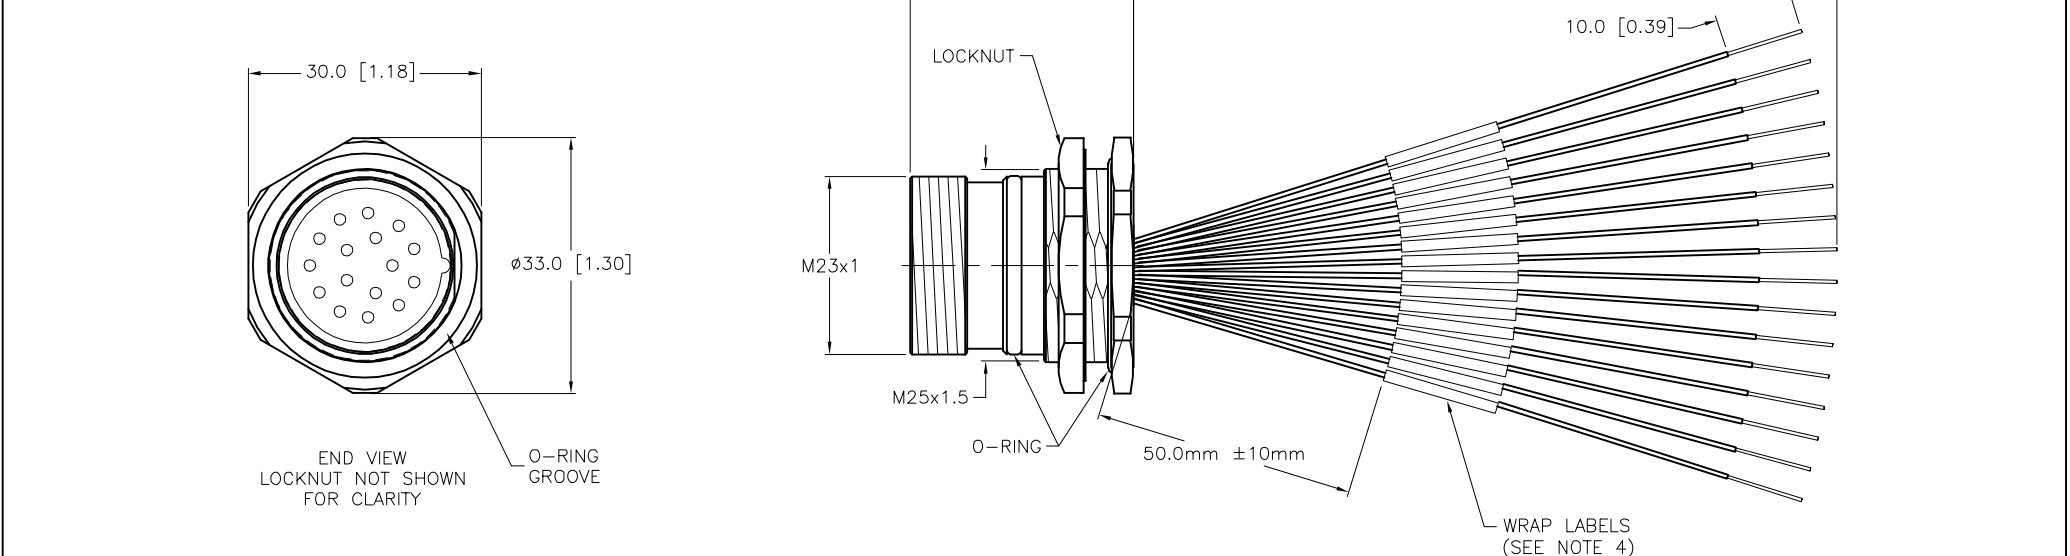


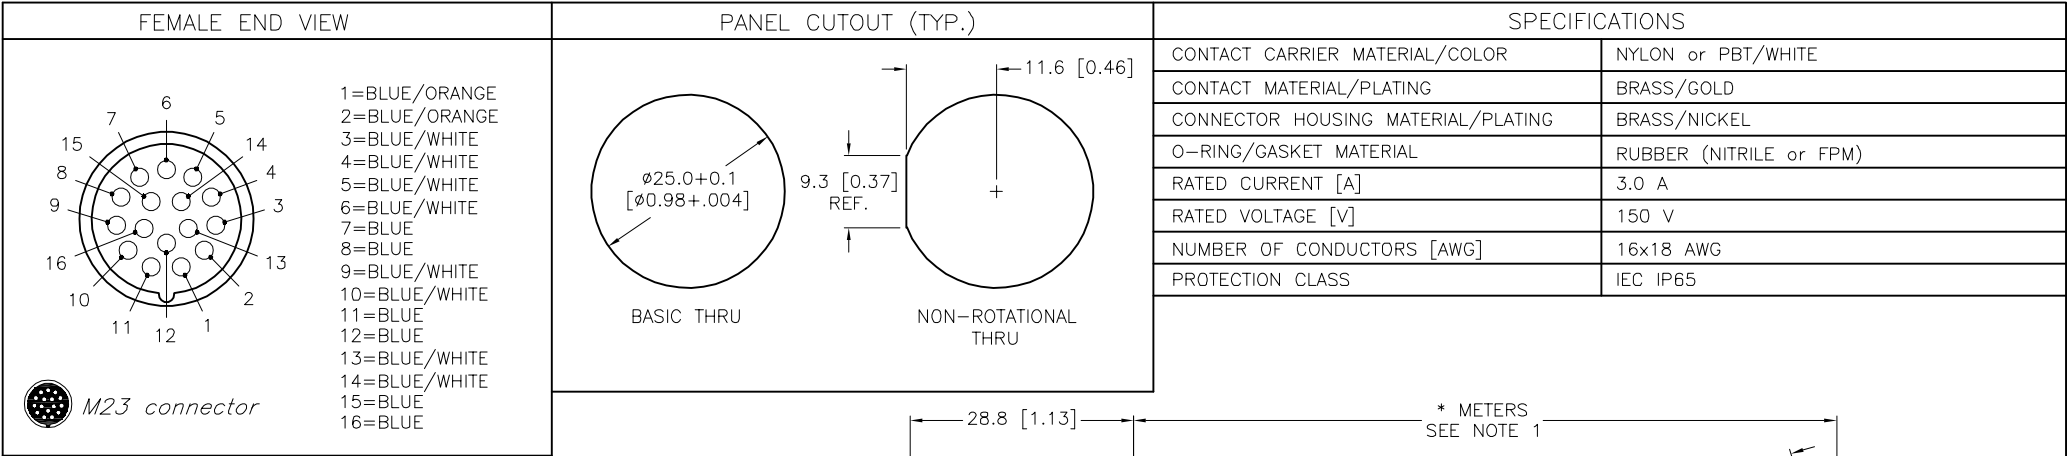

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. MAXIMUM WALL THICKNESS 6.5 [0.256].
3. "/S613" DESIGNATES 18 AWG CONDUCTORS.
4. "/CS16531" DESIGNATES NEXT GEN3 JUNE 2020 UPDATE. CODE E - M23 16 PIN - CUSTOM WIRING. REAR MOUNT RECEPTACLES TO INCLUDE LOCK NUT AND O-RING INSTALLED ON BODY.
5. WRAP LABELS ON ALL CONDUCTORS. WRAP LABELS NUMBERED WITH CORRESPONDING WIRE IDENTIFICATION NUMBERS. ("1" EQUALS "BLUE/ORANGE #1")

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	± 0.5 mm
8-29mm	± 1.0 mm
30-49mm	± 2.0 mm
50-69mm	± 3.0 mm
70-100mm	± 4.0 mm
OVER 100mm	± 5.0 mm
*UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							TURCK			
MATERIAL					DRFT NF		DATE 05/23/18		DESCRIPTION	
SEE SPECIFICATIONS					APVD D.L.		SCALE 1=1.0		CKFD 16-16-*/S613/CS16531	
FINISH					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		C	
C CONDUCTOR COLOR CHANGE AND CS16531 UPDATE					DO NOT SCALE THIS DRAWING		FILE: 777041600		SHEET 1 OF 1	
REV DESCRIPTION										
ER 07/13/20 215723										
BY DATE ECO NO.										