



MALE END VIEW



- 1 = BLACK
2 = WHITE
3 = RED
4 = GREEN
5 = BROWN
6 = BLUE
7 = ORANGE
8 = YELLOW
9 = PURPLE

SPECIFICATIONS

RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/CHROME
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	9x22 AWG
SHIELDING	ALUM.-POLYESTER FOIL & TINNED COPPER BRAID
TEMPERATURE RANGE	-30°C to +80°C (-22°F to +176°F)

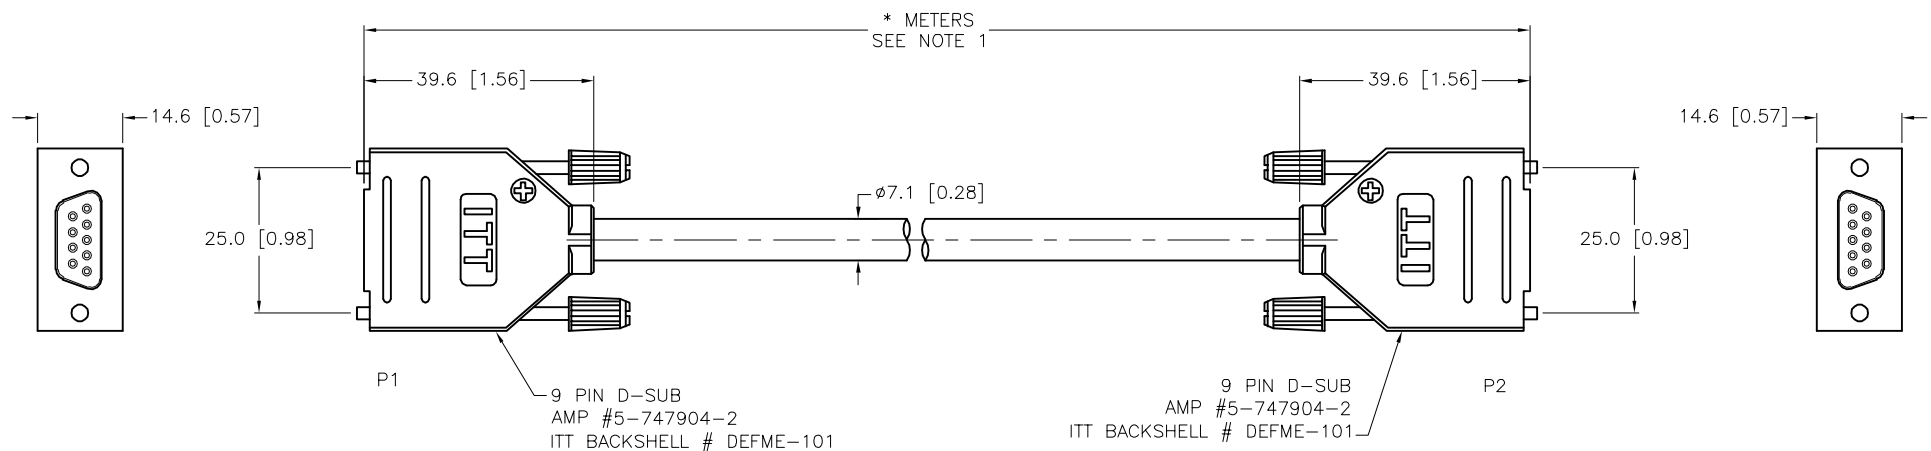


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	05/30/18	DESCRIPTION DB9MS DB9MS 2310-*M		
	APVD		D.L.	SCALE	1=1.3				
FINISH	CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.		REV A	
		DO NOT SCALE THIS DRAWING			FILE: 777041627		SHEET 1 OF 1		

A	DRAWING RELEASE	NF	06/07/18	
REV	DESCRIPTION	BY	DATE	ECO. NO.