



FEMALE END VIEW






WIRING DIAGRAM



SPECIFICATIONS

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| CONTACT CARRIER MATERIAL          | NYLON OR TPU                      |
| MOLDED HEAD MATERIAL/COLOR        | TPU/YELLOW                        |
| CONTACT MATERIAL/PLATING          | BRASS/GOLD                        |
| COUPLING NUT MATERIAL/PLATING     | BRASS/NICKEL                      |
| RATED CURRENT [A]                 | 2.0 A                             |
| RATED VOLTAGE [V]                 | 125 V                             |
| OUTER CABLE JACKET MATERIAL/COLOR | TPU/BLACK                         |
| CONDUCTOR INSULATION MATERIAL     | POLYESTER ELASTOMER               |
| NUMBER OF CONDUCTORS [AWG]        | 4x26 AWG                          |
| TEMPERATURE RANGE                 | -40°C to +105°C (-40°F to +221°F) |
| PROTECTION CLASS                  | MEETS NEMA 1,3,4,6P AND IEC IP67  |

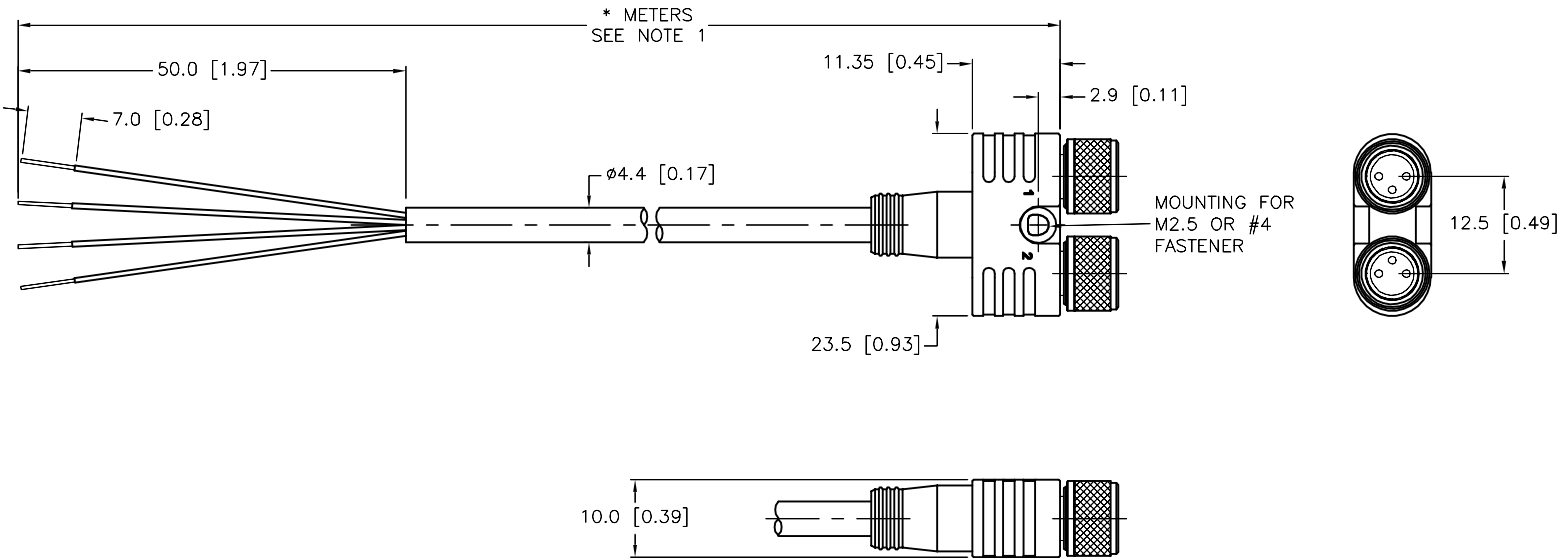

| CABLE LENGTH                 | TOLERANCE*                                                                  |
|------------------------------|-----------------------------------------------------------------------------|
| ALL LENGTHS                  | + 4% (OR 50mm) OF LENGTH<br>- 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| STRIP LENGTH                 | TOLERANCE*                                                                  |
| 0-7mm                        | ±0.5mm                                                                      |
| 8-29mm                       | ±1.0mm                                                                      |
| 30-49mm                      | ±2.0mm                                                                      |
| 50-69mm                      | ±3.0mm                                                                      |
| 70-100mm                     | ±4.0mm                                                                      |
| OVER 100mm                   | ±5.0mm                                                                      |
| * UNLESS OTHERWISE SPECIFIED |                                                                             |

- NOTES:
- "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
  - "/S90" DESIGNATES POLYURETHANE (TPU) CABLE.
  - "/S101" DESIGNATES FLEXLIFE-20 AND CTRACK CABLE.


|     |                 |    |          |          |
|-----|-----------------|----|----------|----------|
| A   | DRAWING RELEASE | NF | 06/22/18 |          |
| REV | DESCRIPTION     | BY | DATE     | ECO. NO. |

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.  
2.  
3.  
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT NF  
APVD T.V.

DATE 06/18/18  
SCALE 1=1.0

UNIT OF MEASUREMENT  
MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

DESCRIPTION  
YP2-\*/2MFK 3/S90/S101

IDENTIFICATION NO.  
FILE: 777041739

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
www.turck.us

REV  
A

SHEET 1 OF 1