



FEMALE END VIEW



- 1 = BLACK U1 (12 AWG)
2 = N/C
3 = BLACK W3 (12 AWG)
4 = BLACK 8
5 = BLACK 5
6 = BLACK 7
7 = BLACK V2 (12 AWG)
8 = BLACK 6
⊕ = GREEN/YELLOW & HOUSING

SPECIFICATIONS


OUTER CABLE JACKET MATERIAL/COLOR	TPU/ORANGE
CONDUCTOR INSULATION MATERIAL	PVC/NYLON
NUMBER OF CONDUCTORS [AWG]	4x12 AWG, 4x18 AWG (2x SHIELDED, TWISTED PAIRS)
SHIELDING	T-C BRAIDED (PAIRS), T-C BRAIDED (OVERALL)
TEMPERATURE RANGE	-35°C to +80°C (-31°F to +176°F)

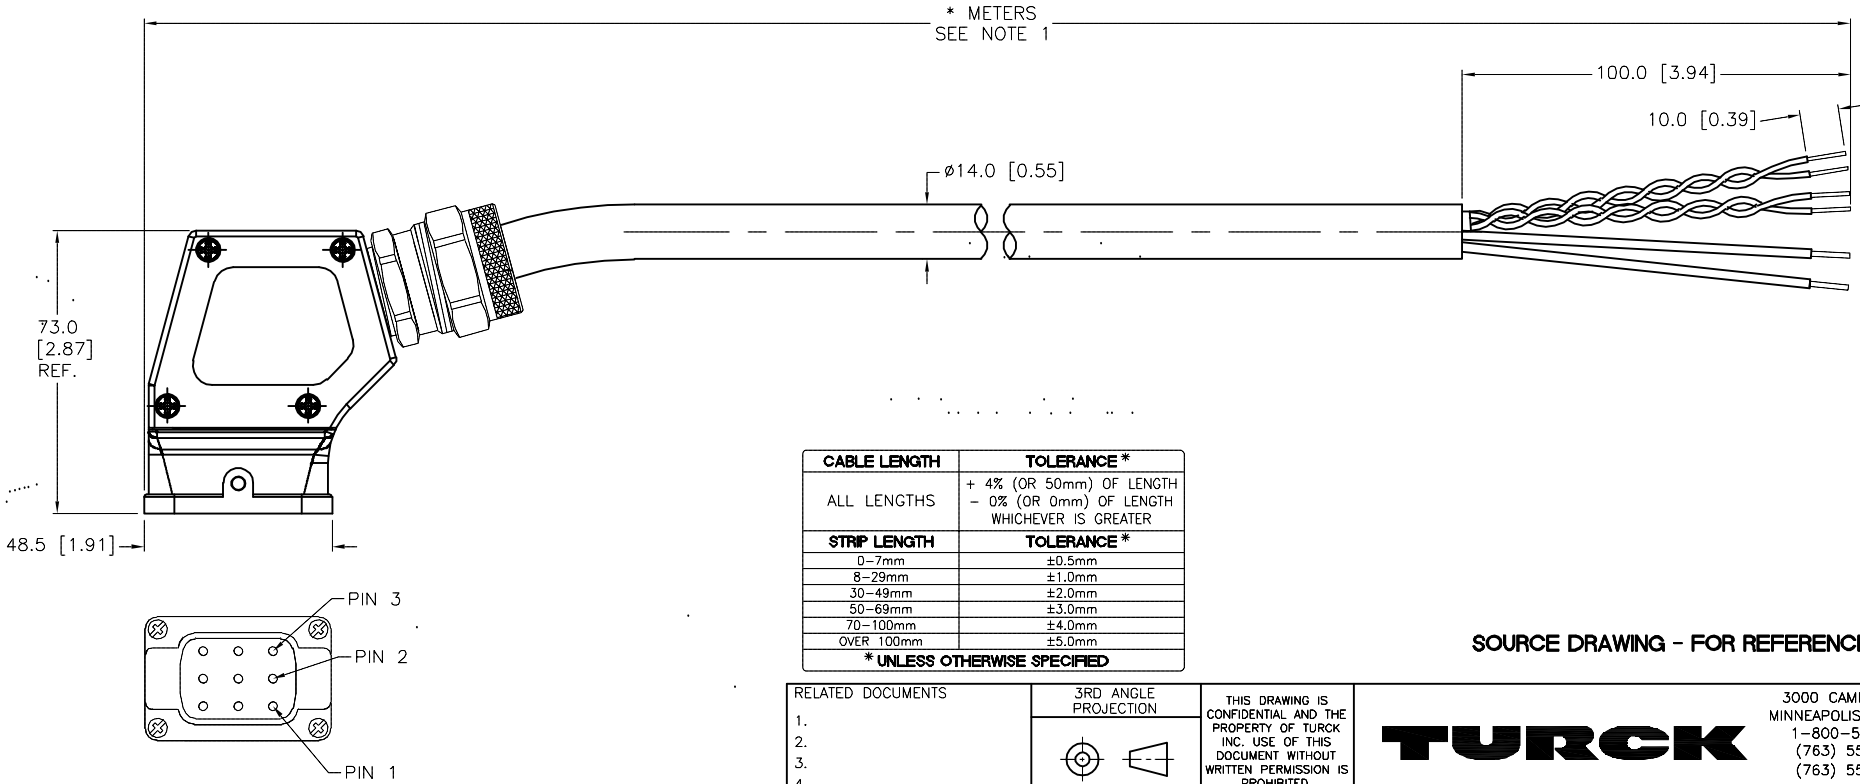

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S3334" DESIGNATES HARTING CONTACT ROTATED 180 DEGREES FROM STANDARD.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	07/31/18	DESCRIPTION HANQWM8/OF-1458-*/S3334	
		APVD	E.S.	SCALE	1=2.0		
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.	REV A
			MILLIMETER [INCH]				
		DO NOT SCALE THIS DRAWING			FILE: 777041937	SHEET 1 OF 1	

A	DRAWING RELEASE	ER	08/13/18	
REV	DESCRIPTION	BY	DATE	ECO NO.