


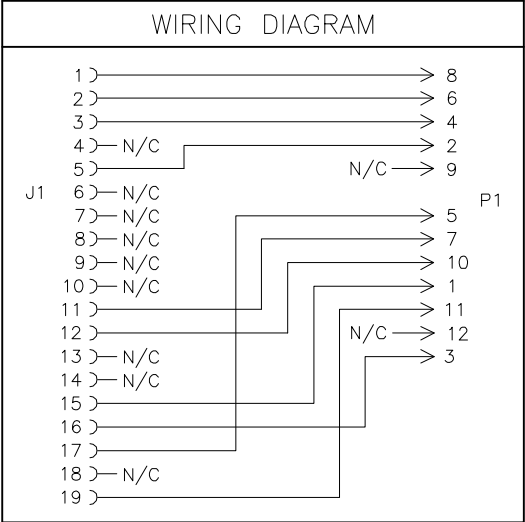


FEMALE END VIEW (J1)		MALE END VIEW (P1)		SPECIFICATIONS	
  M23 connector		  M23 connector		CONTACT CARRIER MATERIAL	NYLON or PBT
1 = PINK 2 = YELLOW 3 = GREEN/YELLOW 4 = N/C 5 = BLUE 6 = N/C 7 = N/C 8 = N/C 9 = N/C 10 = N/C 11 = GRAY 12 = GREEN 13 = N/C 14 = N/C 15 = BROWN 16 = WHITE 17 = VIOLET 18 = N/C 19 = BLACK		1 = BROWN 2 = BLUE 3 = WHITE 4 = GREEN/YELLOW 5 = VIOLET 6 = YELLOW 7 = GRAY 8 = PINK 9 = N/C 10 = GREEN 11 = BLACK 12 = N/C		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	6.0 A
				RATED VOLTAGE [V]	150 V
				OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS	11x18 AWG
				DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	IEC IP67

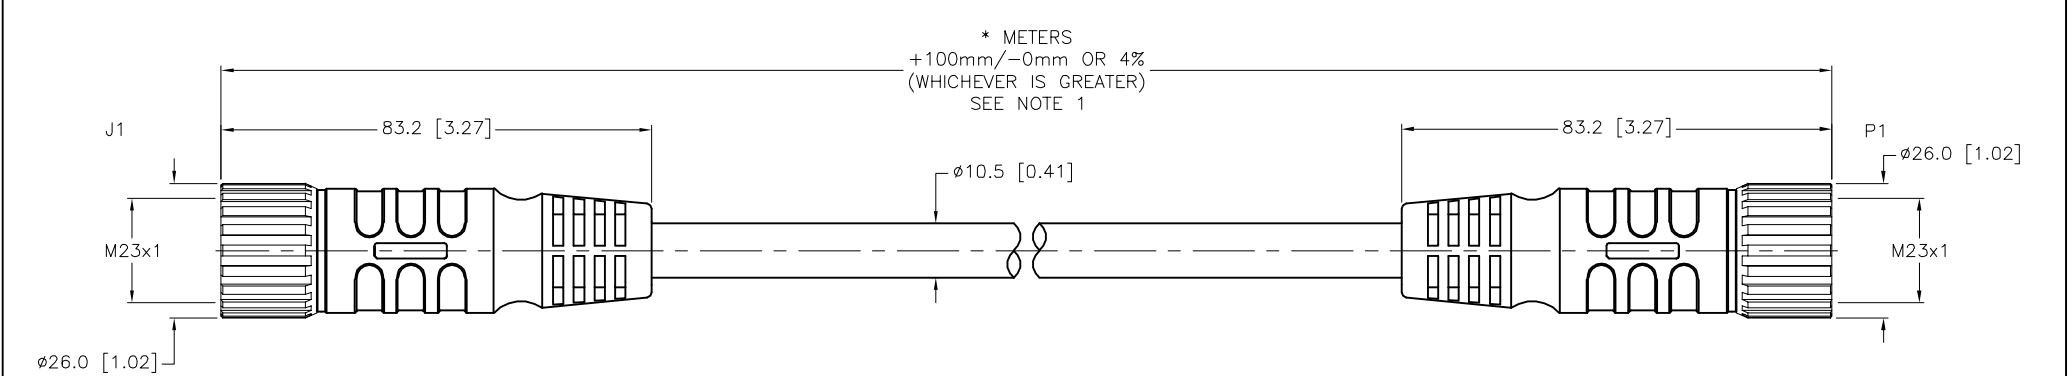

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S3522" DESIGNATES CUSTOM WIRING.

D	UPDATE SHIELD SPEC	NF	02/14/19	68556
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1.			
2.			
3.			
4.			
MATERIAL	SEE SPECIFICATIONS	DRFT NF	DATE 08/30/18
FINISH	SEE SPECIFICATIONS	APVD D.L.	SCALE 1=1.5
		UNIT OF MEASUREMENT MILLIMETER [INCH]	
		CONTACT TURCK FOR MORE INFORMATION	
		DO NOT SCALE THIS DRAWING	
		DESCRIPTION CKM 19-11-*--CSM 12-11/S3522	
		IDENTIFICATION NO.	
		REV D	
		FILE: 777042135	
		SHEET 1 OF 1	