


FEMALE END VIEW




A = BROWN
B = TAN
C = BLUE
D = YELLOW/BROWN
E = GREEN
F = WHITE/YELLOW
G = PINK
H = BROWN/GREEN
J = BLACK
K = WHITE/GREEN
L = RED/BLUE
M = GRAY/PINK
N = ORANGE
P = GRAY
R = RED
S = WHITE
T = VIOLET
U = GRAY/BROWN
V = YELLOW

CONNECTOR
TYPE/STYLE - MS 3118M
SHELL SIZE - 14
INSERT ARRANGEMENT - 19S

SPECIFICATIONS


CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	19x22 AWG
DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL
TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
CONNECTOR TYPE	MIL-DTL-26482

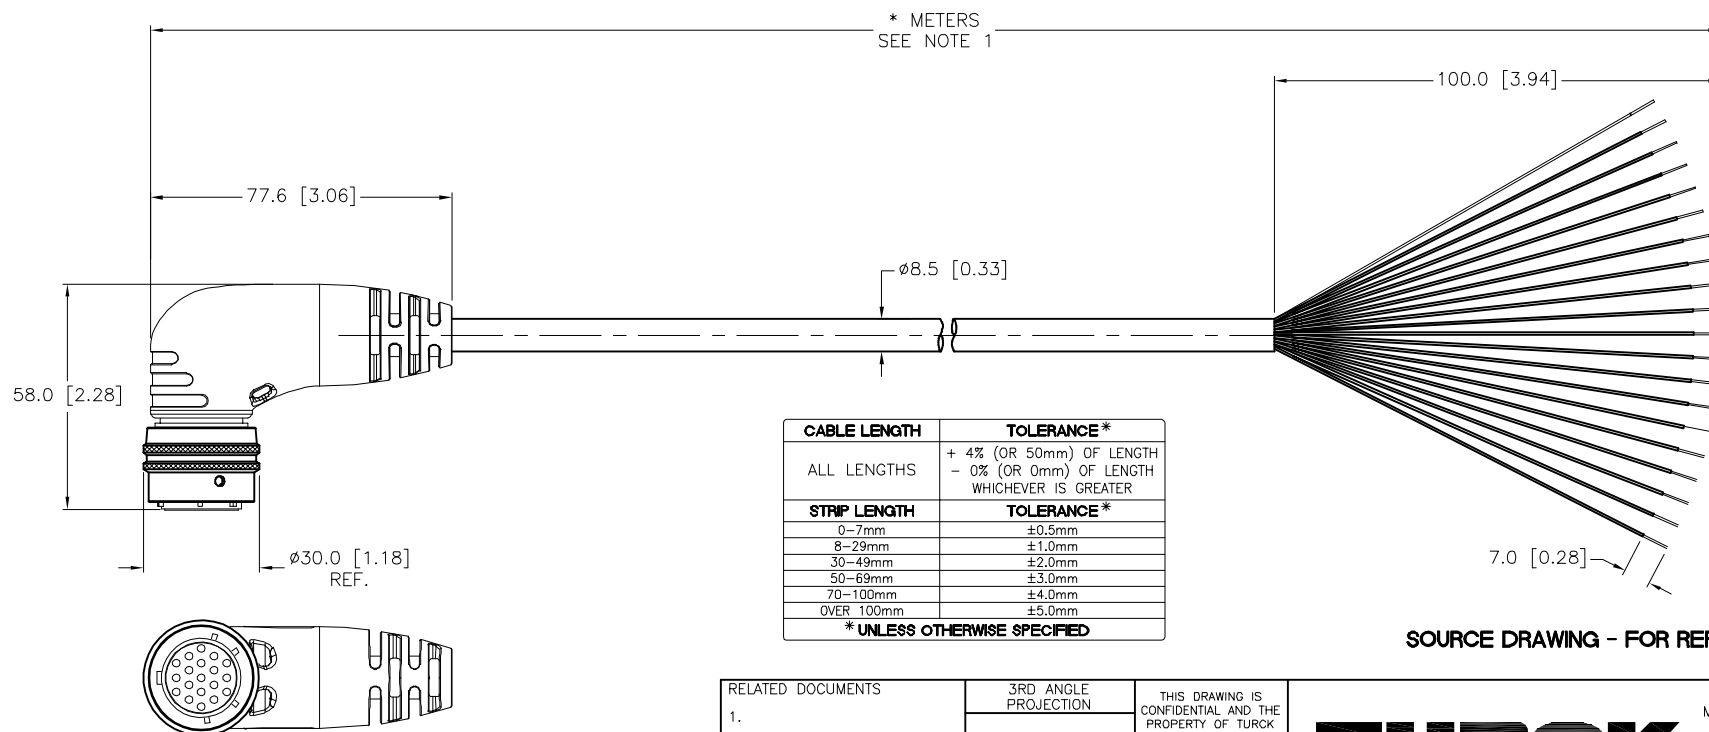

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	08/16/19	DESCRIPTION MS 3118M-14-19S-0995-*			
APVD		J.B.	SCALE	1=2.0					
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.		REV C	
					FILE: 777042180		SHEET 1 OF 1		

C	UPDATE MOLD BODY	NF	05/25/23	78609
REV	DESCRIPTION	BY	DATE	ECO. NO.