

FEMALE END VIEW


1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK

WIRING DIAGRAM

1 = + VOLTAGE (GREEN LED)
2 = OUTPUT
3 = COMMON
4 = OUTPUT (YELLOW LED)

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A LOAD CURRENT/8 mA MAX OPERATING CURRENT AT 30 VDC SUPPLY VOLTAGE
RATED VOLTAGE [V]	10-30 VDC
OUTER JACKET MATERIAL/COLOR	HALOGEN-FREE TPU/BLACK
CONDUCTOR INSULATION MATERIAL	POLYPROPYLENE
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

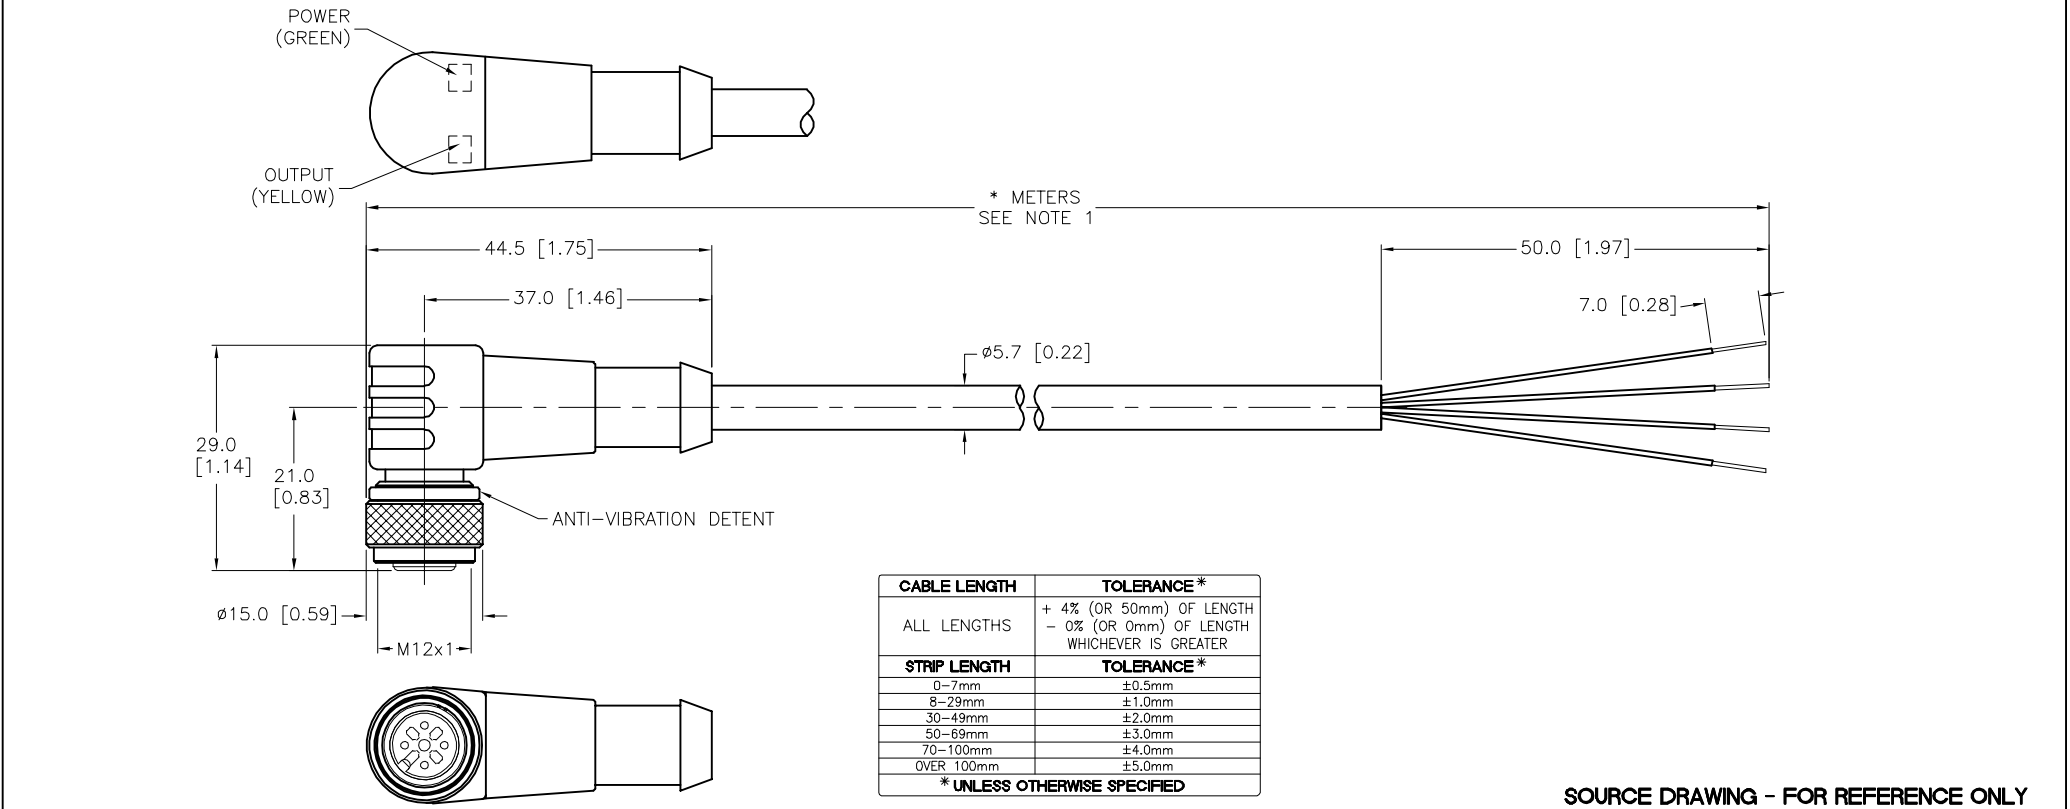

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S760" INDICATES BLACK CABLE JACKET.

3. "/S1064" DESIGNATE HALOGEN-FREE CABLE

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT NF

APVD T.V.

DATE 12/21/18

SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DESCRIPTION

WK 4.4T-* -P7X2/S760/S1064

IDENTIFICATION NO.

REV

B

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

B	UPDATE WIRING DIAGRAM AND SPECS	LV	09/01/22	77912
REV	DESCRIPTION	BY	DATE	ECO. NO.

FILE:777042640

SHEET 1 OF 1