


FEMALE END VIEW




PAIR { 1 = RED
2 = BLACK
3 = WHITE
4 = BLACK
5 = DRAIN



SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	30 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	2UTPX20 AWG, 22 AWG DRAIN
SHIELDING	ALUM.-POLYESTER FOIL & T-C BRAIDED
TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)

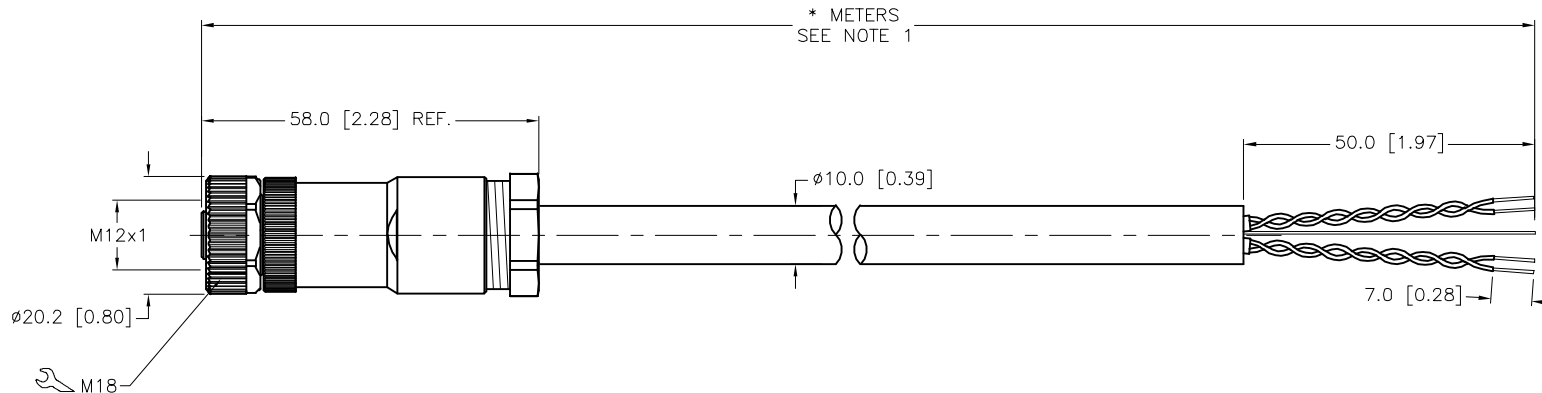

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

2. CABLE PERFORMANCE: 4" RADIUS 10 MILLION FLEX CYCLES. 6" BEND RADIUS 20+ MILLION FLEX CYCLES.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	RDS	DATE	02/05/19
		APVD	E.S.	SCALE	1=1.3
		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION CAS-B 8151-2235-*	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	IDENTIFICATION NO.			REV B
FINISH		DO NOT SCALE THIS DRAWING			FILE: 777042822
		CONTACT TURCK FOR MORE INFORMATION			SHEET 1 OF 1

B	UPDATE COUPLING NUT SPECS AND DWG DEPICTION	RDS	07/20/22	77784
REV	DESCRIPTION	BY	DATE	ECO. NO.