



VALVE END VIEW



1 = BROWN
2 = BLUE
3 = WHITE
GND = BLACK

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/SILVER
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK
VALVE SCREW MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT	4.0 A
RATED VOLTAGE	0-220 V
OUTER JACKET MATERIAL/COLOR	EX60/BLACK
CONDUCTOR INSULATION	XLPE
NUMBER OF CONDUCTORS	4x22 AWG
DRAIN/SHIELD	22 AWG/ALUM-POLYESTER FOIL
TEMPERATURE RATING	-60°C to +105°C (-76°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

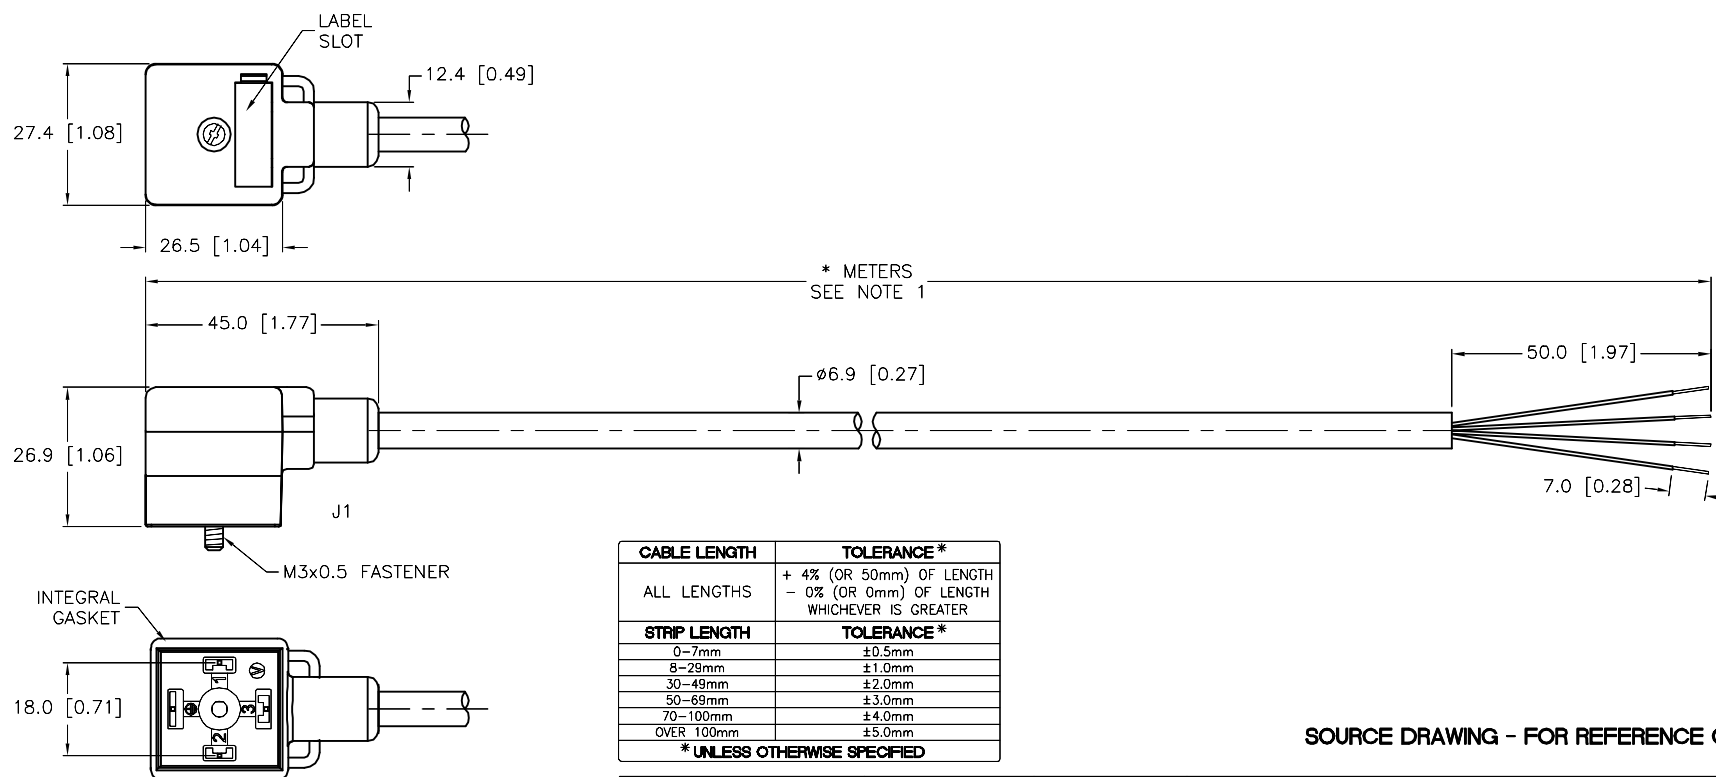


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. DRAIN TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	ER	DATE	02/04/19	DESCRIPTION VAS 3-A1095XL-*M		
FINISH SEE SPECIFICATIONS		APVD	M.A.	SCALE	1=1.5			
		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV B
		DO NOT SCALE THIS DRAWING				FILE: 777042926		SHEET 1 OF 1