



MALE END VIEW



- 1 = BLACK #1
2 = N/C
3 = BLACK #3
4 = BLUE #5
5 = N/C
6 = BLUE #6
7 = BLACK #2
8 = N/C
⊕ = GREEN/YELLOW & HOUSING

SPECIFICATIONS

OUTER CABLE JACKET MATERIAL/COLOR	TPE/ORANGE
CONDUCTOR INSULATION MATERIAL	PVC/NYLON
NUMBER OF CONDUCTORS [AWG]	4x14, 2x16 AWG (1x SHIELDED, TWISTED PAIR)
SHIELDING	T-C BRAIDED (PAIR), T-C BRAIDED (OVERALL)
TEMPERATURE RANGE	-35°C to +80°C (-31°F to +176°F)

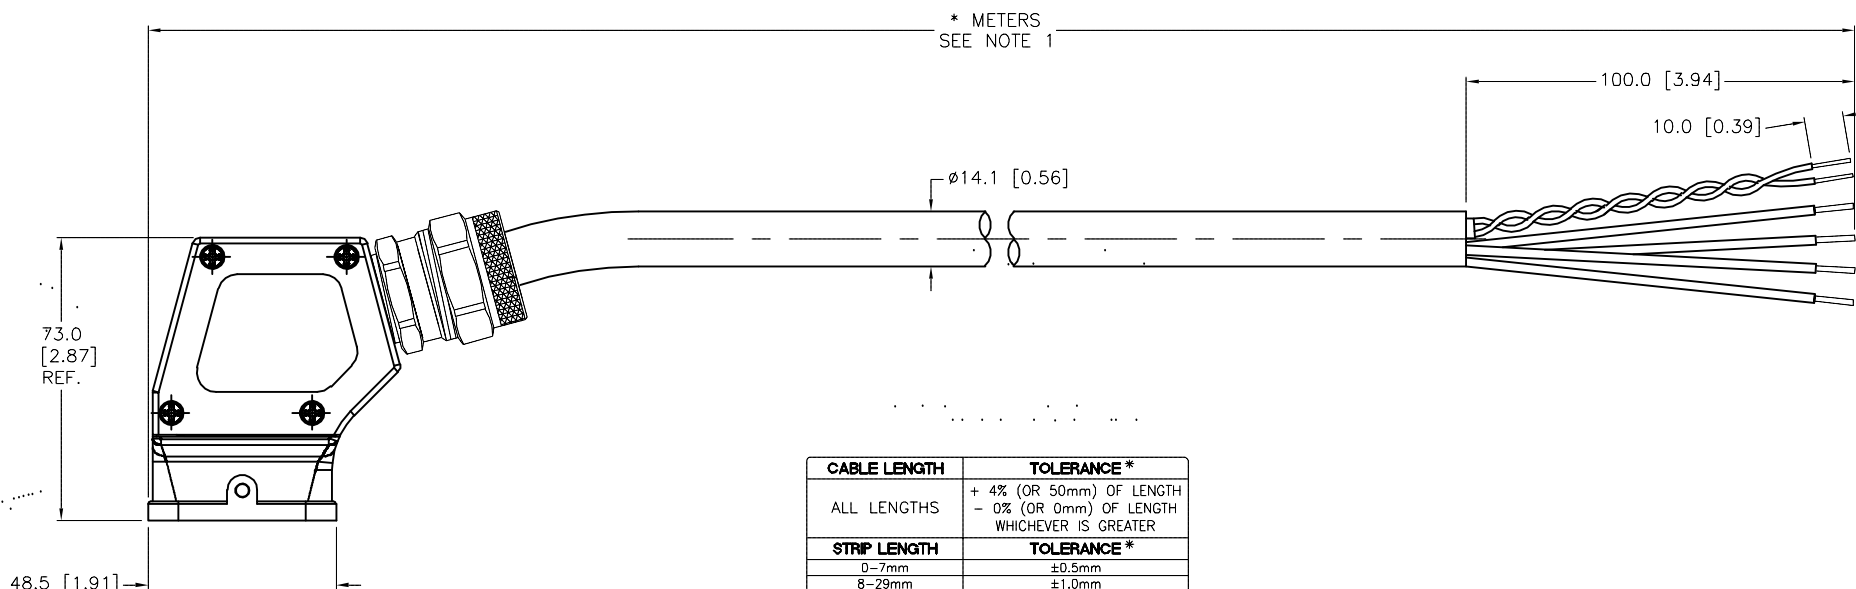

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S3334" DESIGNATES HARTING CONTACT ROTATED 180 DEGREES FROM STANDARD.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.		⊕		DRFT ER		DATE 03/08/19	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD E.S.		SCALE 1=2.0	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION HANQWM8/2-*M/S3334	
A		DRAWING RELEASE		ER		03/27/19	
REV		DESCRIPTION		BY		DATE	
						ECO NO.	
						DO NOT SCALE THIS DRAWING	
						FILE: 777042992	
						SHEET 1 OF 1	