





MALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS																									
 2 (LONG) 1 = BLACK 2 = GREEN 3 = RED 	 $\phi 23.8$ 22.5 [0.937] 0.886	 1 1/8" HEX STOCK 32.2 [1.27] REF. 6.0 [0.23]	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS or COPPER/GOLD</td></tr><tr><td>HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>GASKET MATERIAL</td><td>NITRILE (BUNA-N)</td></tr><tr><td>RATED CURRENT [A]</td><td>26.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 VAC</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBERS OF CONDUCTORS [AWG]</td><td>3x12 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K</td></tr><tr><td>MAXIMUM PANEL THICKNESS</td><td>6.0mm [.236]</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, CE</td></tr></table>	CONTACT CARRIER MATERIAL	PVC	CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD	HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	GASKET MATERIAL	NITRILE (BUNA-N)	RATED CURRENT [A]	26.0 A	RATED VOLTAGE [V]	600 VAC	CONDUCTOR INSULATION MATERIAL	PVC	NUMBERS OF CONDUCTORS [AWG]	3x12 AWG	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K	MAXIMUM PANEL THICKNESS	6.0mm [.236]	APPROVALS AND CERTIFICATIONS	UL 2237, CE	
CONTACT CARRIER MATERIAL	PVC																											
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD																											
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																											
GASKET MATERIAL	NITRILE (BUNA-N)																											
RATED CURRENT [A]	26.0 A																											
RATED VOLTAGE [V]	600 VAC																											
CONDUCTOR INSULATION MATERIAL	PVC																											
NUMBERS OF CONDUCTORS [AWG]	3x12 AWG																											
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K																											
MAXIMUM PANEL THICKNESS	6.0mm [.236]																											
APPROVALS AND CERTIFICATIONS	UL 2237, CE																											

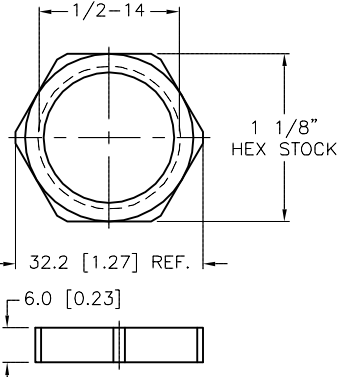

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

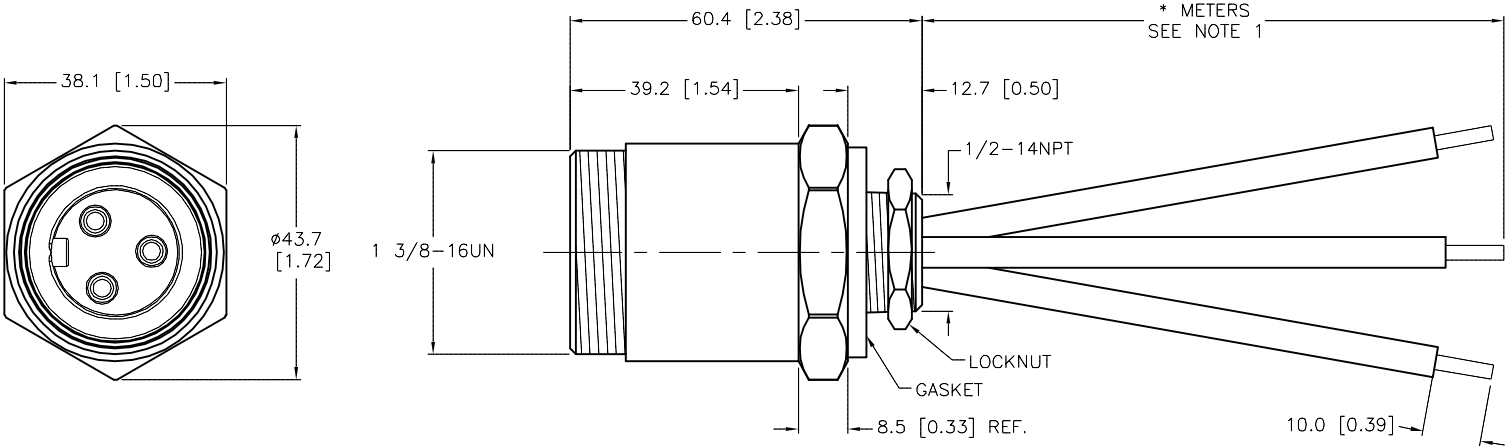


CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S3530" DESIGNATES USING A GREEN GROUND WIRE 3. "/S3546" DESIGNATES USING A RED WIRE ON PIN 3					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 03/14/19		DESCRIPTION GSDFV 32-* /14.5/NPT/S3530/S3546	
					SEE SPECIFICATIONS				APVD T.V.		SCALE 1 = 1.3			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV A				
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING				FILE: 777043007		SHEET 1 OF 1				
A	DRAWING RELEASE			RDS	03/26/19									
REV	DESCRIPTION			BY	DATE		ECO NO.							