




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		DEUTSCH CONNECTOR (J1)	DT06-2S-E008
1 = WHITE 2 = BLACK	1 = WHITE 2 = BLACK	DEUTSCH WEDGELOCK (J1)	W2S
		DEUTSCH TERMINALS (J1)	0462-201-16141
		CONTACT CARRIER MATERIAL (P1)	TPU
		MOLDED HEAD MATERIAL/COLOR (P1)	TPU/YELLOW
		CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
		RATED CURRENT (A)	9.0 A
		OPERATING VOLTAGE [V]	250 V
		MOLDED HEAD MATERIAL/COLOR (J1)	TPU/BLACK
		OUTER JACKET MATERIAL/COLOR	TPE/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	2x18 AWG
		PROTECTION CLASS	IP67, IP69K
		CABLE APPROVALS	(UL) TC DIRECT BURIAL 90C DRY/WET 600V SUNLIGHT RESISTANT OIL RES II -40C OR WTTC 90C DRY/WET 1000V OR AWM 105C 600V OR CSA CIC/TC PVC/N 90C DRY 75C WET 600V FT1 FT4 SUNLIGHT RESISTANT -40C

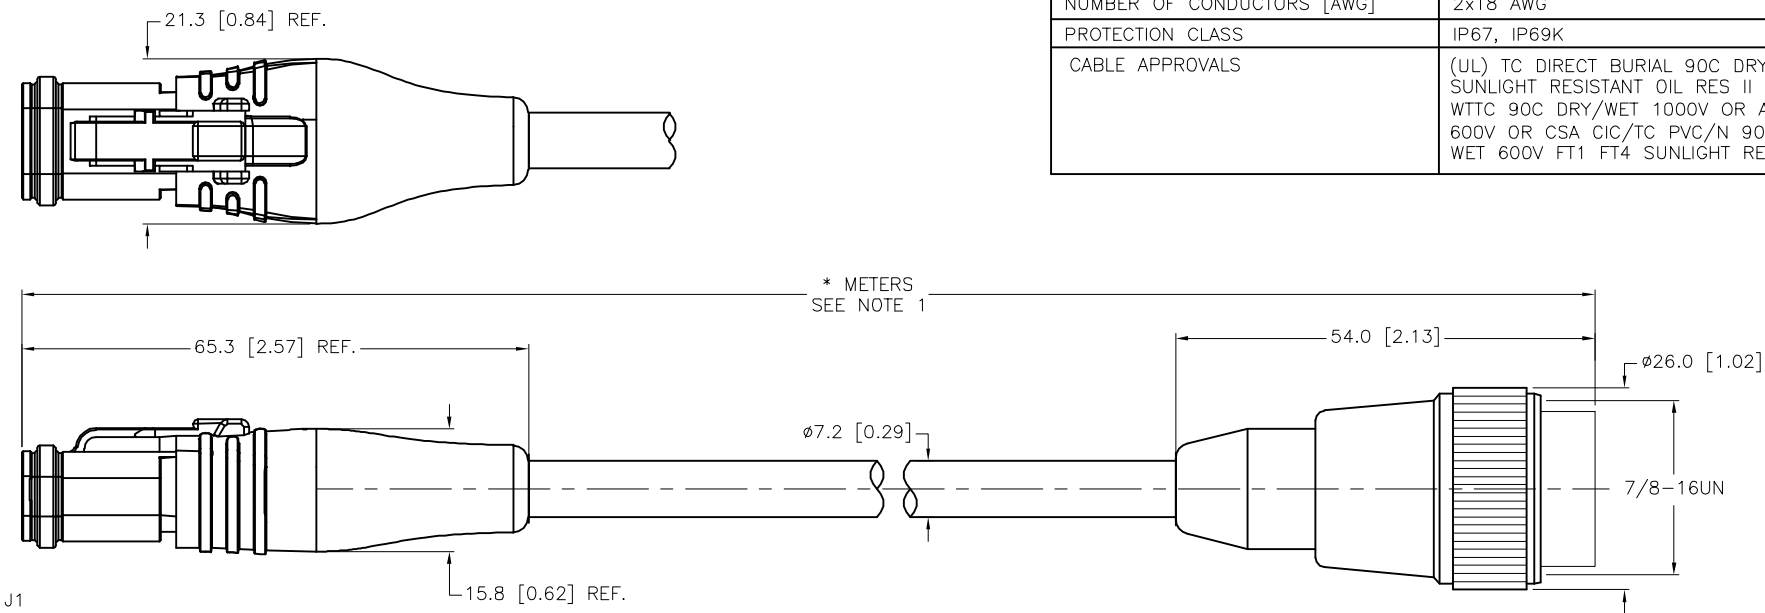


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

<table><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">* UNLESS OTHERWISE SPECIFIED</td></tr></table>					30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	* UNLESS OTHERWISE SPECIFIED		RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
30-49mm	±2.0mm																					
50-69mm	±3.0mm																					
70-100mm	±4.0mm																					
OVER 100mm	±5.0mm																					
* UNLESS OTHERWISE SPECIFIED																						
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					1. 2. 3. 4.																	
MATERIAL SEE SPECIFICATIONS					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		ER		DATE 03/19/19		DESCRIPTION DT06-2S-2125-*M-RYM 20									
							APVD		D.N.		SCALE 1=1.0											
FINISH SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]						IDENTIFICATION NO.		REV B							
							DO NOT SCALE THIS DRAWING						FILE: 777043051				SHEET 1 OF 1					
B		ADD OPERATING VOLTAGE			RDS		04/25/22		77569													
REV		DESCRIPTION			BY		DATE		ECO NO.													