


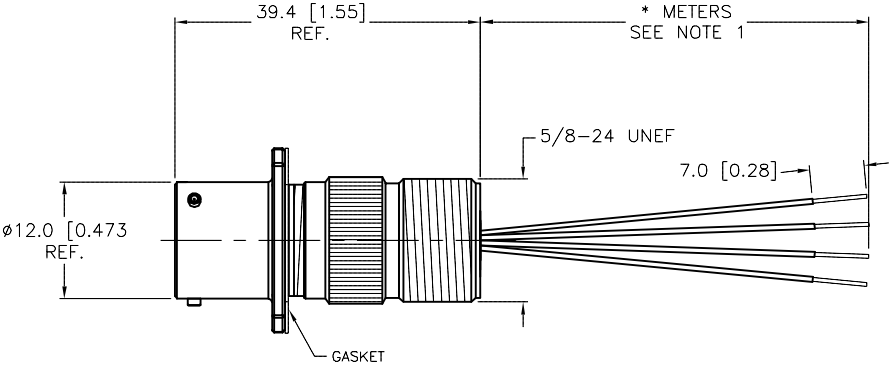


FEMALE END VIEW	GASKET	SPECIFICATIONS	
 A = BROWN B = WHITE C = BLUE D = BLACK		CONTACT CARRIER MATERIAL	NEOPRENE
CONNECTOR TYPE/STYLE - MS 3110A SHELL SIZE - 8 INSERT ARRANGEMENT - 4S		CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
		HOUSING MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	300 V
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS	4X22 AWG
		TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
		CONNECTOR TYPE	MIL-DTL-26482

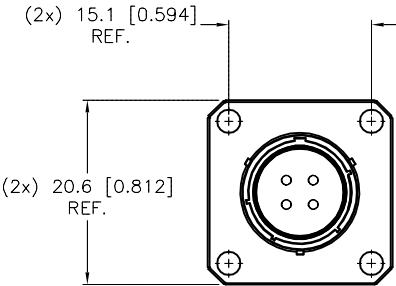


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
1. "*" INDICATES LEADS LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.
2. "/S3543" DESIGNATES THE ADDITION OF ONE GASKET ADDED LOOSE IN THE BAG.
USE GASKET 10130624.

A	DRAWING RELEASE	ER	04/02/19	
REV	DESCRIPTION	BY	DATE	ECO. NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK			
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	ER	DATE	03/11/19	DESCRIPTION	
SEE SPECIFICATIONS		APVD	N.M.	SCALE	1 = 1.0	MS 3110A-8-4S-0516-*/S3543	
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.		REV
SEE SPECIFICATIONS					A		
					FILE: 777043068		SHEET 1 OF 1