

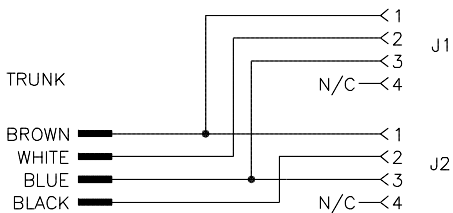


FEMALE END VIEW		WIRING DIAGRAM		SPECIFICATIONS																							
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTOR [AWG]</td><td>4x18 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	TPU/YELLOW	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTOR [AWG]	4x18 AWG	TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONTACT CARRIER MATERIAL	NYLON OR TPU																										
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	250 V																										
OUTER JACKET MATERIAL/COLOR	TPU/YELLOW																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTOR [AWG]	4x18 AWG																										
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)																										
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																										

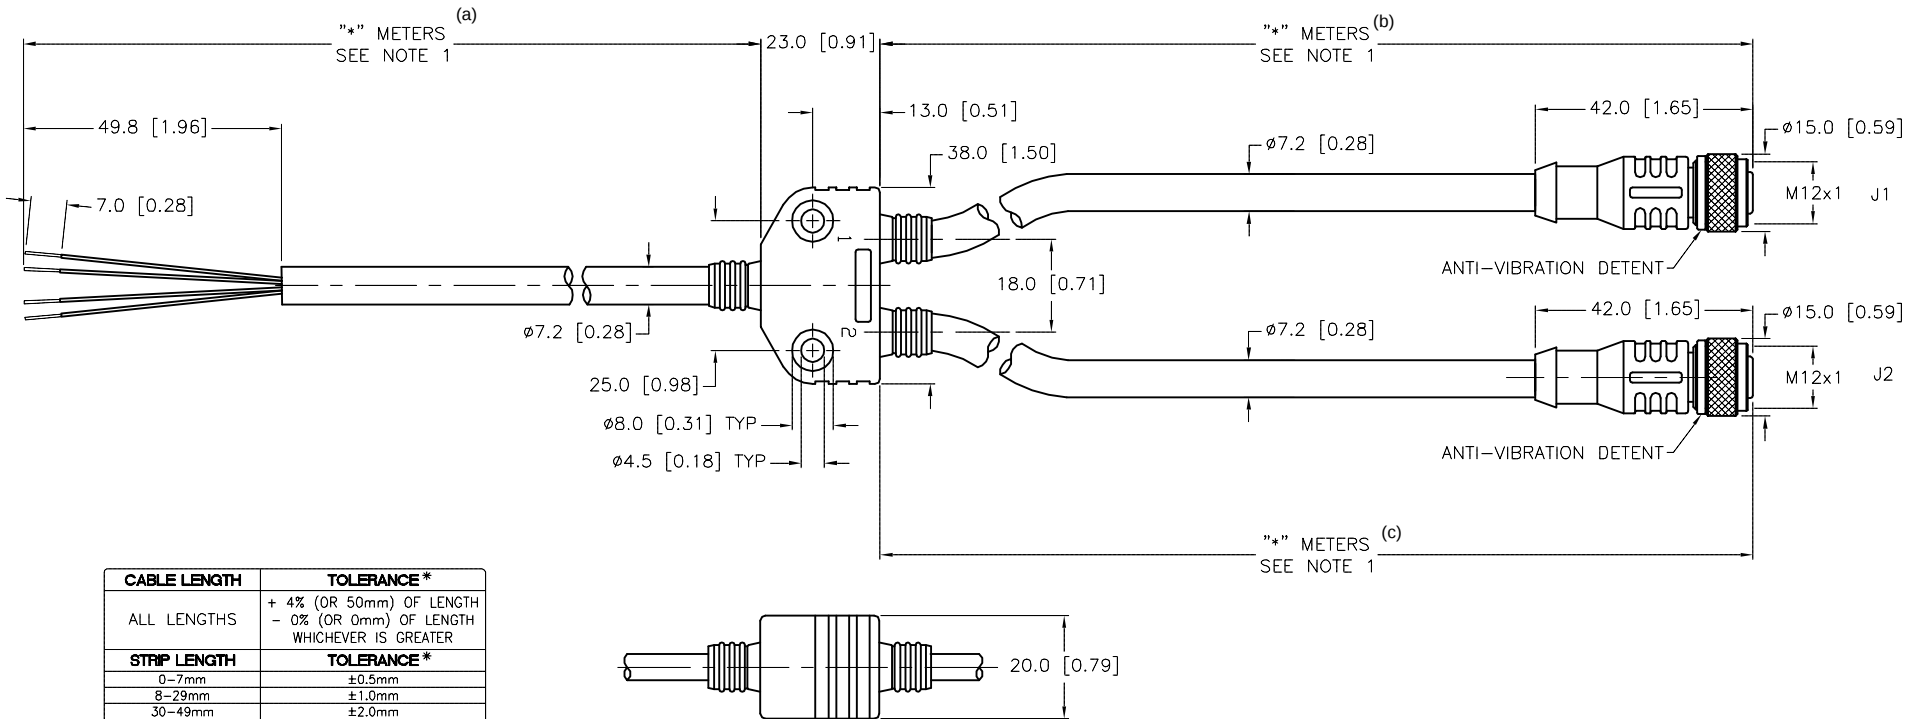


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.
- "/S3514" DESIGNATES PIN #4 ON J1 AND J2 IS "N/C".
- TRIM UNUSED CONDUCTOR BACK TO CABLE JACKET ON BOTH END.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT ER		DATE 05/07/19	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD T.V.		SCALE 1=1.5	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION VB2-*/2RKC 4T-*/*/S90/S3514 (a) (b) (c)	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV B	
SEE SPECIFICATIONS					FILE: 777043260		SHEET 1 OF 1			