





MALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS																									
 2 (LONG) 1 = BLACK 2 = GREEN 3 = WHITE 			<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS or COPPER/GOLD</td></tr><tr><td>HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>GASKET MATERIAL</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>30.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 VAC</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBERS OF CONDUCTORS [AWG]</td><td>3x12 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K</td></tr><tr><td>MAXIMUM PANEL THICKNESS</td><td>6.0mm [.236]</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, CE</td></tr></table>	CONTACT CARRIER MATERIAL	PVC	CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD	HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	GASKET MATERIAL	NITRILE	RATED CURRENT [A]	30.0 A	RATED VOLTAGE [V]	600 VAC	CONDUCTOR INSULATION MATERIAL	PVC	NUMBERS OF CONDUCTORS [AWG]	3x12 AWG	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K	MAXIMUM PANEL THICKNESS	6.0mm [.236]	APPROVALS AND CERTIFICATIONS	UL 2237, CE	
CONTACT CARRIER MATERIAL	PVC																											
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD																											
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																											
GASKET MATERIAL	NITRILE																											
RATED CURRENT [A]	30.0 A																											
RATED VOLTAGE [V]	600 VAC																											
CONDUCTOR INSULATION MATERIAL	PVC																											
NUMBERS OF CONDUCTORS [AWG]	3x12 AWG																											
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K																											
MAXIMUM PANEL THICKNESS	6.0mm [.236]																											
APPROVALS AND CERTIFICATIONS	UL 2237, CE																											

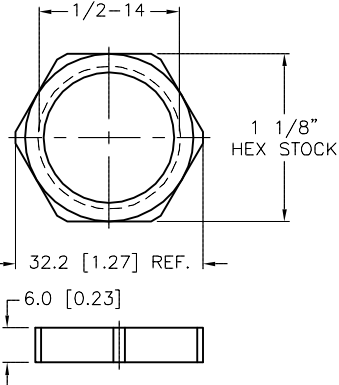

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
- "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S3530" DESIGNATES GREEN GROUND WIRE.

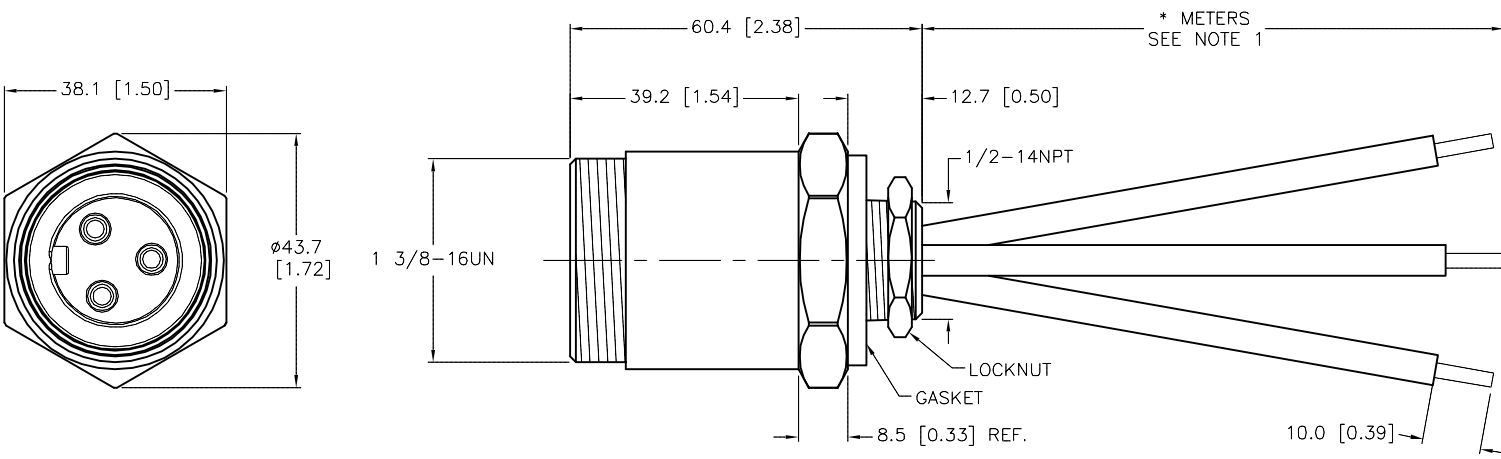

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

50-69mm±3.0mm 70-100mm±4.0mm OVER 100mm±5.0mm * UNLESS OTHERWISE SPECIFIED					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
NOTES: 1. "∗" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S3530" DESIGNATES GREEN GROUND WIRE.					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS APVD T.V.		DATE 06/05/19 SCALE 1 = 1.3		DESCRIPTION GSDFV 32-∗/14.5/NPT/S3530	
FINISH SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV A	
A DRAWING RELEASE					RDS 06/20/19		DO NOT SCALE THIS DRAWING				FILE: 777043341		SHEET 1 OF 1	
REV DESCRIPTION					BY DATE		ECO NO.							