


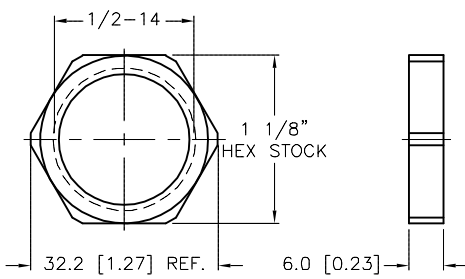


FEMALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS																									
 1 = BLACK 2 = GREEN 3 = WHITE 			<table><tr><td>CONTACT CARRIER MATERIAL</td><td>PVC</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS or COPPER/GOLD</td></tr><tr><td>HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>GASKET MATERIAL</td><td>NITRILE (BUNA-N)</td></tr><tr><td>RATED CURRENT [A]</td><td>40.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 VAC</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBERS OF CONDUCTORS [AWG]</td><td>3x10 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K</td></tr><tr><td>MAXIMUM PANEL THICKNESS</td><td>6.0mm [.236]</td></tr><tr><td>APPROVALS AND CERTIFICATIONS</td><td>UL 2237, CE</td></tr></table>	CONTACT CARRIER MATERIAL	PVC	CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD	HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	GASKET MATERIAL	NITRILE (BUNA-N)	RATED CURRENT [A]	40.0 A	RATED VOLTAGE [V]	600 VAC	CONDUCTOR INSULATION MATERIAL	PVC	NUMBERS OF CONDUCTORS [AWG]	3x10 AWG	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K	MAXIMUM PANEL THICKNESS	6.0mm [.236]	APPROVALS AND CERTIFICATIONS	UL 2237, CE	
CONTACT CARRIER MATERIAL	PVC																											
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD																											
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																											
GASKET MATERIAL	NITRILE (BUNA-N)																											
RATED CURRENT [A]	40.0 A																											
RATED VOLTAGE [V]	600 VAC																											
CONDUCTOR INSULATION MATERIAL	PVC																											
NUMBERS OF CONDUCTORS [AWG]	3x10 AWG																											
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K																											
MAXIMUM PANEL THICKNESS	6.0mm [.236]																											
APPROVALS AND CERTIFICATIONS	UL 2237, CE																											

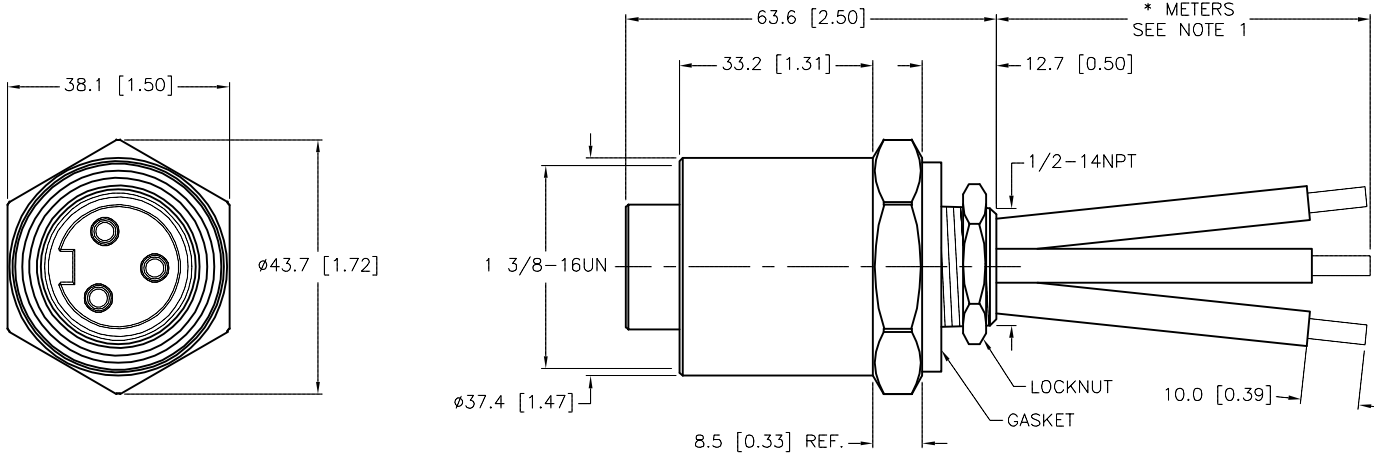

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 2. "/S3530" DESIGNATES GREEN GROUND WIRE

A	DRAWING RELEASE	ER	06/20/19	
REV	DESCRIPTION	BY	DATE	ECO. NO.




CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.									
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT ER		DATE 06/13/19		DESCRIPTION	
SEE SPECIFICATIONS				APVD T.V.		SCALE 1 = 1.3		GKDFV 30-*/14.5/NPT/S3530	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
SEE SPECIFICATIONS				MILLIMETER [INCH]				REV	
				DO NOT SCALE THIS DRAWING				A	
						FILE: 777043372		SHEET 1 OF 1	