

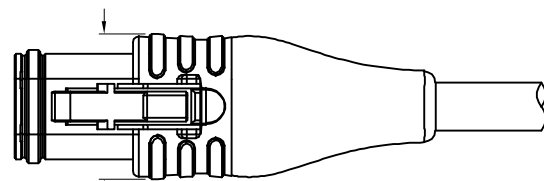
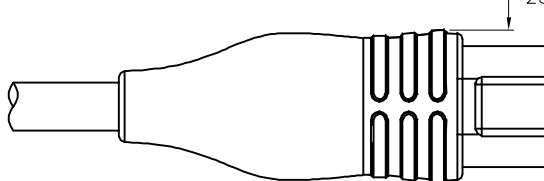
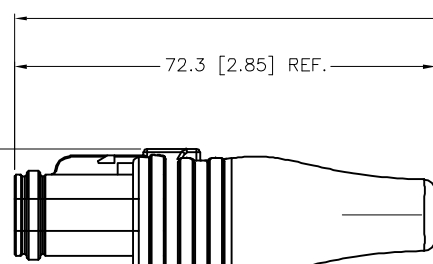
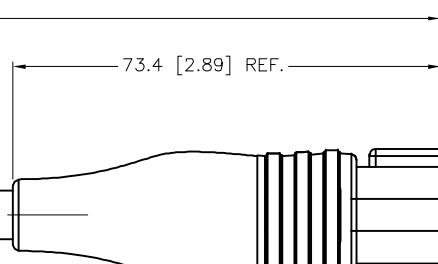



FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		DEUTSCH CONNECTOR	DT06-4S-E008 (J1), DT04-4P (P1)
		DEUTSCH WEDGELOCK	W4S (J1), W4P (P1)
		DEUTSCH TERMINALS	0462-201-16141 (J1), 0460-202-16141 (P1)
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		OPERATING VOLTAGE	250 V
		OUTER JACKET MATERIAL/COLOR	TPU/GRAY
		CONDUCTOR INSULATION MATERIAL	FOAMED HDPE (DATA), PVC (POWER)
		NUMBER OF CONDUCTORS [AWG]	2x17 AWG, 2x20 AWG, 20 AWG DRAIN
		SHIELD	FOIL (PAIRS), FOIL (OVERALL)
		TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
1 = RED (+ VOLTAGE) 2 = WHITE (CAN_H) 3 = BLACK (-VOLTAGE) 4 = BLUE (CAN_L)	1 = RED (+ VOLTAGE) 2 = WHITE (CAN_H) 3 = BLACK (-VOLTAGE) 4 = BLUE (CAN_L)		

																							
25.0 [0.98] REF.		26.3 [1.04] REF.																					
* METERS SEE NOTE 1																							
																							
21.8 [0.86] REF.		73.4 [2.89] REF.																					
J1		P1																					
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">* UNLESS OTHERWISE SPECIFIED</td></tr></table>		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	* UNLESS OTHERWISE SPECIFIED			
CABLE LENGTH	TOLERANCE*																						
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																						
STRIP LENGTH	TOLERANCE*																						
0-7mm	±0.5mm																						
8-29mm	±1.0mm																						
30-49mm	±2.0mm																						
50-69mm	±3.0mm																						
70-100mm	±4.0mm																						
OVER 100mm	±5.0mm																						
* UNLESS OTHERWISE SPECIFIED																							

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. UNUSED CONDUCTOR TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT ER APVD T.V.		DATE 07/18/19 SCALE 1=1.3	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION DT06-4S-0877-*M-DT04-4P	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
FINISH						REV B	
SEE SPECIFICATIONS						FILE: 777043519	
B ADD OPERATING VOLTAGE		RDS 04/25/22		77569		SHEET 1 OF 1	
REV DESCRIPTION		BY DATE		ECO NO.			