


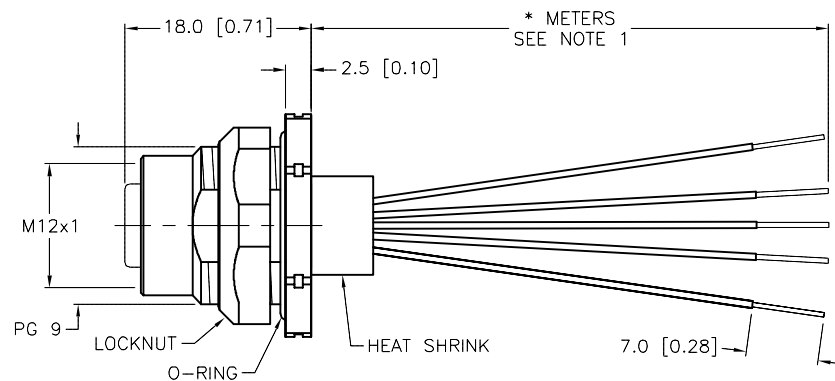


FEMALE END VIEW		TYPICAL PANEL CUTOUT		SPECIFICATIONS																							
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GREY				<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>NYLON OR TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>HOUSING/LOCKNUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>O-RING MATERIAL</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>5x22 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr><tr><td>MAX. PANEL THICKNESS</td><td>3.0 [0.12]</td></tr></table>		CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL	O-RING MATERIAL	NITRILE	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	5x22 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	MAX. PANEL THICKNESS	3.0 [0.12]
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/YELLOW																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL																										
O-RING MATERIAL	NITRILE																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	250 V																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTORS [AWG]	5x22 AWG																										
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																										
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																										
MAX. PANEL THICKNESS	3.0 [0.12]																										
																											

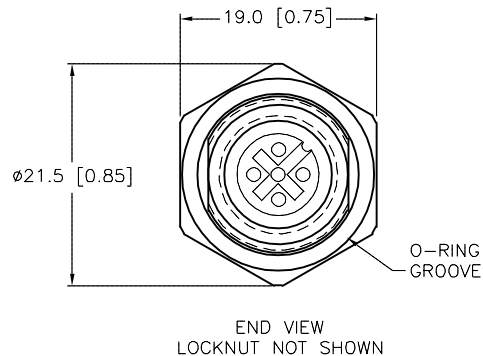


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/C1291" DESIGNATES YELLOW CONTACT CARRIER.

SOURCE DRAWING - FOR REFERENCE ONLY

50-69mm±3.0mm 70-100mm±4.0mm OVER 100mm±5.0mm * UNLESS OTHERWISE SPECIFIED		RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us 		
NOTES:					MATERIAL SEE SPECIFICATIONS FINISH SEE SPECIFICATIONS		DRFT ER DATE 10/04/19		DESCRIPTION FKFD 4.5-*/C1291	
							APVD E.S. SCALE 1=.8			
							UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. REV A	
							FILE: 777043721		SHEET 1 OF 1	