



MALE END VIEW (P1)



1 = BLACK  
2 = WHITE  
3 = RED  
4 = GREEN  
5 = ORANGE  
6 = BLUE

7 = WHITE/BLACK  
8 = RED/BLACK  
9 = GREEN/BLACK  
10 = N/C

FEMALE END VIEW (J1)




1 = BLACK  
2 = WHITE  
3 = RED  
4 = GREEN  
5 = ORANGE  
6 = BLUE  
7 = WHITE/BLACK  
8 = RED/BLACK  
9 = GREEN/BLACK  
10 = N/C  
11 = N/C  
12 = N/C

 M23 connector

SPECIFICATIONS

|                                 |                                   |
|---------------------------------|-----------------------------------|
| OUTER CABLE JACK MATERIAL/COLOR | TPE/YELLOW                        |
| CONDUCTOR INSULATION MATERIAL   | FEP                               |
| NUMBER OF CONDUCTORS [AWG]      | 9x18 AWG                          |
| DRAIN/SHIELD                    | 20 AWG DRAIN/TC-BRAID             |
| TEMPERATURE RANGE               | -40°C to +105°C (-40°F to +221°F) |


GUIDE PIN

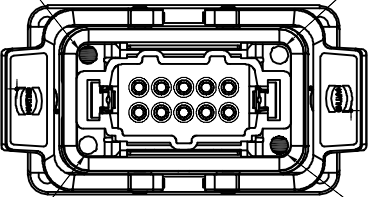

GUIDE BUSHING

GUIDE PIN

GUIDE BUSHING

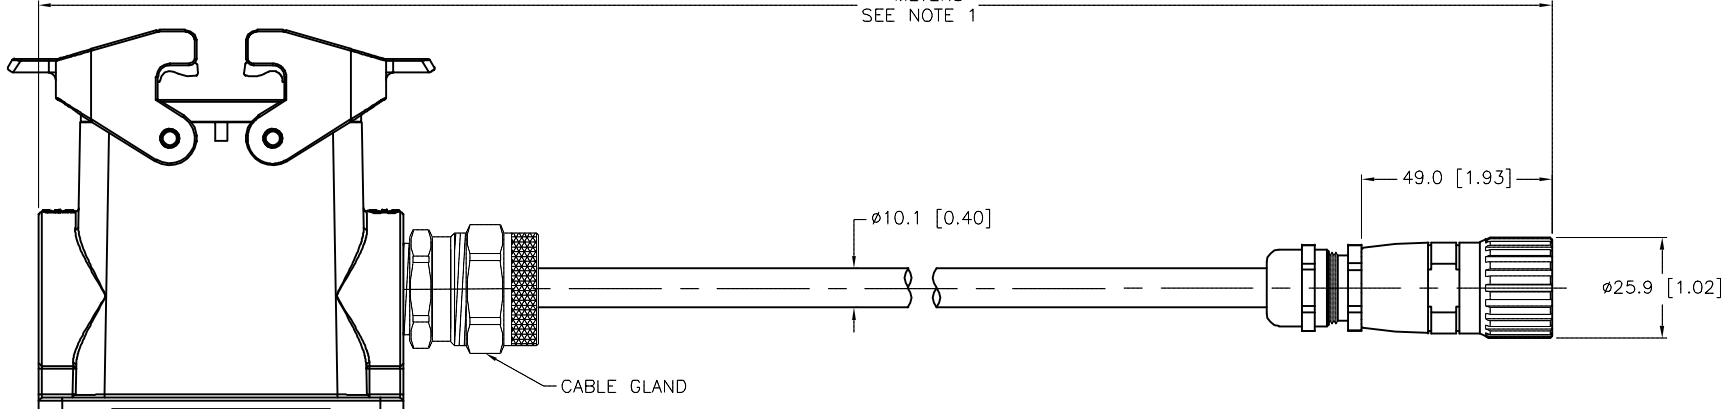

\* METERS  
SEE NOTE 1

49.0 [1.93]

ø10.1 [0.40]

ø25.9 [1.02]

CABLE GLAND

HARTING HOOD:  
19300100231

| CABLE LENGTH                 | TOLERANCE*                                                                  |
|------------------------------|-----------------------------------------------------------------------------|
| ALL LENGTHS                  | + 4% (OR 50mm) OF LENGTH<br>- 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| STRIP LENGTH                 | TOLERANCE*                                                                  |
| 0-7mm                        | ±0.5mm                                                                      |
| 8-29mm                       | ±1.0mm                                                                      |
| 30-49mm                      | ±2.0mm                                                                      |
| 50-69mm                      | ±3.0mm                                                                      |
| 70-100mm                     | ±4.0mm                                                                      |
| OVER 100mm                   | ±5.0mm                                                                      |
| * UNLESS OTHERWISE SPECIFIED |                                                                             |

NOTES:  
1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

|     |                 |    |          |          |
|-----|-----------------|----|----------|----------|
| A   | DRAWING RELEASE | ER | 10/17/19 |          |
| REV | DESCRIPTION     | BY | DATE     | ECO. NO. |


RELATED DOCUMENTS

1.  
2.  
3.  
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT ER  
APVD E.S.

DATE 09/25/19  
SCALE 1=2.0

UNIT OF MEASUREMENT  
MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

**TURCK**

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
www.turck.us

DESCRIPTION  
HANE10M/SF 2326/MCODE5--\*-CK 12

IDENTIFICATION NO.

REV  
A

FILE: 777043766

SHEET 1 OF 1