




FEMALE END VIEW



1 = BROWN
2 = RED
3 = ORANGE
4 = BLUE

SPECIFICATIONS

DEUTSCH CONNECTOR	DT06-4S-E008
DEUTSCH WEDGELOCK	W4S
DEUTSCH TERMINALS	0462-201-16141
RATED CURRENT [A]	4.0 A
OPERATING VOLTAGE [V]	125 V
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
OUTER JACKET MATERIAL/COLOR	PVC/RED
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x16 AWG
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)

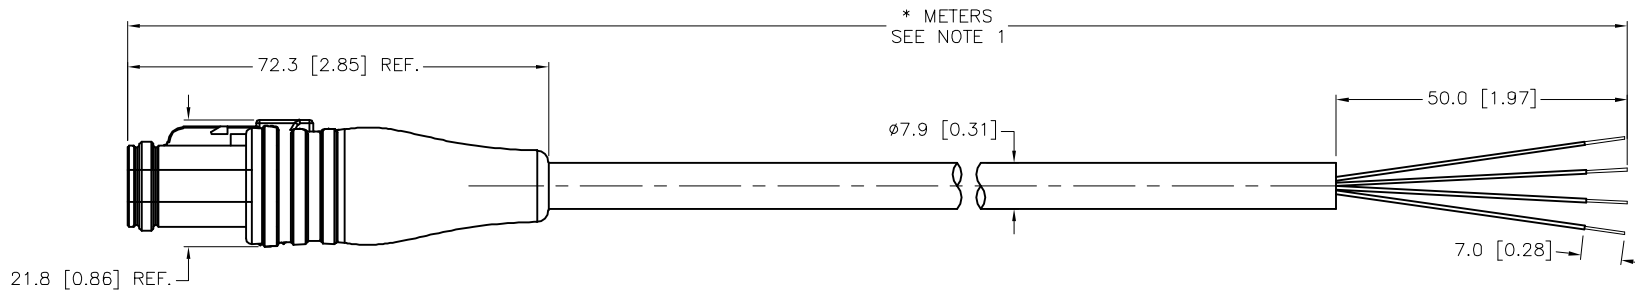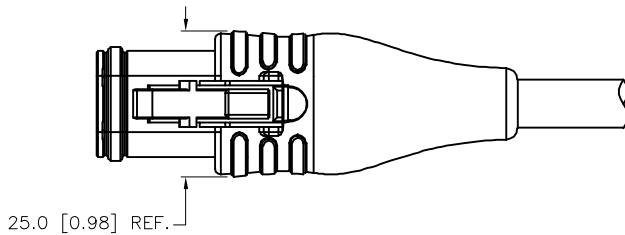


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
1.									
2.									
3.									
4.									
MATERIAL		DRFT RDS		DATE 09/17/19		DESCRIPTION DT06-4S-0925-*M			
SEE SPECIFICATIONS		APVD N.M.		SCALE 1=1.3					
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV B			
SEE SPECIFICATIONS									
		DO NOT SCALE THIS DRAWING		FILE: 777043857		SHEET 1 OF 1			

B	ADDED OPERATING VOLTAGE	ER	04/25/22	77570
REV	DESCRIPTION	BY	DATE	ECO NO.