


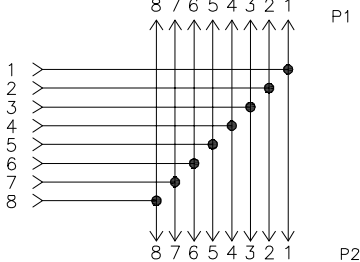


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS			
			CONTACT CARRIER MATERIAL	TPU OR NYLON		
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
			CONTACT MATERIAL/PLATING	BRASS/GOLD		
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
			RATED CURRENT [A]	2.0 A		
			RATED VOLTAGE [V]	60 VAC/75 VDC		
			OUTER JACKET MATERIAL/COLOR	PVC/GRAY		
			CONDUCTOR INSULATION MATERIAL	PVC		
			NUMBER OF CONDUCTORS [AWG]	8x24 AWG		
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)		
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67		

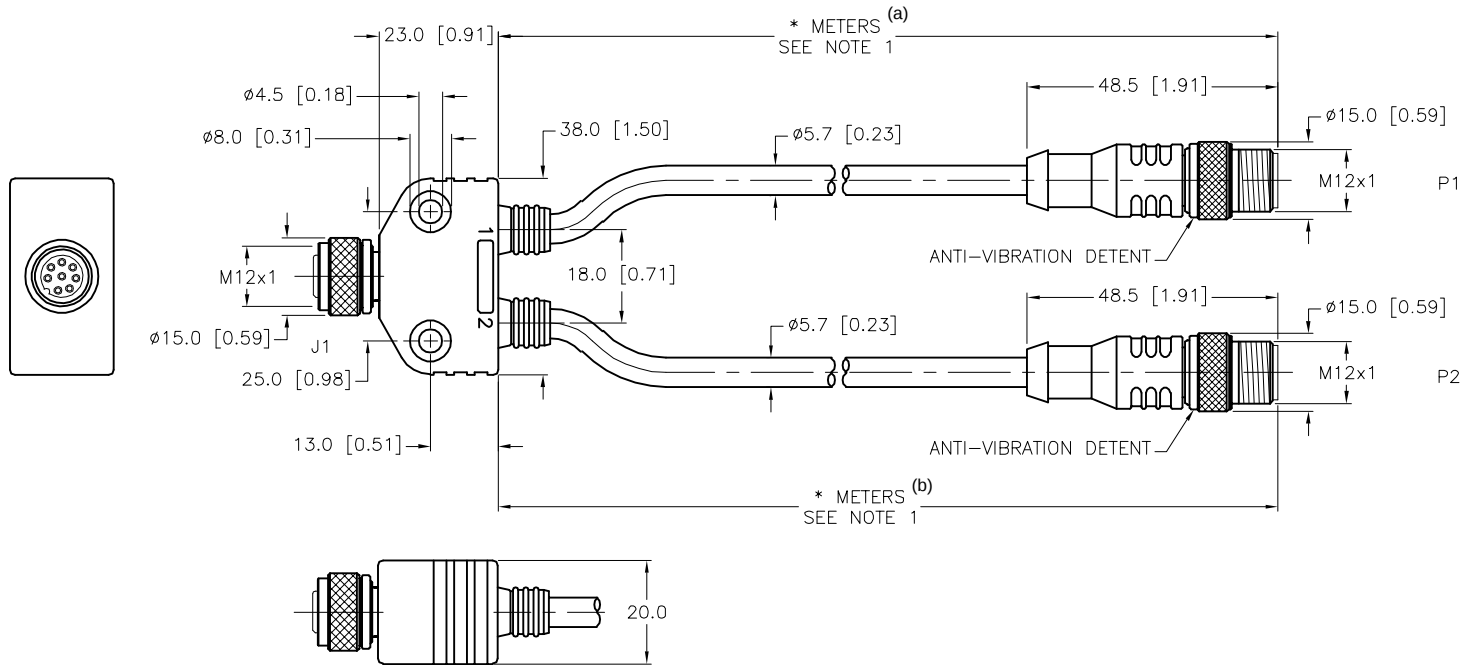


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S651" DESIGNATES PARALLEL WIRING.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
1.									
2.									
3.									
4.									
MATERIAL		DRFT	ER	DATE	02/26/20	DESCRIPTION (a)(b) VB2-FKM8/2RSC8T-*/*/S651			
SEE SPECIFICATIONS		APVD	D.N.	SCALE	1=1.5				
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV A	
SEE SEPCIFICATIONS		MILLIMETER [INCH]							
		DO NOT SCALE THIS DRAWING				FILE: 777044151		SHEET 1 OF 1	

A	DRAWING RELEASE	ER	03/23/20	
REV	DESCRIPTION	BY	DATE	ECO. NO.